Piolas Series

User Manual



www.GCCworld.com

4F., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax:886-2-2694-6875

Release Note

Version	Release date	Remark
01	Jun, 2024	First version
02	Dec, 2024	Minor details revised. Added basic requirement for GCC LaserPro printer driver. Added Chapter 4.2 – Graphics Software Setup.
03	July, 2025	Minor details revised. Added Piolas 400SE to the product list. Modified checklist content. Modified the content of chapter 8.
04	Nov, 2025	Minor details revised. Added Piolas 280 to the product label list.
05	Jan, 2026	Added Piolas 400SE dual model to the product label list.
06	Feb, 2026	Minor details revised. Added Piolas 400SE fiber model to the product label list
07	Jul, 2026	Added GT1 models to the product label list.

Table of Contents

Chapter 1 Safety 8

1.1 Principles of a CO2 Laser 9

1.2 Safety Ratings 9

1.3 The Safety Interlock System 9

1.4 Product Label and Safety Label 10

1.5 Safety Measures 16

1.5.1 General Safety 16

1.5.2 Safety Notice for Class 4 (US: Class IV) Machine 18

1.6 Operating Environment 18

1.7 Noise Test 19

Chapter 2 Unpacking and Content 20

2.1 Unloading and Unpacking 21

2.2 Contents and Accessories Checklist 24

2.2.1 Magnetic Air Suction Adjuster 25

2.2.2 Thin wrench 27

2.2.3 Limit-baffle Set 28

2.2.4 Spirit Level 30

Chapter 3 Mechanical Overview 32

3.1 Front View 33

3.2 Top View 33

3.3 Right View 34

3.4 Left View 34

3.5 Rear View 35

Chapter 4 Setup and Installation 36

4.1 Machine Setup 37
4.1.1 Powering Up the Machine 37
4.1.2 Connecting the Computer 38
4.1.3 USB Storage Setup 42
4.1.4 Local time synchronization 49
4.2 Graphics Software Setup 52
4.2.1 Recommended Computer Configuration 52
4.2.2 Installation of the GCC LaserPro Printer Driver 53
4.3.3 Using Adobe's AP with GCC LaserPro Machine 55
4.4.4 Using Autodesk Inventor with GCC LaserPro Machine 59
4.4.5 Using the GCC SmartTOOL plug-in with GCC Machine 62
Chapter 5 Setup and Installation 63
5.1 Using the Hardware 64
5.1.1 Front Door 64
5.1.2 Emergency Stop 65
5.1.3 Quick Boot Button 65
5.1.4 Laser Key Switch 65
5.1.5 USB Storage 66
5.2.1 Touch Panel Navigation Chart 67
5.1.6 LED Light Switch 68
5.1.7 Touch Panel 68
5.1.8 Control Panel 68
5.1.9 Status Indicator Light 69
5.1.10 SmartEYES CCD 70
5.1.11 Live-View Camera 76
5.1.12 SmartAIR Fine Nozzle 78

5.2 Using the Touch Panel 79
5.2.2 Home Page 79
5.2.2.1 Carriage Movement Page 82
5.2.2.2 Preview Page 83
5.2.2.3 SmartCENTER Page 85
5.2.2.4 Edit Page 86
5.2.3 Machine Settings 88
5.2.3.1 Select Lens 88
5.2.3.2 Tune Auto Focus 89
5.2.3.3 Table Down 90
5.2.3.4 Red Beam 91
5.2.3.5 Carriage Free 92
5.2.3.6 File Save 93
5.2.3.7 Set Standby Mode 94
5.2.3.8 Save Position 96
5.2.3.9 Vector Mode 97
5.2.3.10 Network Setting 98
5.2.3.11 Others 99
5.2.3.12 External I/O Board 100
5.2.3.13 LED Light Setting 101
5.2.3.14 Door Status 102
5.2.3.15 Panel Brightness 104
5.2.4 Advanced Settings 105
5.2.4.1 Administrator Setting 105
5.2.4.2 SmartGUARD 105
5.2.4.3 Laser Firing Time 106

5.3 The LaserPro Printer Driver 107
5.3.1 Page Setup and Orientation 108
5.3.2 Color Management 110
5.3.3 Using the LaserPro Printer Driver 111
5.3.3.1 Piolas series Printer Driver – Options Page 112
5.3.3.2 Piolas series Printer Driver – Pen Page 119
5.3.3.3 Piolas series Printer Driver – Advanced Page 128
5.3.3.4 Piolas series Printer Driver – Paper Page 136
5.2.3.5 Piolas series Printer Driver – Language Page 138
5.2.3.6 Piolas series Printer Driver – Raster Page 139
5.2.3.7 Piolas series Printer Driver – Stamp Page 142
Chapter 6 Setup and Installation 144
6.1 Raster Engraving 145
6.2 Vector Cutting 145
6.3 Vector and Raster 146
6.4 3D Tips 147
6.5 Modify Image Settings of Picture for Better Engraving Quality 155
Chapter 7 Optional Items 158
7.1 Fume Extraction Unit 159
7.2 Air Compressor 161
7.3 Focus Lens Options 164
7.3.1 CO2 Laser Focus Lens 164
7.4 Pass-Through Door Options 167
7.4.1 How to Install Pass-Through Door Switch Option 167
7.4.2 Connect with an External Remote Interlock 169
7.5 Honeycomb Table / Down Vacuum Engraving Table 170

7.6 SmartVISION Elite CCD 172
7.7 Rotary Attachment (Coming soon) 178
7.8 SmartGUARD Fire Alarm Option (Coming soon) 178
Chapter 8 Basic Maintenance 179
8.1 Suggested Cleaning and Maintenance Supplies 180
8.2 Maintaining the Work table and Motion System 183
8.2.1 Accessing the Work Table and Motion System 183
8.2.2 Cleaning the Work Table and Motion System 184
8.2.3 Lubrication of the X & Y Axis 185
8.3 Cleaning the Optics System 188
8.3.1 Removing the Mirrors 188
8.3.2 Cleaning the Mirrors 191
8.4 Cleaning the Exhaust Duct 193
Chapter 9 Basic Troubleshooting 194
Chapter 10 Basic Troubleshooting 197
10.1 Glossary 198
10.2 LaserPro Piolas Series Specification Sheet 199

Chapter 1
Safety

- Principles of a CO_2 Laser
- Safety Ratings
- The Safety Interlock System
- Safety Label
- Safety Measures
- Operating Environment
- Noise Test

1.1 Principles of a CO2 Laser

LASER is the acronym for Light Amplification by Stimulated Emission of Radiation. A CO2 laser works by electrically stimulating the molecules within a carbon dioxide gas mixture. When focused through a lens, this highly-intense and invisible beam will vaporize many material. Depending on the speed and intensity of the projected beam, a CO_2 laser may be used to engrave or cut through a wide variety of material.

1.2 Safety Ratings

The LaserPro Piolas series are equipped with a sealed carbon-dioxide laser that emits intense and invisible laser radiation with a wavelength of 10.6 microns in the infrared spectrum. The laser system is designated as a Class 1 (US: Class I) laser device, meaning that the system is equipped with key safety features and an enclosed laser head to completely contain the laser under normal use. One of the key safety features found on the LaserPro Piolas series is a Class 2 (US: Class II) red beam safety guidance pointer (similar to a laser-pointer presentation pen) allowing the operator to see the exact location where the laser beam will fire.

The LaserPro Piolas 400/400SE Hybrid dual lasers configuration is equipped with dual CO2 and Fiber laser tubes that emits intense and invisible laser radiation with a wavelength of 10.6 microns for CO2 and 1 micron for fiber laser in the infrared spectrum. The laser system is designed as a Class 1 (US: Class I) laser device, meaning that the system is equipped with key safety features and an enclosed laser head to completely contain the laser under normal use. One of the key safety features found on the machine is a Class 2 (US: Class II) red dot safety guidance pointer (similar to a laser-pointer presentation pen) allowing the operator to see the exact location where the laser beam will fire.

Even though the LaserPro Piolas series is equipped with the most powerful laser to date, through proper usage and taking necessary hardware safeguards, will make it an extremely safe machine.

When the front door and back door are open, machine becomes a Class 4 (US: Class IV)equipment and users must wear goggles to operate the machine.

1.3 The Safety Interlock System

The laser system is equipped with a safety interlock system utilizing magnetic sensors on the top and side access doors, laser-activation and door LED lights on the control panel. The magnetic sensors will deactivate the laser when either door is open. At this time, the “door” LED light found on the Touch Screen will illuminate, indicating an open or improperly closed door. When the laser is in operation, the “laser” LED will illuminate to inform the operator that the laser is activated. If at any time, any of the access doors are open and the “laser” LED is illuminated, IMMEDIATELY unplug the laser system and contact GCC service team for technical support and maintenance instructions.

WARNING!

- **DO NOT operate the laser system if any component of the safety system is malfunctioning.**
- **DO NOT attempt to remove or modify any component of the safety interlock system.**

1.4 Product Label and Safety Label

According to CDRH standards, all fixed or removable covers that allow access to a laser beam must have an appropriate laser warning label attached to them. These warning labels must be clearly visible to the operator prior to removing the cover. Additional labels must be applied to the interior of the machine and be visible in the event when the covers are removed. A label clearly displaying the manufacturer's name, date of manufacture, description of product, model number, serial number, and compliance statement must be attached to the outer surface of the machine.

In compliance with CDRH standards, the required warning labels are affixed at the time of manufacture to the LaserPro Piolas series, attached on appropriate locations. These labels are not to be modified in any way or removed for any reason. Please familiarize yourself with the specific labels and their locations on the machine. Below is a list of all the safety labels and their locations on the machine.

Product Label

This label is located at the right side of machine. All the product information such as Serial Number, Model Numbers, Laser Power and Electric power can be found here. Before requiring any further tech support, always provide the service person with the information on this label.



Product label example

NOTE

If the pass-through door switch module is standard, the product label will indicate the laser safety level of CDRH as Class 4 (US: Class IV).



Please refer to the following table to view all available models and related information.

Piolas series			
Model Number	Wavelength	Power	Input
Piolas 280-80GT	10.57 – 10.63 μm	CO2 80W	200-240VAC, 50-60Hz, Max 13A
Piolas 280-100GT	10.57 – 10.63 μm	CO2 100W	200-240VAC, 50-60Hz, Max 13A
Piolas 280-120GT	10.57 – 10.63 μm	CO2 120W	200-240VAC, 50-60Hz, Max 13A
Piolas 400-80GT	10.57 – 10.63 μm	CO2 80W	200-240VAC, 50-60Hz, Max 13A
Piolas 400-100GT	10.57 – 10.63 μm	CO2 100W	200-240VAC, 50-60Hz, Max 13A
Piolas 400-120GT	10.57 – 10.63 μm	CO2 120W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-60GT	10.57 – 10.63 μm	CO2 60W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-60GT1	10.57 – 10.63 μm	CO2 60W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-80GT	10.57 – 10.63 μm	CO2 80W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-80GT1	10.57 – 10.63 μm	CO2 80W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-100GT	10.57 – 10.63 μm	CO2 100W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-120GT	10.57 – 10.63 μm	CO2 120W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-30JML	1064 nm	Fiber 30W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-60JML	1064 nm	Fiber 60W	100-240VAC, 50-60Hz, Max 13A


Piolas 400SE-60GT/30JML	10.57 – 10.63 µm & 1064 nm	CO2 60W & Fiber 30W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-60GT1/30JML	10.57 – 10.63 µm & 1064 nm	CO2 60W & Fiber 30W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-60GT/60JML	10.57 – 10.63 µm & 1064 nm	CO2 60W & Fiber 60W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-60GT1/60JML	10.57 – 10.63 µm & 1064 nm	CO2 60W & Fiber 60W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-80GT/30JML	10.57 – 10.63 µm & 1064 nm	CO2 80W & Fiber 30W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-80GT1/30JML	10.57 – 10.63 µm & 1064 nm	CO2 80W & Fiber 30W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-80GT/60JML	10.57 – 10.63 µm & 1064 nm	CO2 80W & Fiber 60W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-80GT1/60JML	10.57 – 10.63 µm & 1064 nm	CO2 80W & Fiber 60W	100-240VAC, 50-60Hz, Max 13A
Piolas 400SE-100GT/30JML	10.57 – 10.63 µm & 1064 nm	CO2 100W & Fiber 30W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-100GT/60JML	10.57 – 10.63 µm & 1064 nm	CO2 100W & Fiber 60W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-120GT/30JML	10.57 – 10.63 µm & 1064 nm	CO2 120W & Fiber 30W	200-240VAC, 50-60Hz, Max 13A
Piolas 400SE-120GT/60JML	10.57 – 10.63 µm & 1064 nm	CO2 120W & Fiber 60W	200-240VAC, 50-60Hz, Max 13A

Safety Label

This label is located at the right side of machine. All the product information such as Serial Number, Model Numbers, Laser Power and Electric power can be found here. Before requiring any further tech support, always provide the service person with the information on this label.

❶ Door Open Warning Label



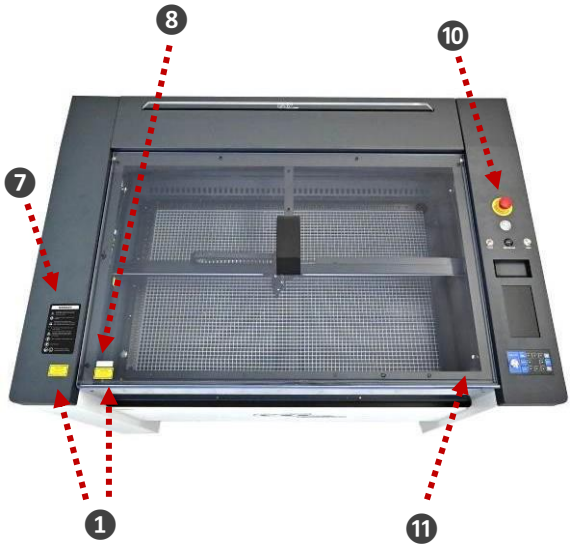


❷ CDRH Label

This label indicates the class of CDRH



If the pass-through door switch module is standard, the product label will indicate the laser safety level of CDRH as Class 4 (US: Class IV)

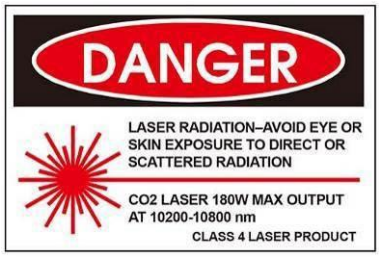



❸ CE Label

This label indicates the class level of CE.



❹ Pass-through Door Warning Label



❺ Aperture Warning Stickers (mirror)

This label indicates the laser path. Normally you can find this label inside of machine or laser exit. Please take extra caution of this area when you conduct maintenance or operate machine.





❻ Noninterlocked Protective Housings Label

This label indicates that the laser path will be exposed when the user removes/opens the cover.



❼ Warning Label

Warning label is written with all necessary information to be aware of during operation.





❽ Laser Path Warning Label

LaserPro machines are very safe under normal use. Furthermore, Laser Path Warning Label are displayed at the proximities of possible laser paths as a reminder. Operators should exercise caution when working close to the laser paths to avoid possible injury while machine is turned on.





❾ Laser Path Danger Label

This label indicates the laser path. Normally you can find this label inside of machine. Please take extra caution of this area when you conduct maintenance.






❿ Emergency Stop Label

This label indicates the emergency stop button. You can find this label on the right upper side of the machine.



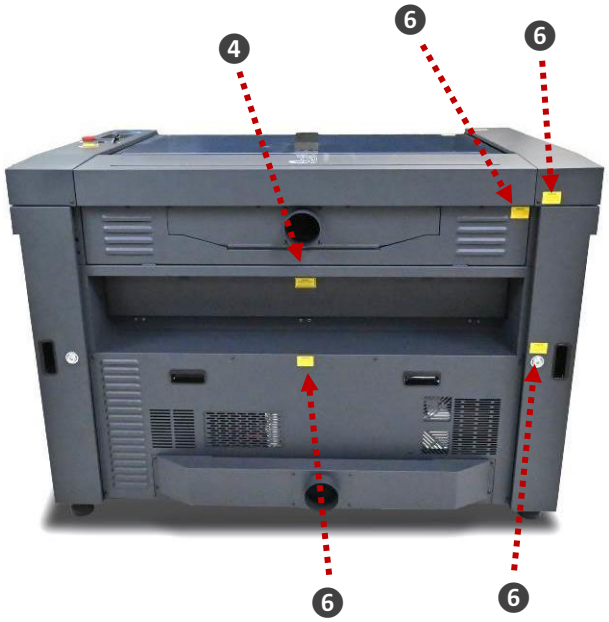

⓫ Protection Window Label

This label indicates the protection wavelength. You can find this label in the lower right comer of window.



⓬ Pass-through Door Switch Module Label



⓭ Warning Label – Avoid Injury

This label is located on the top lid, to warn & avoid injury when closing the door. When closing the door, please ensure your hands on the top lid until the door is close completely.





1.5 Safety Measures

1.5.1 General Safety

- LASER RADIATION WARNING: Exposure to laser radiation may result in physical burns and severe eye damage. Proper use and regular maintenance of this machine is important to the safety of all people in the immediate area.
- Prior to operation, carefully read and familiarize yourself with the warning label located on both your laser system and in this manual.
- Never leave the machine unattended during the laser cutting and engraving process. The laser may ignite combustible material. A well-maintained fire extinguisher and operational smoke or fire detector should be kept in the vicinity of the machine.
- Caution—Use of control or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- Resulting debris from laser cutting are very dangerous and may cause fire hazard.
- DO NOT leave debris and scraps inside laser machine after job finished. Always keep machine clean after job finished.

NOTE

SmartGUARD™ is an optional fire detection alarm system developed by GCC.
Contact your local GCC authorized distributor for more detail to have this safety option installed.

WARNING!

- **Resulting debris from laser processing are very dangerous and may cause fire hazard.**
- **DO NOT leave debris and scraps inside laser machine after job finished. Must keep machine clean after job finished.**
- **Always remove the vector grid to clean any small pieces that have fallen through the grid.**

- Enable the SmartAIR™ nozzle when engraving or cutting materia that may easily ignite, such as acrylic, wood, or paper.
- Always wear safety goggles when the laser system is in operation. Reflective materia such as mirrors, enameled brass and anodized aluminum may partially-reflect some of the invisible laser radiation. Severe eye damage may occur if proper safety goggles are not worn.
- Connect the machine to a properly grounded power outlet. Ensure the voltage of the power source is identical to the voltage of the machine.

WARNING!

To avoid any unexpected issues, please ensure that the grounding of the power outlet complies with local electrical regulations.

- Do not open the laser access panel when the machine is plugged in.
- Do not attempt to modify or disassemble the laser module.
- Do not attempt to remove or modify any component of the machine's laser interlock safety system.
- Ensure the immediate work area of the machine is well-ventilated. Odors, vapors, and dust are by products generated during the laser engraving and cutting process. An exhaust system, vacuum cutting box, and honeycomb table are recommended. Please contact GCC or your local GCC distributor for more information.
- Do not laser heat-sensitive surfaces or materia that may generate toxic fumes, such as PVC and Teflon.

- Regularly clean and maintain your machine according to our cleaning and maintenance Instructions in Chapter 8. Doing so will ensure your machine will operate effectively and safely over a long period of time.

1.5.2 Safety Notice for Class 4 (US: Class IV) Machine

When the optional Pass-Through door module is installed, the laser system becomes a Class 4 (US: Class IV) machine with front and rear doors open, machine operators must wear goggles and follow the safety instructions to operate the machine.

Exposure to a Class 4 (US: Class IV) laser beam via direct radiation and indirect stray radiation may cause damage to both skin and eyes. Exposure to the Class 4 (US: Class IV) laser beam may cause ignition of combustible material which can lead to a fire. A proper and well-maintained fire extinguisher should keep on hand next to the laser machine all the times.

The machine operator is responsible to take all necessary protective measures to prevent he possible ignition or explosion of material by the laser beam. A Class 4 (US: Class IV) laser system should be operated according to the following precautionary measures among others:

- The operator is obliged to appoint **a trained Laser Protection Officer** responsible for compliance with the relevant regulations.
- **Identify the danger zone** by installing **warning lights** and **warning signs** outside the area.
- **The danger zone must be secured against unauthorized access.**
- The operator of a Class 4 (US: Class IV) laser system should always **wear laser protection goggles** suitable for the laser wavelength in use and with optical density at least OD5+ within the danger zone.
- An additional warning light should a o be installed in a visible location to warn the machine operator of any emerging laser radiation.

1.6 Operating Environment

Please follow the guidelines when considering a suitable location to set the LaserPro Piolas series. Improper work environments may lead to operational malfunction and/or unsafe working conditions. The LaserPro Piolas series should be placed and operated in a standard office-type environment.

- Avoid environments where the machine is exposed to high level of dust, temperature (temperature exceeding 30°C or 85°F) or humidity (humidity exceeding 70% or where the ambient temperature is near the dew point).
- Avoid small, enclosed areas with poor ventilation.
- Avoid areas with high level of noise and electrical noise.

- Select a location that is large enough to accommodate the LaserPro Piolas series, an exhaust system, a computer and a work or storage table.
- Select a location in which the ambient temperature remains between 15°C and 30°C (60°F to 85°F).
- Select a location in which the relative humidity remains between 30% - 40%.
- Select a location in which there is a short, direct path to the fume exhaust system.
- Set the LaserPro Piolas series on a floor surface that is completely even.
- Make sure your smoke or fire detection system in the immediate area is functioning.
- Setup the machine to be apart from the wall for at least 60 cm (2 feet).

1.7 Noise Test

Test Conditions: measured at a distance of 1 meter from the surface of the machinery and a height of 1.6 meters from the floor or access platform.

- Piolas series 100W Sound Test Result: 70.2 dB

Chapter 2
Unpacking and Content

- Unloading and Unpacking
- Contents and Accessories Checklist

2.1 Unloading and Unpacking

GCC LaserPro laser engraver is shipped in one crate that contains the machine, the software and other accessories. The following section has a detailed list of the steps required for unpacking and packaging of the machine.

WARNING!

More than one person may be needed when loading and unloading the shipping crate to avoid body injury or damage to the machine.

NOTE

Please save the original shipping crate. If the machine must be returned for product servicing, it will need to be packed in its original shipping crate.


Installation location

Before unpacking the laser system, make sure the location in which you intend to install the laser system will provide at least **2 feet (0.6meter)** of clearance on all sides of the machine.


Unpacking and Unloading

Move the shipping crate close to the desired working location of the machine. Unpack following the steps below.


Step 1. Remove the wooden package including top board.

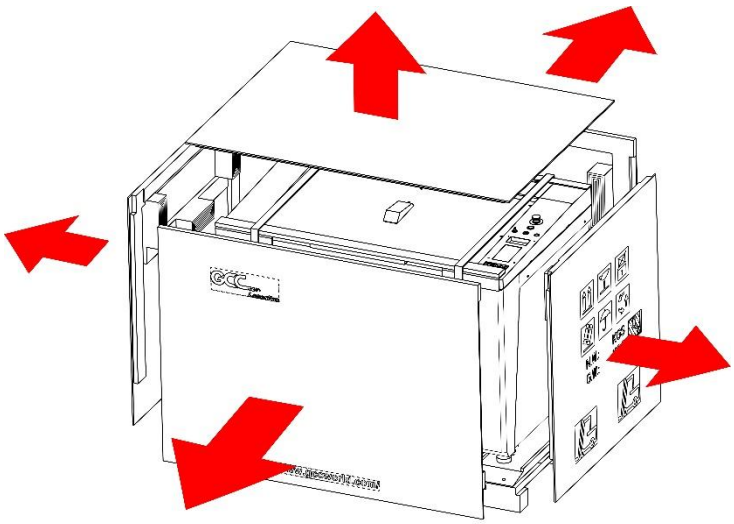


Step 2. Remove the two strings.

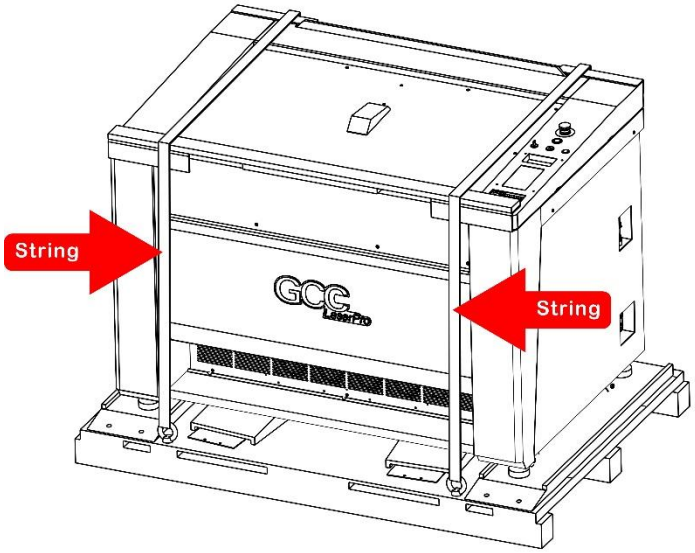

Step 3. Place the ramps as shown below and the machine can now be pushed off the wooden base board via the ramps. (The ramps are found in a box within the crate)

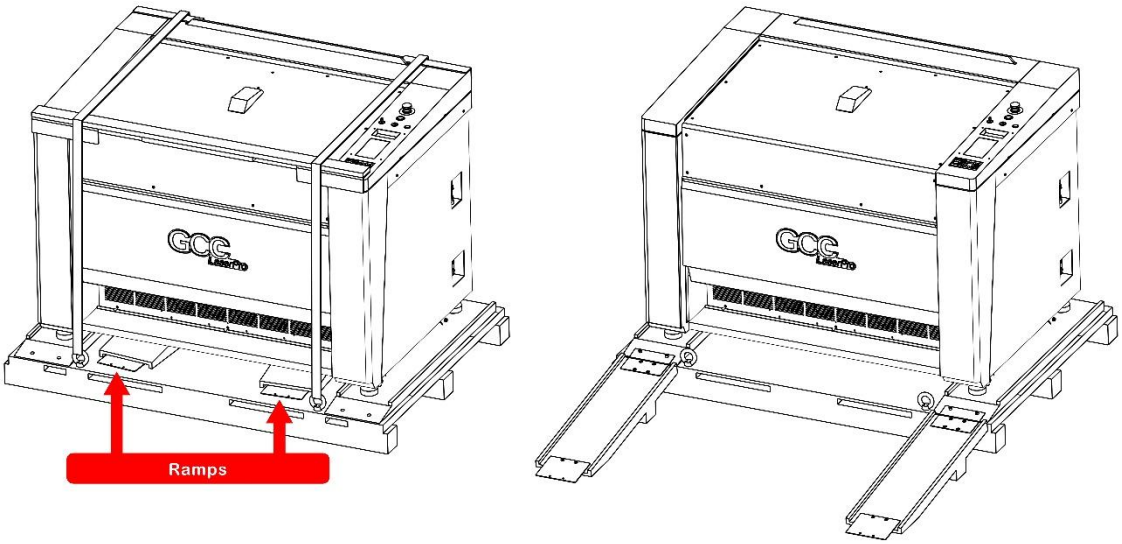

Step 4. The machine can now be pushed off the base board.

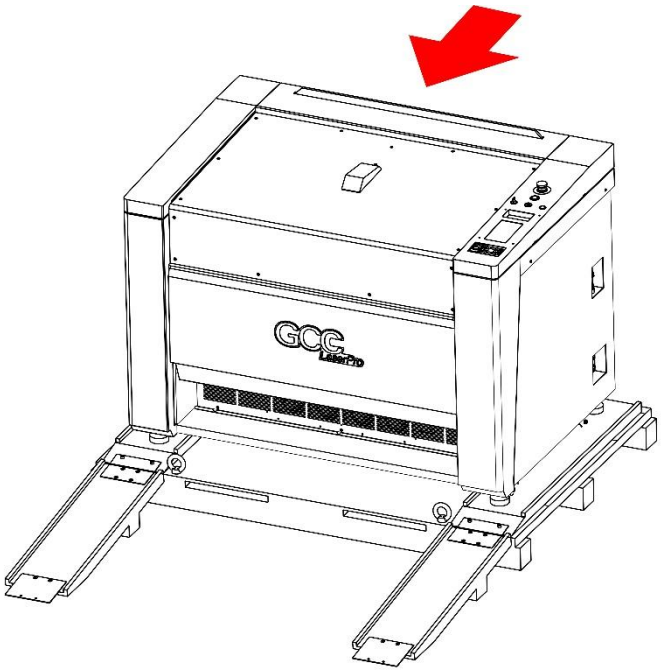

Step 5. Now you can move the machine to the desired location. DO NOT push the top lid when moving the machine, as this may cause it to deform.



Step 6. Unpacking process is completed.

2.2 Contents and Accessories Checklist

Please check to make sure that all of the following items are included within the shipping crate. If any of the following items are missing, immediately contact your local GCC distributor.



Accessory Check List

Model: ☐ Piolas 400 ☐ Piolas 400SE

Wattage : CO_2: ☐ 80W ☐ 100W ☐ 120W

Power Cord

Item	Quantity	Item	Quantity
☐ Main Power Cord	1 Piece		

Data Transmission Cable

☐ USB Cable	1 Piece		

Cleaning Tools

☐ Cleaning Tissue	1 Pack	☐ Cotton Swab	1 Pack

Others

☐ 4" Hose Connector Set (M4 x 8 Hex Socket Head Cap Screw x 4 included)	1 Set	☐ Thin Wrench	1 Piece
☐ CO2 Goggles	1 Piece	☐ SmartPIN Auto Focus	1 Piece
☐ Laser Firing Control Key	2 Piece	☐ Manual Focusing Tool	1 Piece
☐ V30 RJ-45 Laser Signal Cable 2100 mm	1 Piece	☐ Magnet	3 Piece
☐ Label of Customer Service	1 Piece	☐ Gradienter	1 Piece
☐ 5" Hose Connector Set	1 Pack	☐ Hex Wrench	1 Piece
☐ SmartEYES™ Calibration Material (Place below the working table)	1 Piece	☐ 4 mm Air Nozzie	1 Piece
☐ Star Hex Wrench	1 Piece	☐ Injector Tool (Lubricant not included)	1 Set
☐ SmartEYES™ CCD	1 Piece		

Optional Items

☐ Air Compressor 220V	1 Piece	☐ CCD Module	1 Set
☐ Air Compressor 110V	1 Piece	☐ External Signal Indicator	1 Piece
☐ Rotary Attachment	1 Piece	☐ Down Vacuum Engraving Table	1 Piece
☐ SmartGUARD Fire Alarm	1 Piece	☐ 5" hose (M4 x 8 Hex Socket Head Cap Screw x 4 included)	1 Piece


www.GCCworld.com

GCC Headquarters 4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax : 886-2-2694-6875
GCC China No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax : 86-512-5726-1518
GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367 Fax : 31-10-451-9874
GCC America, Inc 20550 Carrey Road, Walnut, CA 91789, USA 1-909-718-0248
US & Canada Only Toll Free 1-888-284-5211


Next, we will introduce the usage of some tools from the accessory box. We hope these tools will bring you convenience when using GCC laser machines.

2.2.1 Magnetic Air Suction Adjuster


These three magnetic air suction adjusters can help you manually adjust the suction volume and direction.

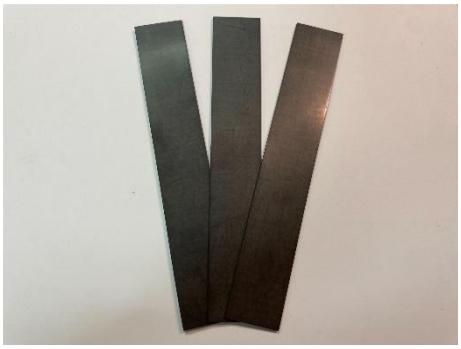


Step 1. Here are the exhaust holes, located at the top of the working area.

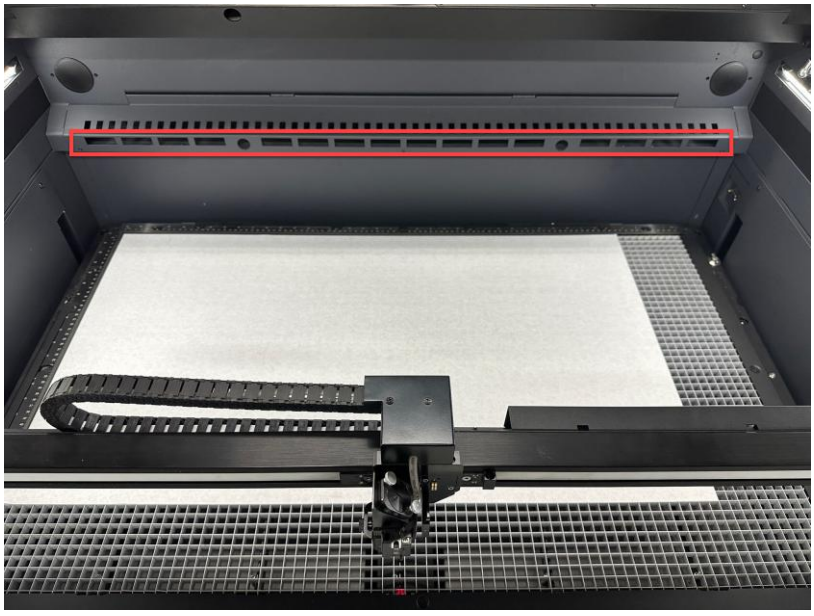

Step 2. Using the magnet to block the holes to adjust the vacuum direction and volume.

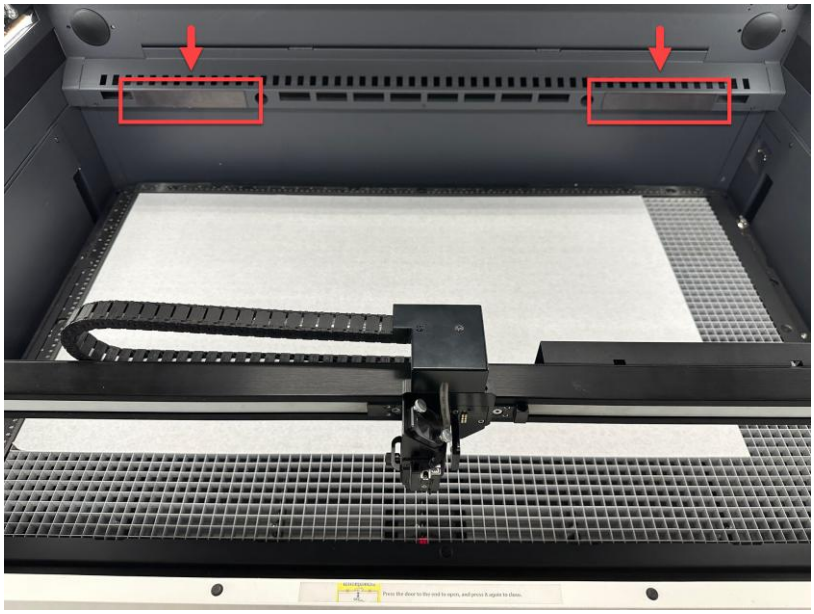


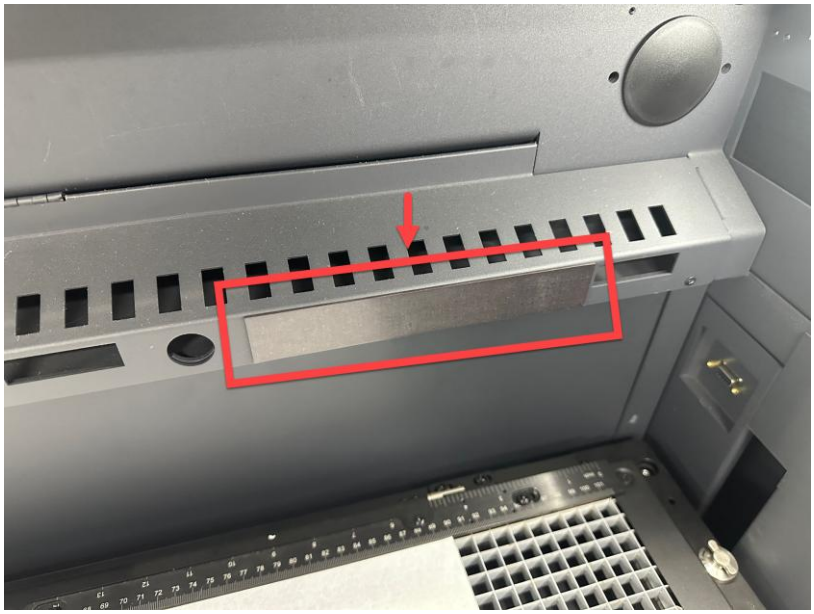


2.2.2 Thin wrench

The thin wrench is to help you remove the standard nozzle from the carriage with ease. You can find it from the accessory box.



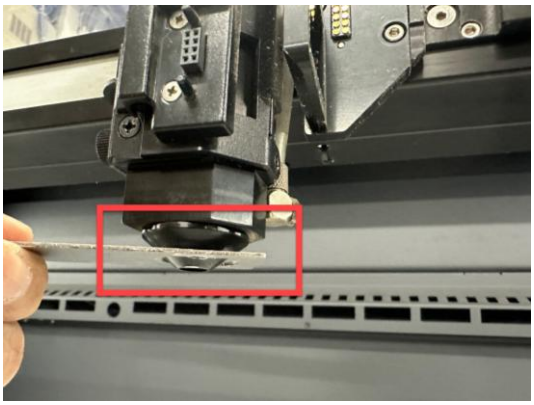

From the following picture, you can use the thin wrench to remove nozzle from carriage easier.

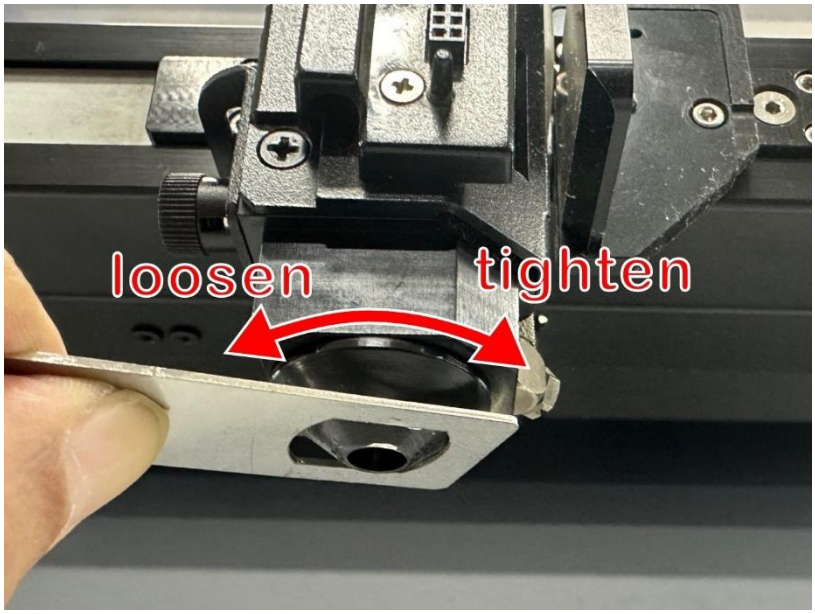


NOTE

The tip is to ensure the thin wrench fits securely within the groove of the nozzle.


2.2.3 Limit-baffle Set


The limit-baffle set can help you achieve alignment by extending the ruler's height when using the raising tool to lift the engraving/cutting materials. We have L-size and M-size included within the accessory box that can extend the height of the ruler by 10mm/5mm.

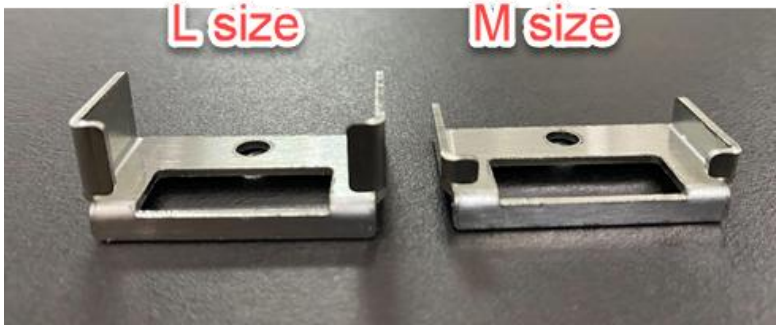


There are six holes on the X-axis and four holes on the Y-axis to fix the limit-baffles. You can fix the limit-baffle set according to your needs using the screws that come with the limit-baffle sets.

X axis

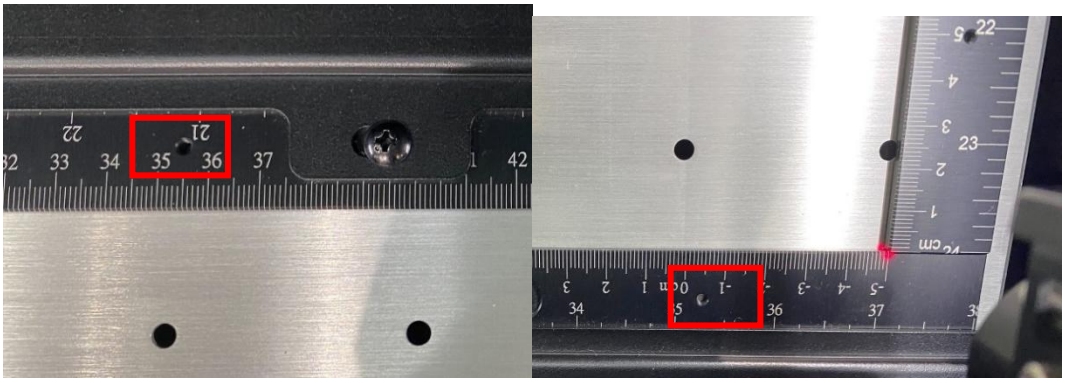

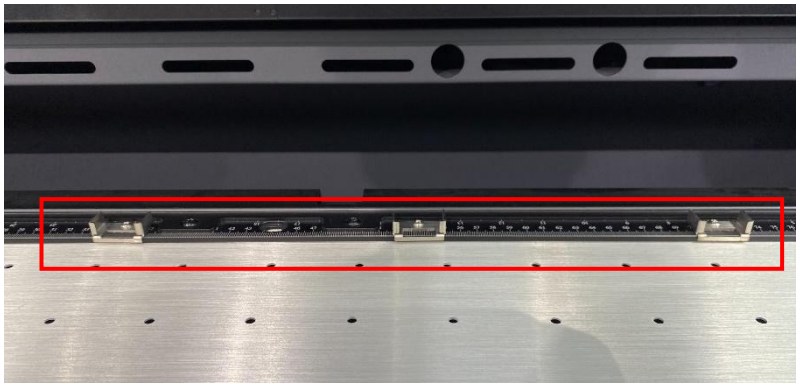


Y axis

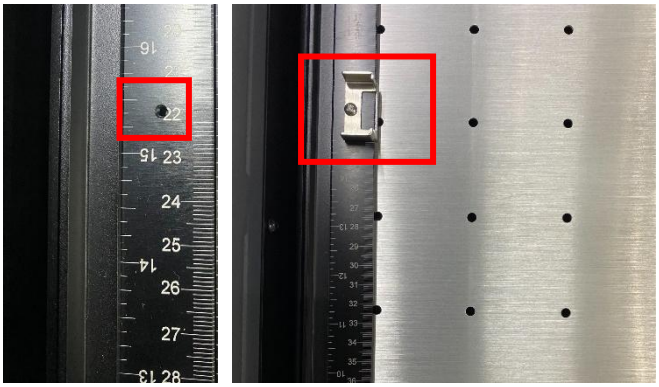


From the following pictures, you can clearly see that the materials can still be aligned with the ruler even when lifted by the raising tool.

X axis

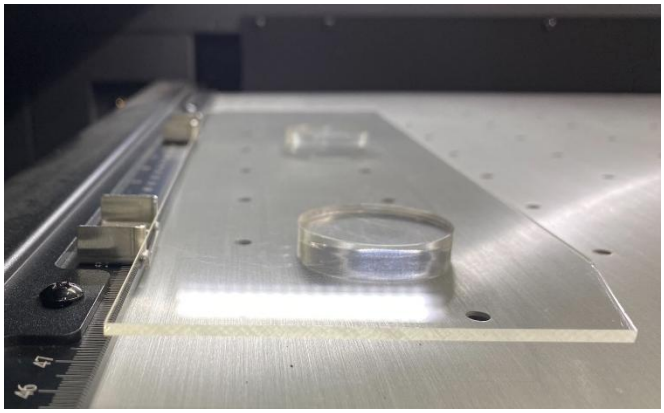

Y axis

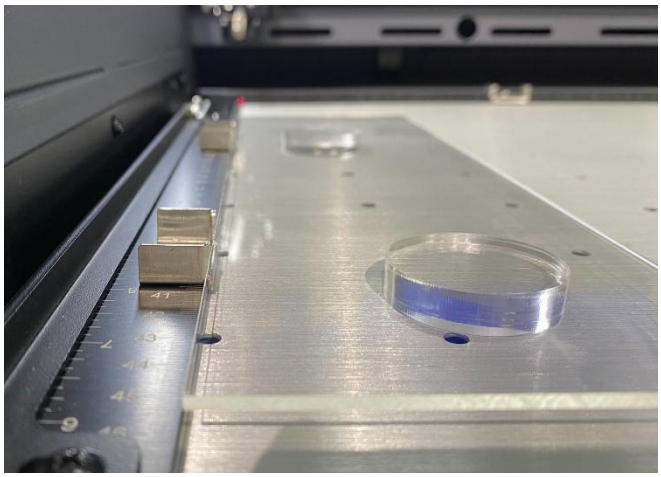

2.2.4 Spirit Level

A spirit level can help you adjust the horizontal of the entire machine once you finish installing it.



Step 1. Please move the gantry to the middle of the working area, then place the spirit level in the middle of the gantry.



Step 2. If the spirit level displays an imbalance, please adjust the level of the machine until the spirit level displays horizontal.





Step 3. Level adjustment is completed.




Chapter 3
Mechanical Overview


- Front View
- Top View
- Right View
- Left View
- Rear View

Please take some time to familiarize yourself with this section regarding the mechanical overview of the LaserPro Piolas series. References will be made back to the different parts of the LaserPro Piolas series in later sections.


3.1 Front View

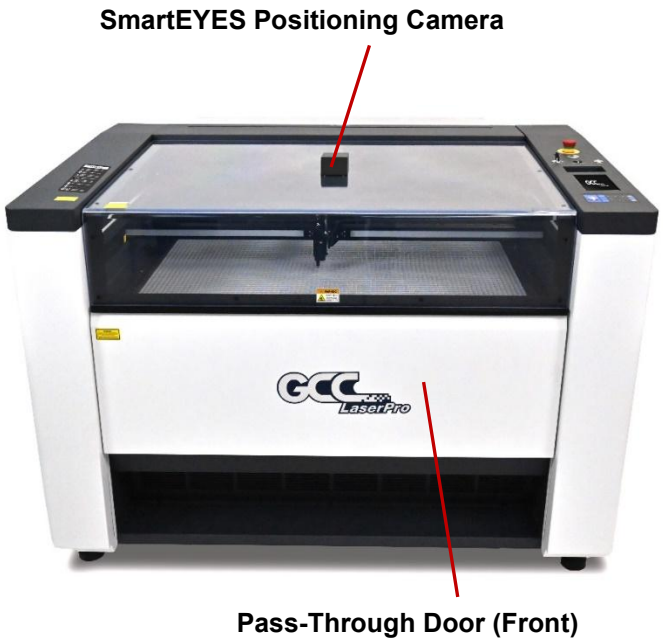

3.2 Top View

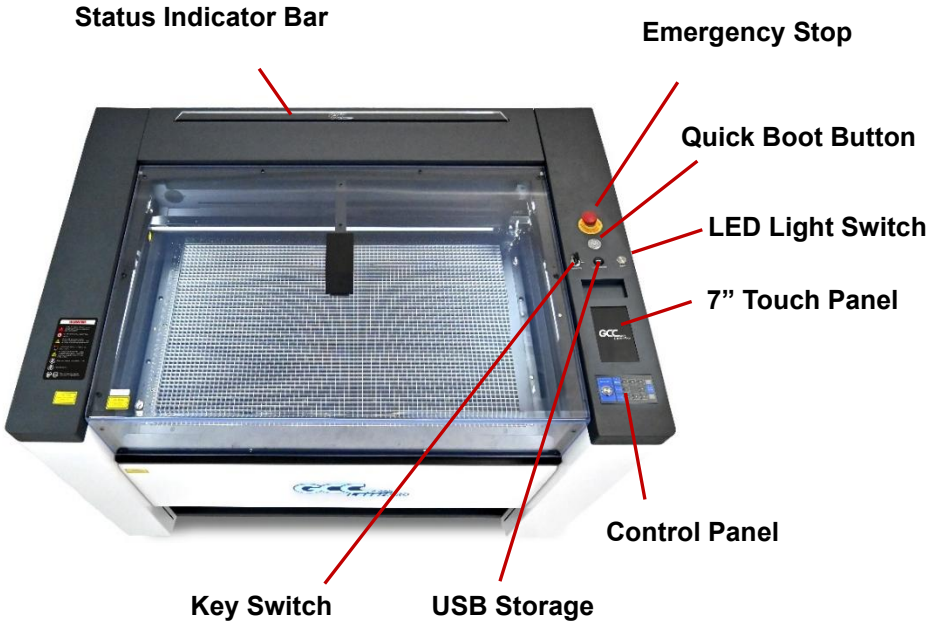


3.3 Right View

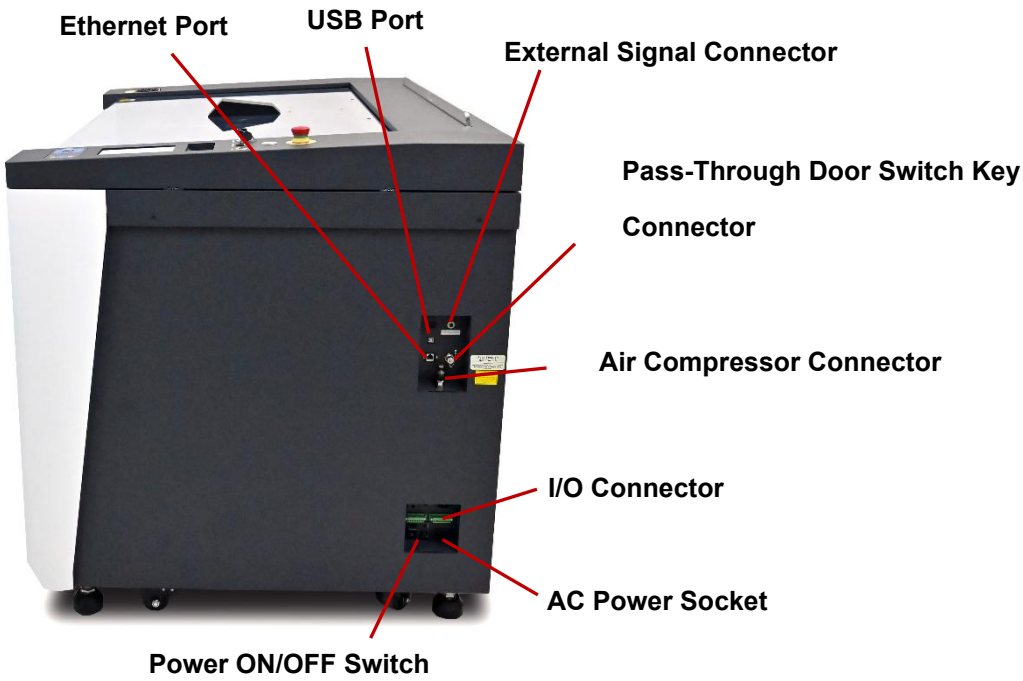

3.4 Left View



3.5 Rear View

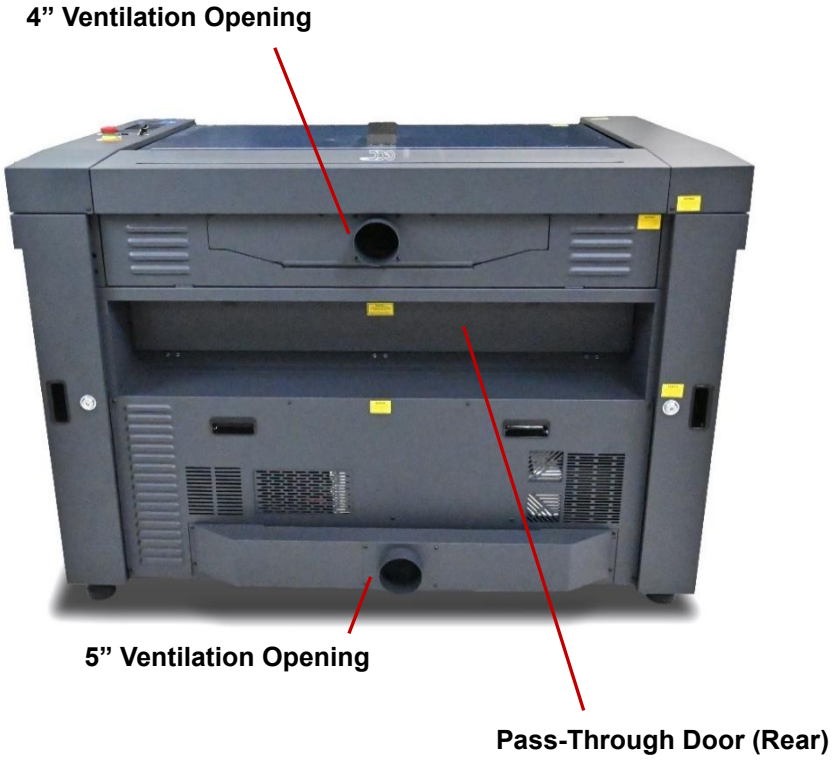
4” Ventilation Opening
5” Ventilation Opening
Pass-Through Door (Rear)

Chapter 4
Setup and Installation

- Machine Setup
  - Powering Up the Machine
  - Connecting the Computer
  - USB Storage
- Graphics Software Setup
  - Recommended Computer Configuration
  - Installation of the GCC LaserPro Printer Driver
  - Using Adobe's AP with GCC LaserPro Machine
  - Using Autodesk Inventor with GCC LaserPro Machine
  - Using the GCC SmartTOOL plug-in with GCC Lasers

4.1 Machine Setup

4.1.1 Powering Up the Machine

CAUTION!

Make sure both the LaserPro Piolas series and the computer are turned off before connecting either to a power source.

1) Connect the male end of the power cord to a quality surge protector and then connect the surge protector to a properly grounded outlet.

2) Do the same for the computer system.

3) Connect the air compressor and external air extraction system to the laser machine before powering up. The connection and setup of air compressor and air extraction system refer to Chapter 7 for detail.

4) Connect the female end of the power cord into the machine's power cable inlet located on the right side of machine.



NOTE

- The LaserPro Piolas series has been designed to automatically switch from 200-240 VAC
- Make sure to supply 220 VAC of electricity to the LaserPro Piolas series with laser 80 Watt and above.

4.1.2 Connecting the Computer

The LaserPro Piolas series can communicate with a computer through a USB Port or LAN Port connection interface. Regardless of the connection method chosen, you will need to connect the respective connection cable from the LaserPro Piolas series to your computer.

USB Connectivity: Connect the included USB Cable to the USB Port on the right-hand side of the laser system.

Ethernet Connectivity: Connect the Ethernet Cable in accessory to the Ethernet port on the right-hand side of the laser system. Follow below instruction for Ethernet connectivity setup.

NOTE

1. Never leave laser system unattended during laser cutting, engraving, and marking process, even with Ethernet or Wi-Fi connection setup, this requirement cannot be avoided. Exposure to the laser beam may cause ignition flame to combustible material.
2. DO NOT connect USB cable when using Ethernet function for data transmission.
3. If you have purchased additional Optional Accessories for the LaserPro Piolas series, please refer to chapter VII for instructions on how to properly setup your optional accessories. These should be setup prior to working with your LaserPro Piolas series.


4.1.2.1 Networking Connectivity Setup

GCC laser engraver is built-in with LAN port to enable multiple laser engravers to be operated by one PC and multiple PCs to share a single unit of laser engraver. Follow the setup instructions below.


DHCP ON instruction:

Step 1. Connect LAN cable to the LAN port of GCC laser engravers and turn on machine.


Step 2. Navigate the Touch Screen through <Machine Setting> → <Network Setting>, and turn on the “DHCP”, then click the Save button to save the setting. The machine will reboot automatically.

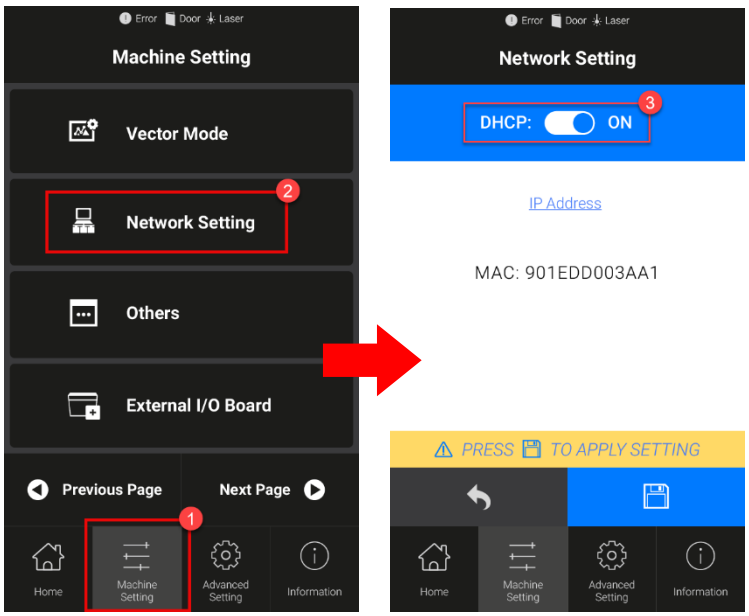


Step 3. Press Windows + I to open the settings app. Click “Navigation” icon to open the menu, then click “Bluetooth & devices” > “Printers and scanners”.

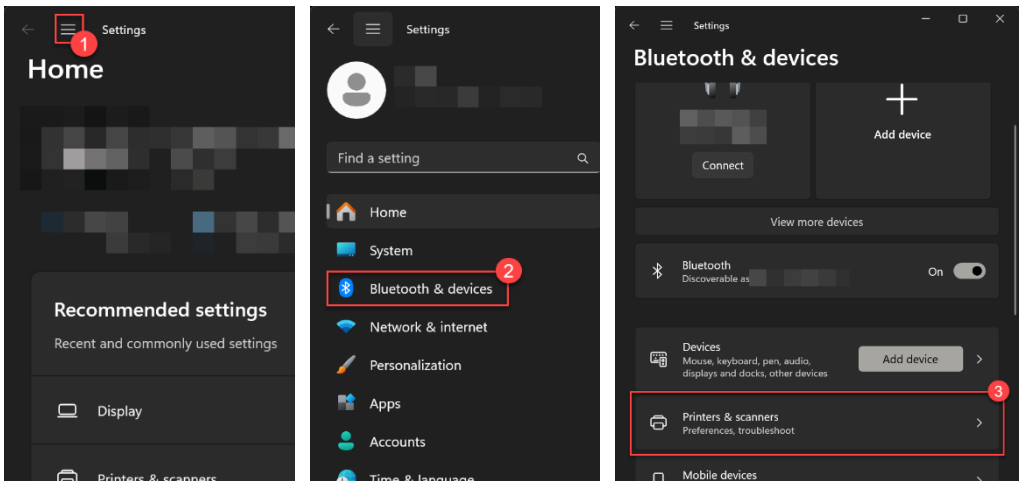

Step 4. Select Piolas 280 / 400 / 400SE, then select “Printing preference”. The printer driver window will appear at the top.

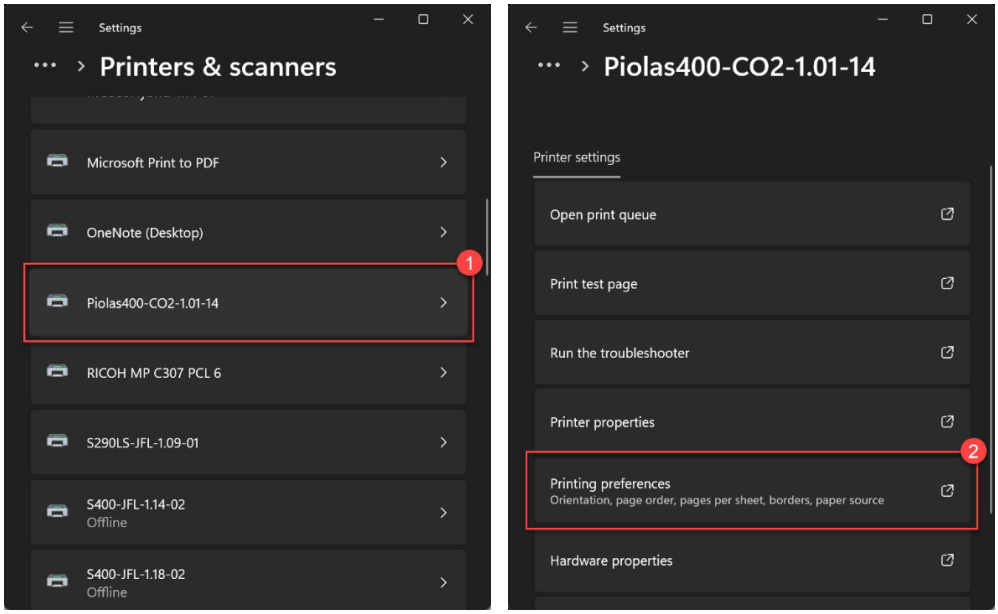


Step 5. Click the “Port” button to open the “Port Configure” window.

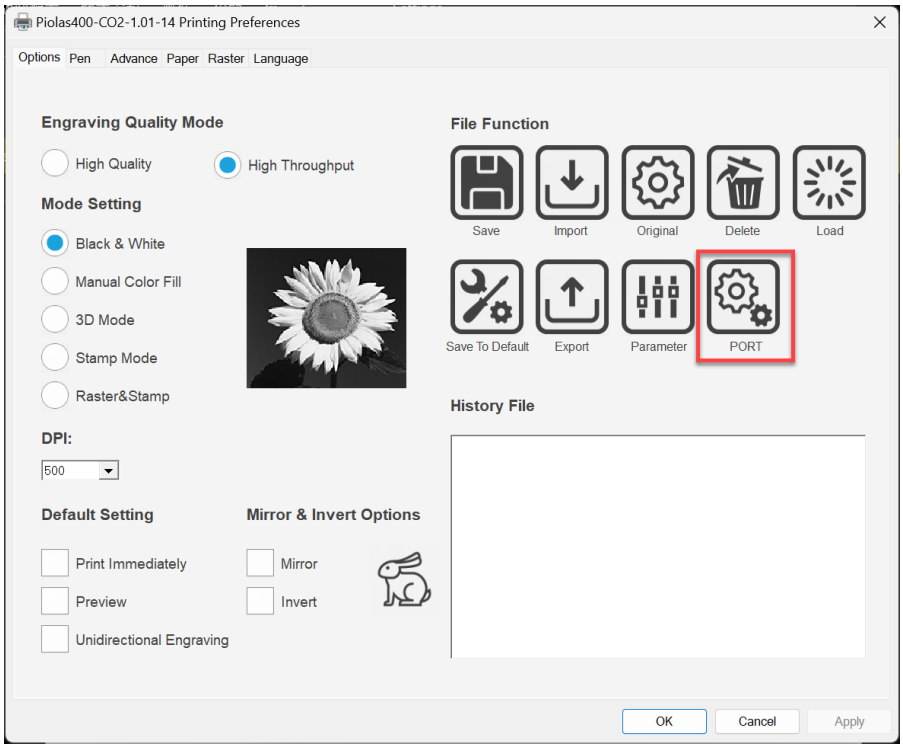


Step 6. Select “LAN” and click “OK” button. The operating system will display a Windows Security window. Please click the “Allow” button to continue.



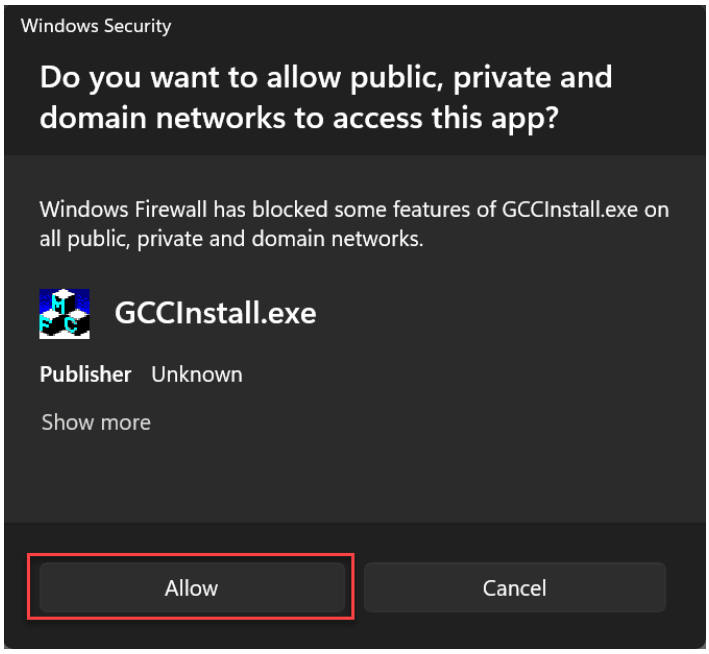


NOTE

If the system displays the following message, please check that your Ethernet cable is connected properly and without any issues.



Step 7. The “Device List” window will open, double-click your machine and the system will run some settings automatically.

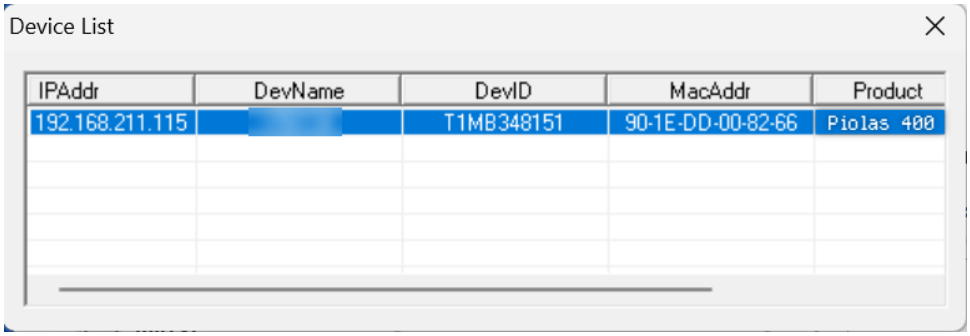

Step 8. Connection is completed.

4.1.3 USB Storage Setup

GCC laser engraver is built-in with USB storage port allow you to transmit data from USB flash drive. You can format and use a USB flash drive as an USB storage of GCC laser engraver.

USB flash drive minimum requirements

- Windows FAT16/FAT32 file system format
- A maximum of 32G of storage capacity

Following are our certified brands for GCC LaserPro USB storage

Brand	Size	Format
HP	16G	FAT32
SanDisk	16G	
PNY	8G	
Kingston	8G / 16G	
Transcend	4G / 16G	
ADATA	8G / 32G	


NOTE

- USB storage port of GCC laser engraver is compatible with USB 2.0.
- Please use above certified brands for GCC LaserPro USB storage.
- Using USB 3.0 or other brands which are not in the list may cause an exception.


Please refer to the following instruction to convert the file to PRN format.

Step 1. Make sure the page setup and orientation are match GCC LaserPro Piolas 280 / 400 / 400SE. Please refer to chapter 5.3.1 for page setup and orientation.

Step 2. Open the file in graphics software and click File → Print from menu bar, and the Print window will appear.

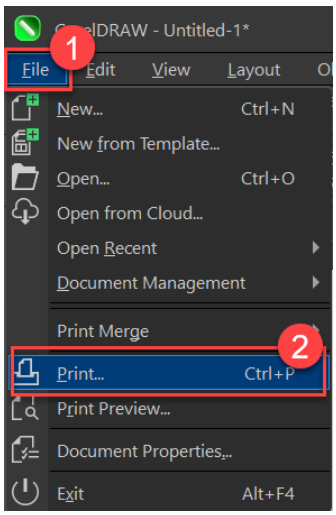


Step 3. Choose PRN Converter Piolas 280 / 400 / 400SE printer driver form the drop-down menu of the printr in the print window. Then click the print button to continue.

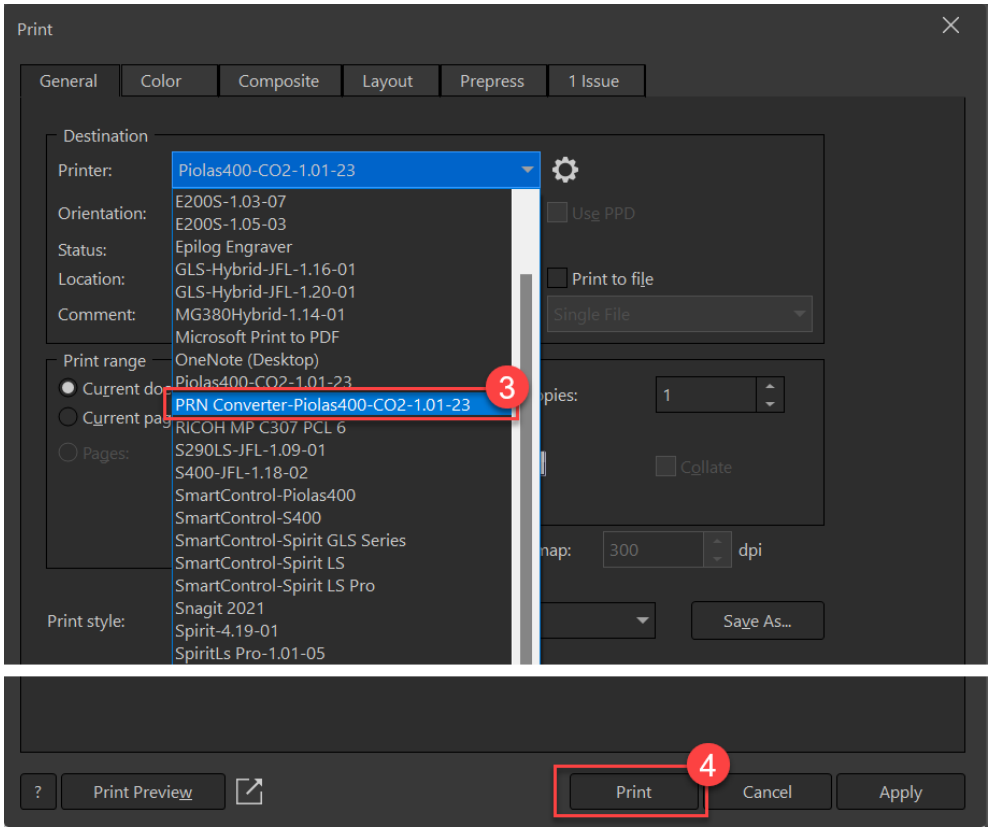

NOTE

This operation is only for USB storage use. If the file will be used for SmartVISION Elite CCD, please choose “SmartCONTROL-Piolas280/400/400SE” to convert to PRN format.

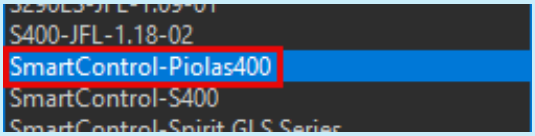

Step 4. Ensure the file format is set to *.prn



Step 5. Select the save folder and define file name, then click “Save” to convert the file to PRN format.



To ensure that the file name can be displayed on the touch panel without any issues, please follow the rule below when naming the PRN file.

- File names should only include English letters and numbers.

O	ABCDEFGHIJKLMNOPQRSTUVWXYZ abcdefghijklmnopqrstuvwxyz 0 1 2 3 4 5 6 7 8 9
X	! @ # $ % ^ & * ( ) _ + . { } | ” : ? > <


- Only 8 characters of the file name can be displayed on the touch screen; longer file names will be automatically truncated.

File Name	Displayed on Touch Panel
GCC_LOGO_Engraving.PRN	GCC_LO-1.PRN
Animal.PRN	Animal.PRN

- File names should not contain spaces.

O	GCC_LOGO_Engraving.PRN
X	GCC LOGO Engraving.PRN

Step 6. Copy/move files to the USB flash drive.

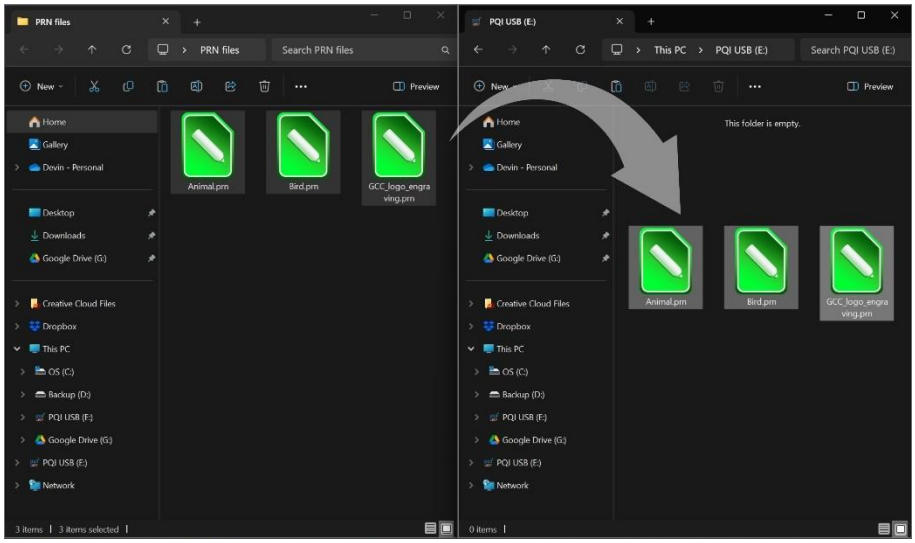


Step 7. Insert USB flash drive to the USB Storage port of GCC laser engravers.




NOTE

USB storage function only supported for the PRN format.


Step 8. Click the "Import file from USB Storage" button on the Home page of the touch panel. The machine will read the USB and display the file list.

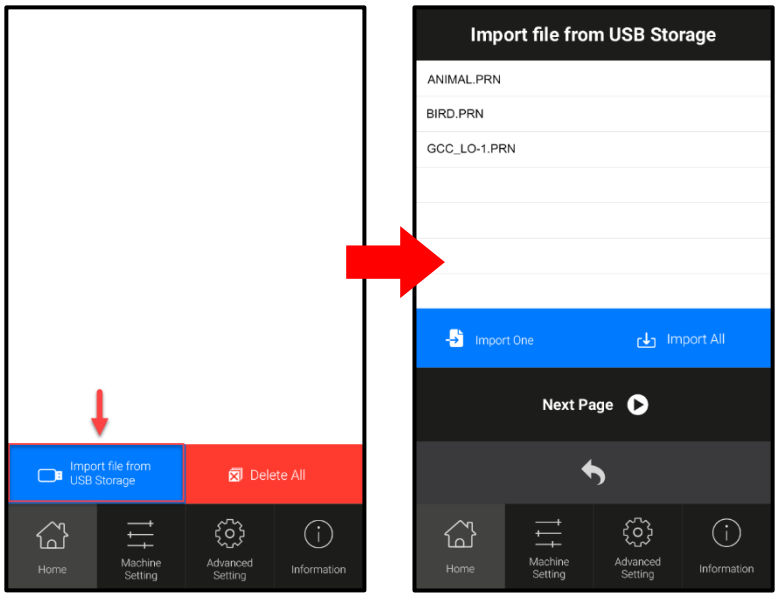


Step 9. Choose a file and press the "Import One" button on the touch panel to transmit the file to the laser engraver. Alternatively, you can press the "Import All" button to transmit all PRN files from the existing folder.

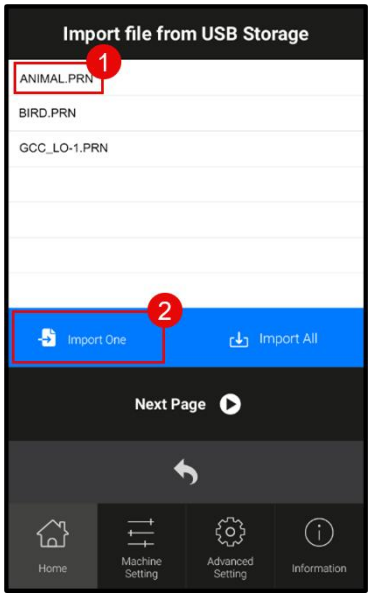

Step 10. The machine will show a message during files transmit.

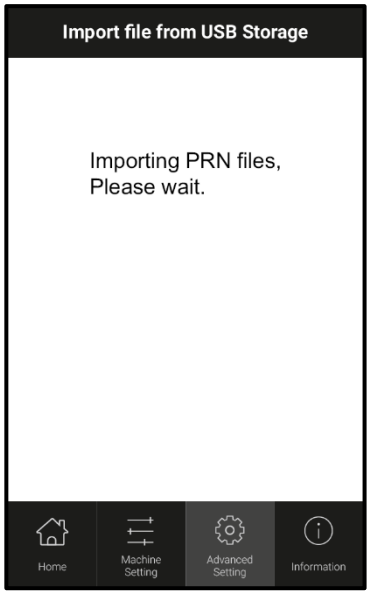

Step 11. After transmission, the file will be shown on the touch panel.

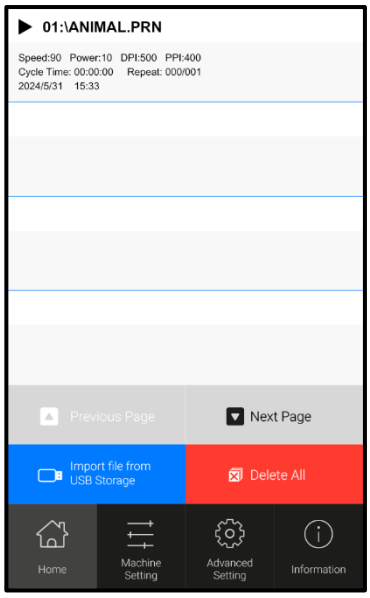

Step 12. Press START button on control panel to begin laser jobs.

4.1.4 Local time synchronization

The touch panel of the Piolas series can display the date and time when it receives files. To ensure that the date and time are displayed correctly, please follow the instructions below to complete the setup.


NOTE

The battery cannot be shipped due to the shipping policy. Please purchase a CR2032 mercury battery at your nearest store.

Step 1. Turn off the machine.

Step 2. Remove the two screws to open the right-side panel of the Piolas.




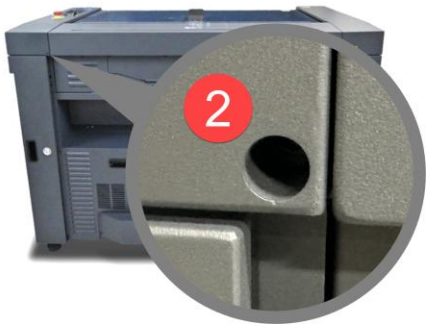



Step 3. After opening the right-side panel, you will see a sticker located on the cover of the touch panel. Please peel off the sticker and install the CR2032 mercury battery.



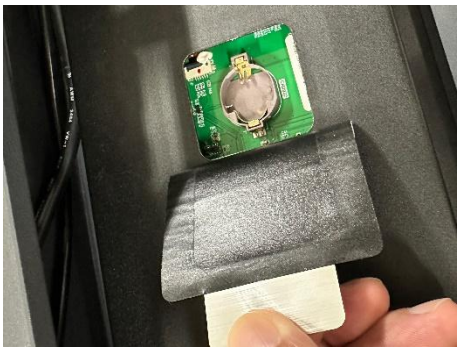




Step 4. Connect the USB cable between PC/laptop and the machine, then turn on the machine.

Step 5. Follow the link below to download the **GCC Time Sync Tool** from the download area of GCC World. You can find the tool under the software list.

Piolas Series | GCC: Laser Machines Leader Since 1989




Step 6. Unzip and run the tool. The GCC RTC Sync Tool window will appear, and the date and time of the PC/laptop will be displayed in PC Time.

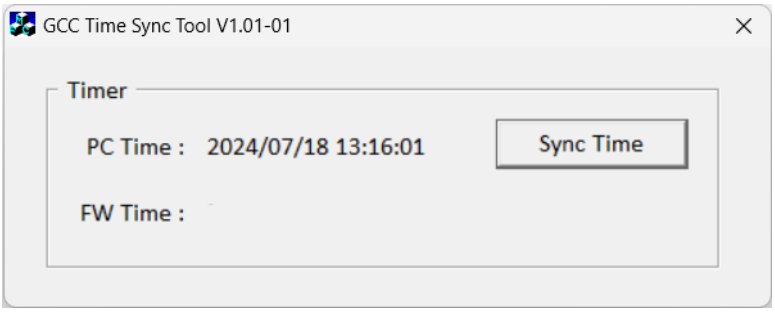


NOTE

1. If you see a warning message saying “No GCC Device Found” and “Please connect Device!!!”, please check the USB connection.

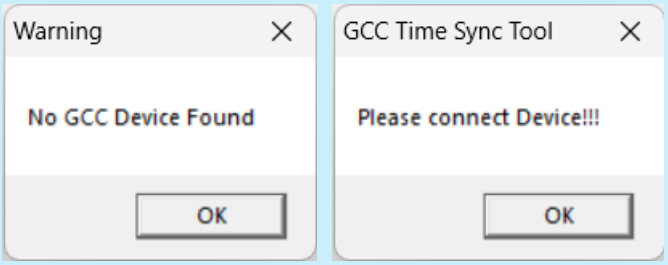


2. If there is display the date and time on FW time, which means the machine has been synced before. You can re-sync if the PC time and FW time are not matched.

Step 7. Click the “Sync Time” button to sync the machine's date and time with your PC's time.

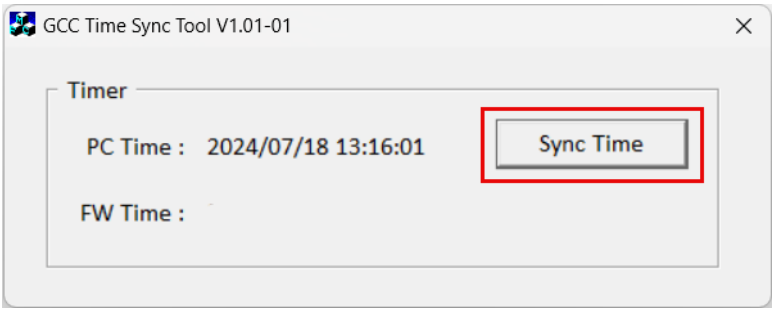

Step 8. The PC Time and FW Time will now be the same, indicating that the setting is completed.

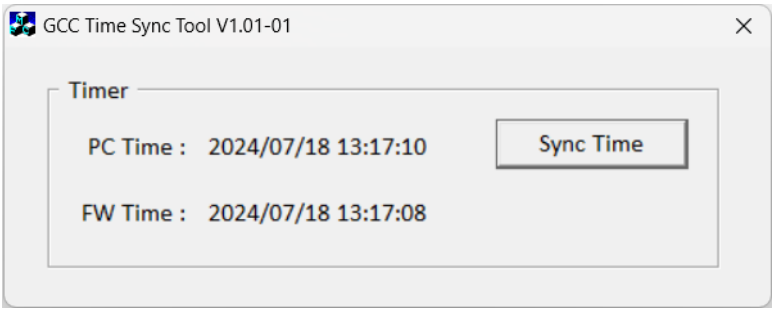

4.2 Graphics Software Setup

4.2.1 Recommended Computer Configuration


The LaserPro Piolas series operates under Windows operating systems and is designed to work on a computer that meets the following minimum requirements.

Operating System	Windows 11 or Windows 10 (version 21H2 or later), 64-bit, with the latest updates and service packs.
Processor	Multicore Intel processor (with 64-bit support) with SSE 4.2 or later or AMD Athlon 64 processor with SSE 4.2 or later.
RAM	8 GB (16 GB recommended)
Hard Disk	1 GB of available hard-disk space for installation (SSD recommended)
Monitor Resolution	1024 x 768 display (1920 x 1080 recommended)

4.2.2 Installation of the GCC LaserPro Printer Driver

Please refer to the following steps to install the GCC LaserPro printer driver on your computer.

Step 1. Visit www.GCCWorld.com, navigate to Support → Download Area → Laser Engraver, and download Piolas 280 / 400 / 400SE printer driver that corresponds to your model..

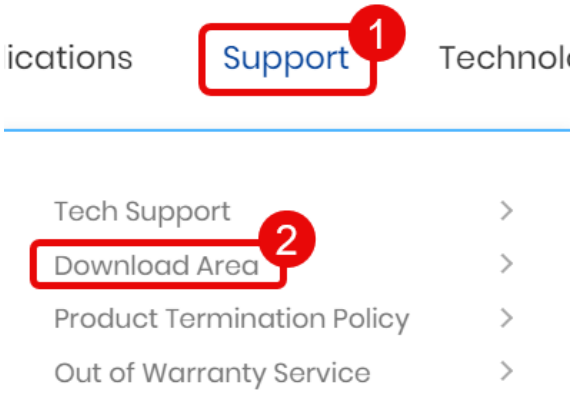





Step 2. Double-click the downloaded file to install the printer driver.




Step 3. During installation, the “Port Configure” window will appear. Select your preferred connection method and click the “OK” button to continue.

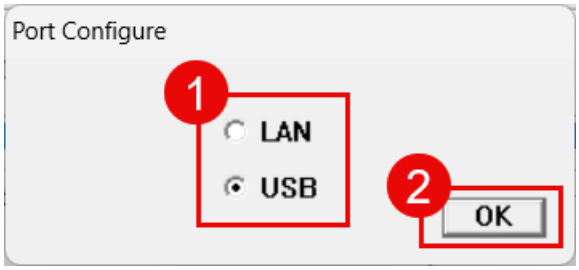


Step 4. Next, the “Printer Name” window will appear. Enter a specific name to help identify the machine easily, or simply click “OK” to proceed.

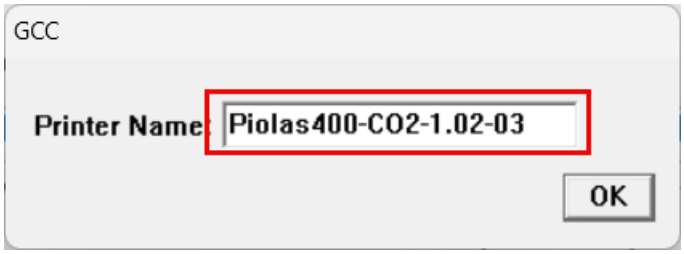

Step 5. The GCC plug-in installation will then start. Click the “Install” button to continue.

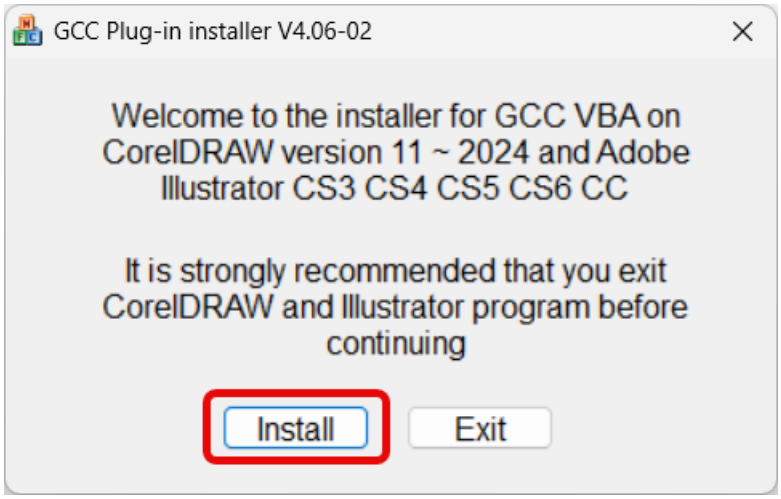

Step 6. The installer will automatically detect the versions of CorelDRAW and Illustrator on your computer and install the appropriate GCC plug-in. Click “OK” to complete the installation.

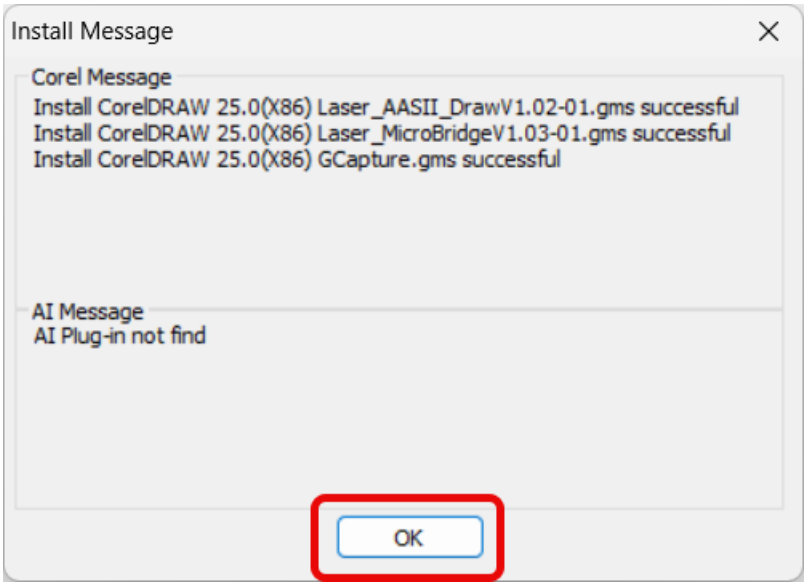


4.3.3 Using Adobe’s AP with GCC LaserPro Machine


The Adobe’s AP (e.g. Illustrator, Photoshop or Acrobat reader) processes files via its Advanced Printing Features; users should firstly deselect Enable Advance Printing Features; otherwise the machine is unable to recognize or read general files when uploaded.

- Deselect “Enable Advance Printing Features”


  1) Click to select → Control Panel → Devices and Printers

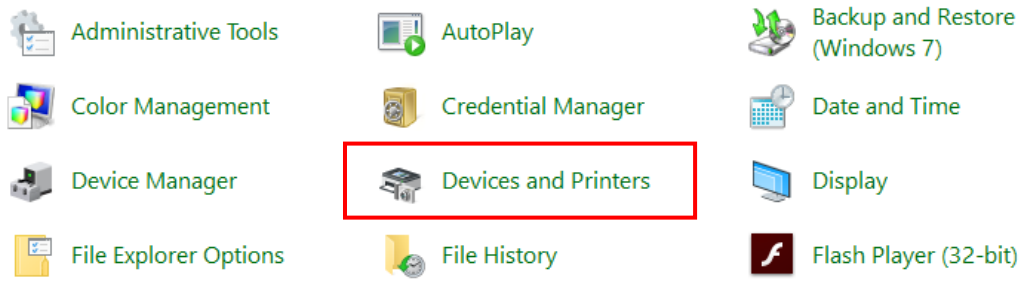

2) Select your printer (for example, Spirit), right-click your mouse and choose Properties to enter Spirit Properties setup

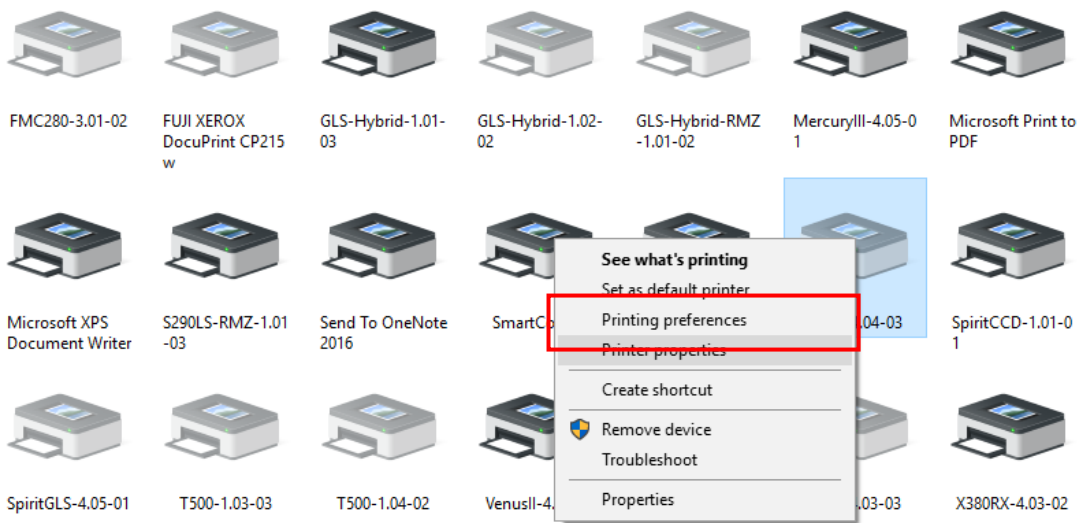


3) Then click the Advanced tab, then deselect Enable Advanced Printing Features, now all files can be recognized and uploaded.

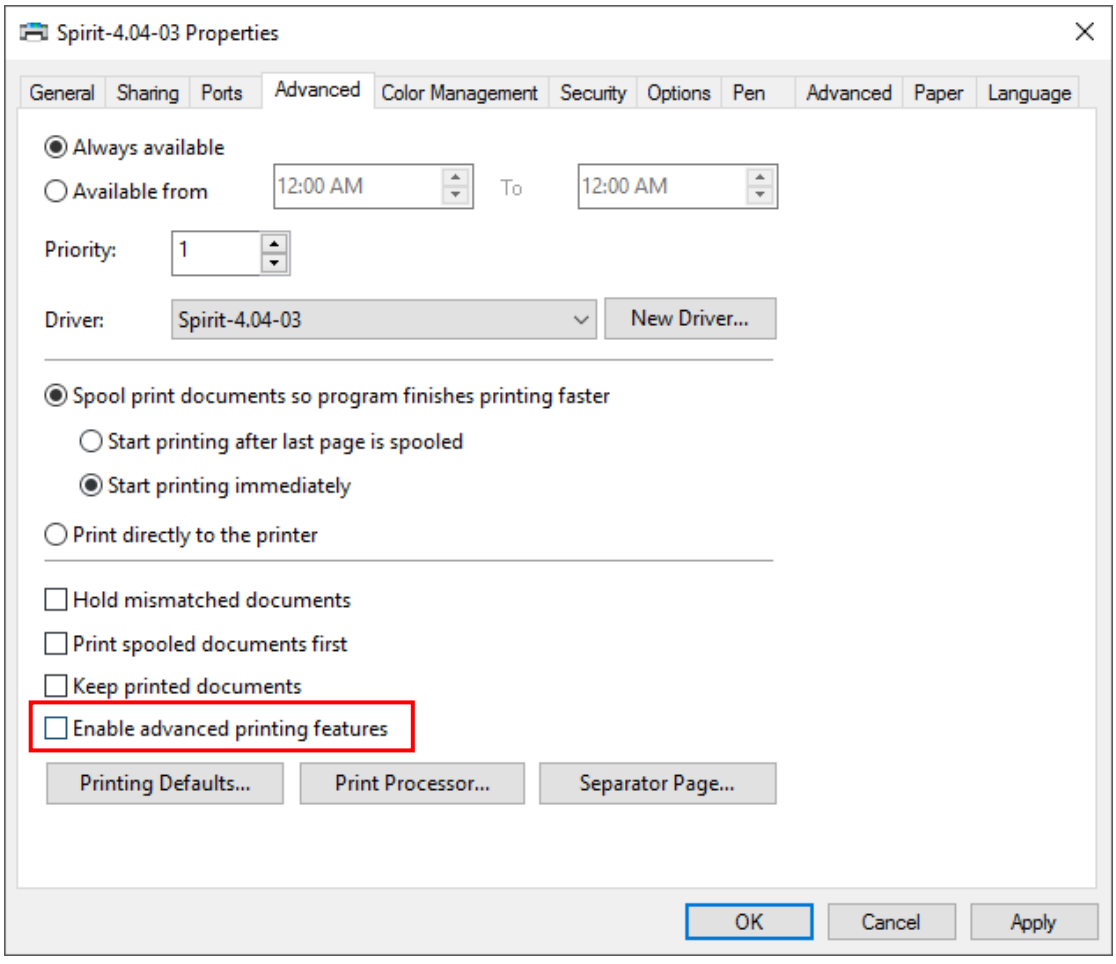


- File Transfer


1) Select your working object, and then at the upper toolbar please choose File → Print.

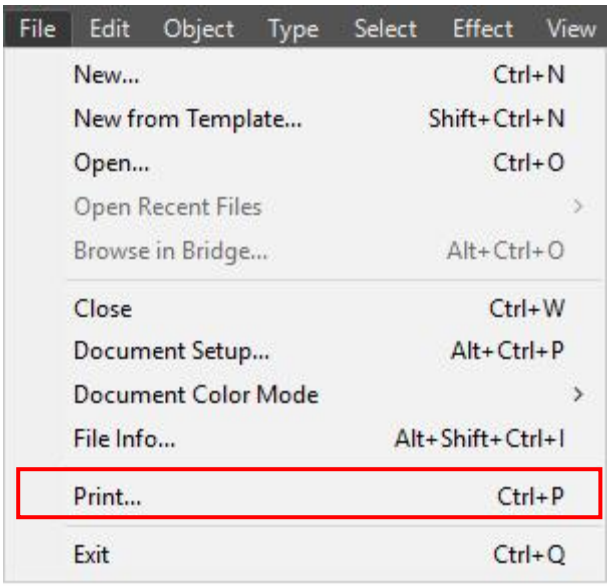


2) At the print setup screen, at Print Preset please select Custom, and choose your printer (e.g. Spirit)

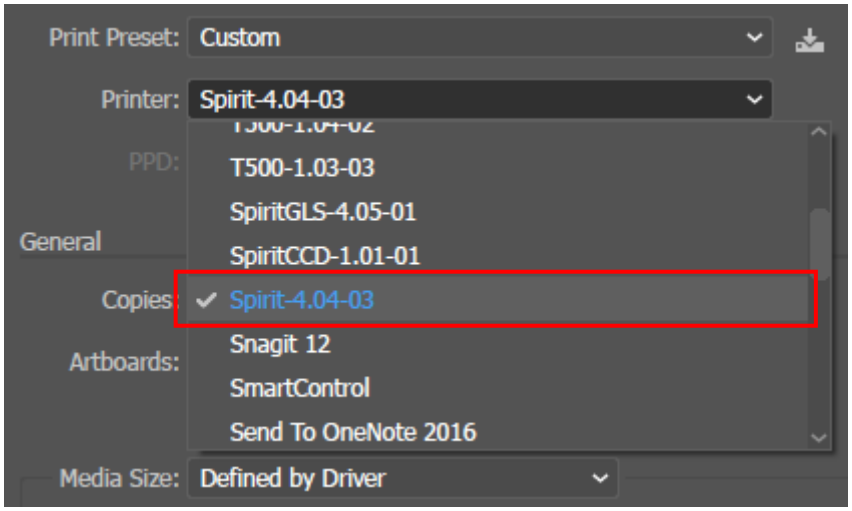


3) Then click on the lower left tab of Setup to enter Preferences settings.

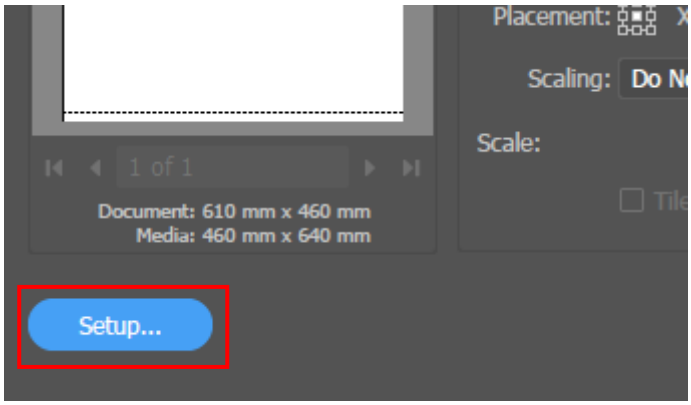

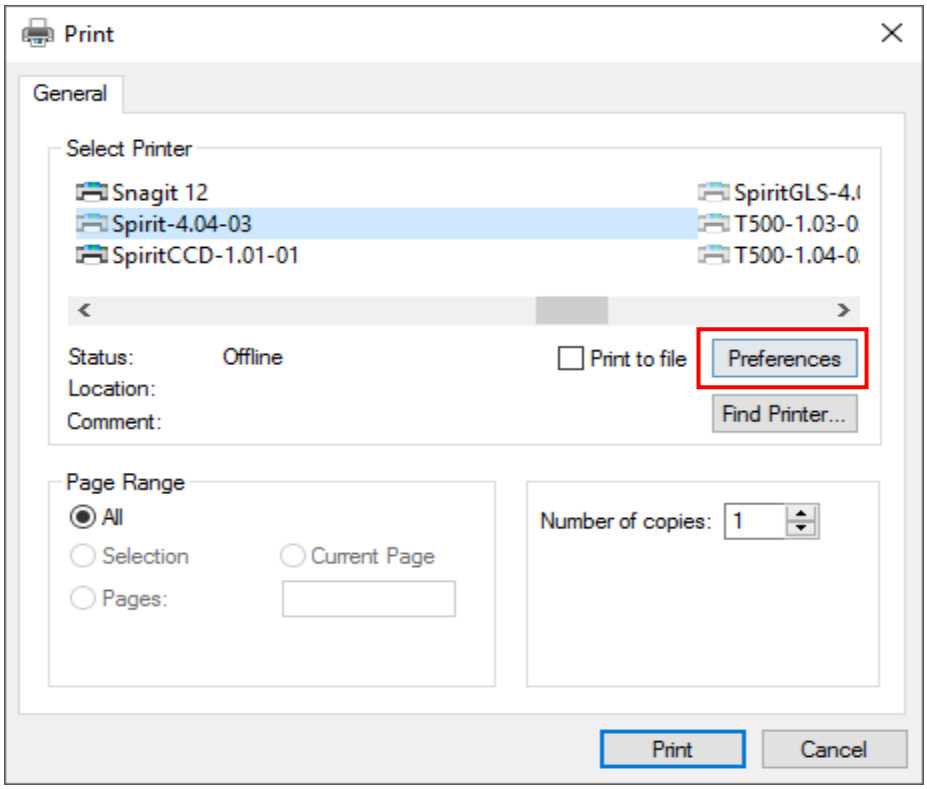


4) After all preferences are set, click Print to send file to the machine for print out.

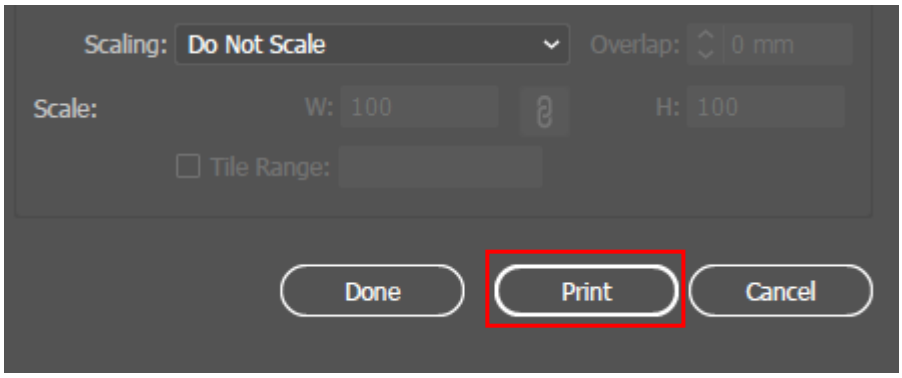


4.4.4 Using Autodesk Inventor with GCC LaserPro Machine


1. Start drawing.

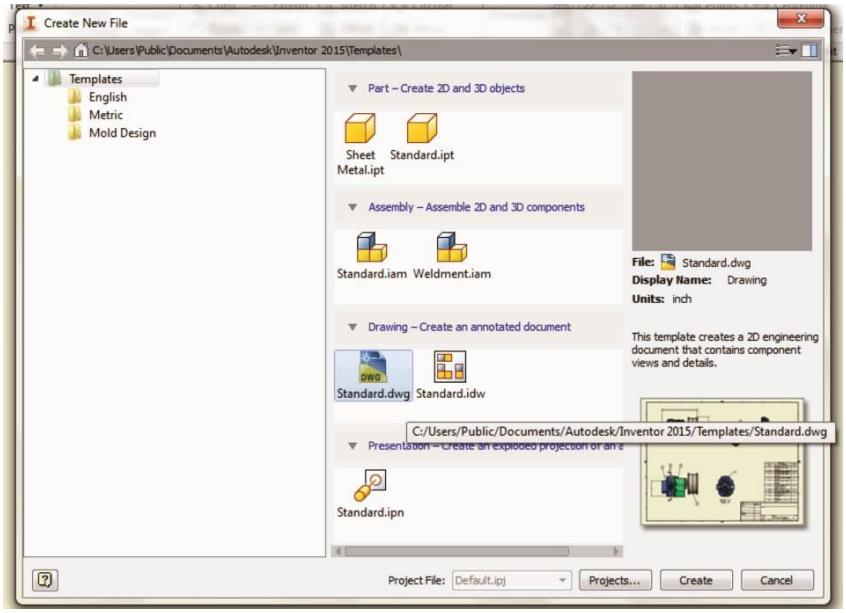

2. Delete border and title block by right clicking on sheet1 and selecting delete.

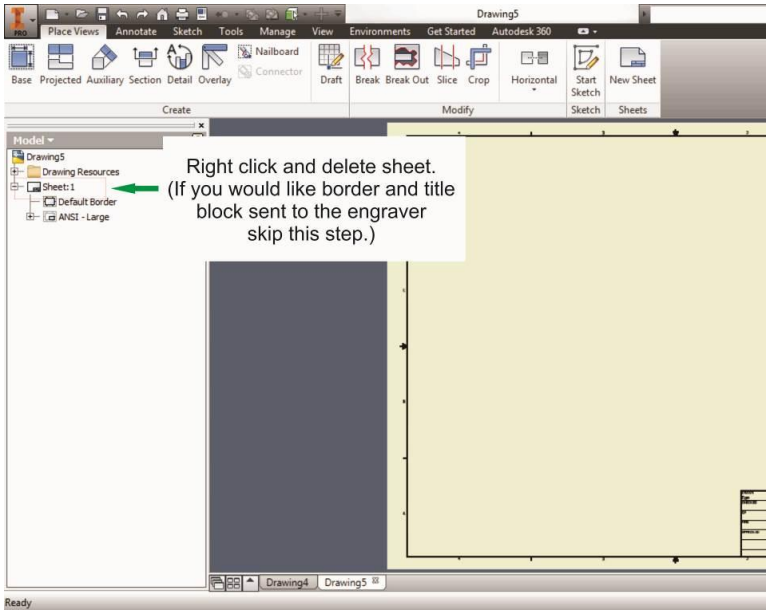


3. Set sheet size to match working area of engraver. Engraver working area can be found on the paper tab of the windows driver.

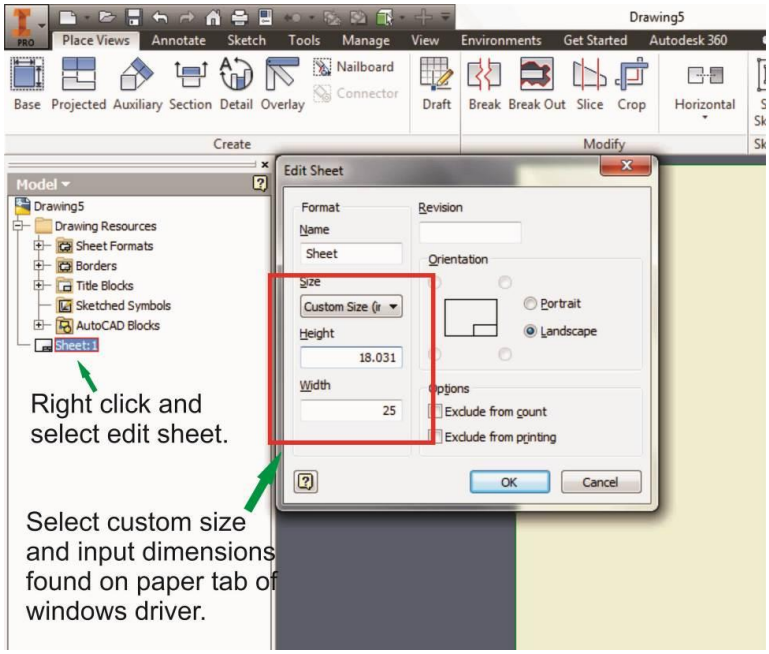


4. Start sketch.

5. Engraving
   a. Finish sketch.
   b. Right click on sketch and select properties.
   c. Line Type: By Layer
   d. Line Weight: By Layer
   e. Set color to match one of the 16 colors available in the pen tab of the windows driver.

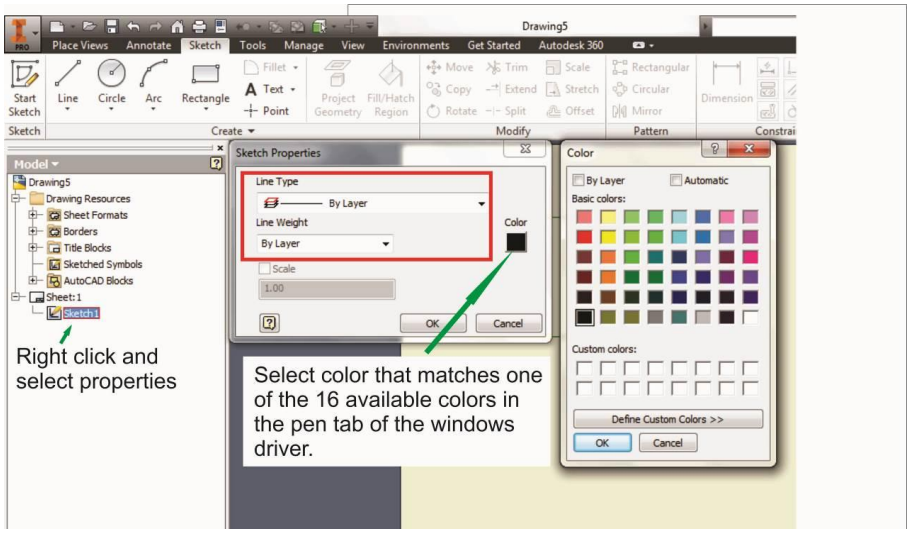

6. Cutting
    a. Finish sketch.
    b. Right click on sketch and select properties.
    c. Line Type: Continuous
    d. Line Weight: .001 in.
    e. Set color to match one of the 16 colors available in the pen tab of the windows driver.

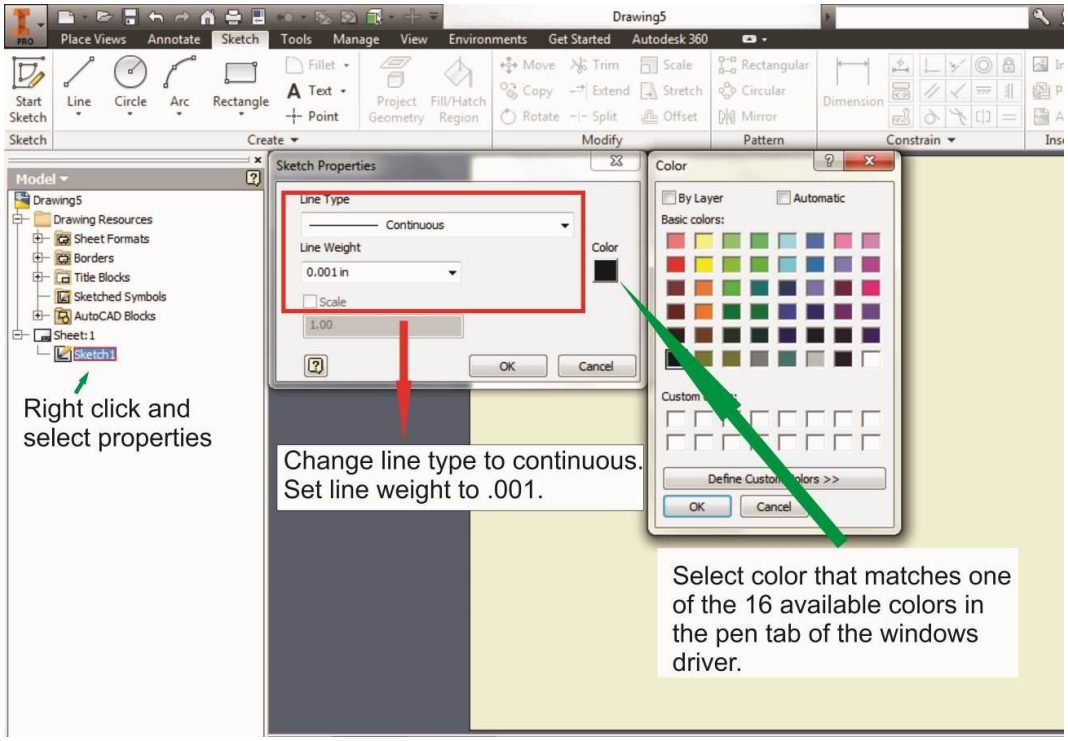

NOTE

All objects created in one particular sketch will have the same properties meaning all will engrave or all will cut. If you would like to engrave and cut in the same job you will need at least two sketches, one with all the engravings and another with all the cuts, to do so properly.

4.4.5 Using the GCC SmartTOOL plug-in with GCC Machine

The GCC SmartTOOL™ is a unique software extension for Corel Draw that can drastically reduce your process times. This makes standard processes like a child’s play and saves an infinite amount of valuable time.

GCC SmartTOOL unique feature list:

- Quick setup of laser machine layout
- One-click creation of CCD registration marks
- Generate label templates
- Smart copy functionality
- Import Excel data
- Automatic object sorting
- Image optimization for laser output
- Stamp tool
- Rhinestone tool

For more information, please refer to the following link:

Introduction Video:

https://youtu.be/lgs6QHRgyPQ?si=twZrx4uOAccAmsHk

User Manual

gccworld.com/data/download/file/SmartTOOL-User-Manual.pdf

Chapter 5
Setup and Installation

- Using Hardware
- Using the Touch Panel
- The LaserPro Printer Driver

Once you have installed the LaserPro USB Driver (for USB connection) and the LaserPro Printer Driver, and have connected your LaserPro Piolas machine to the computer, take some time to familiarize yourself with both the Piolas Series Touch Screen and the LaserPro Printer Driver.

The Printer Driver is where you configure specific laser parameters for your jobs, while the Touch Screen allows you to set repeat counts, manage file order, perform auto or manual focusing, and more.

5.1 Using the Hardware

5.1.1 Front Door



The front door features a new design, allowing users to open and close it with ease.

Open the door: Press the door to the bottom.

Close the door: Press the door again.

NOTE

Please press the center of the door to ensure smooth operation.



5.1.2 Emergency Stop



Press the button to stop the laser in an emergency. To reset this button, rotate it to the direction of an arrow.

5.1.3 Quick Boot Button



The button makes the user to turn ON/OFF machine with ease.

5.1.4 Laser Key Switch




Turn the key-switch to the “ON” position BEFORE powering on the machine. If the key-switch is turned to the “OFF” position, the laser will be disabled meaning that the laser will not fire although the XY motion system will still move. The laser firing will need 8-10 seconds to warm up if turning to off, and turn on later, therefore, please wait 10 seconds before pressing STRART button for laser work.

5.1.5 USB Storage



The USB storage port allows you to transmit data from a USB flash drive. Please refer to Chapter 4.1.3 for more details on operations.

5.2.1 Touch Panel Navigation Chart

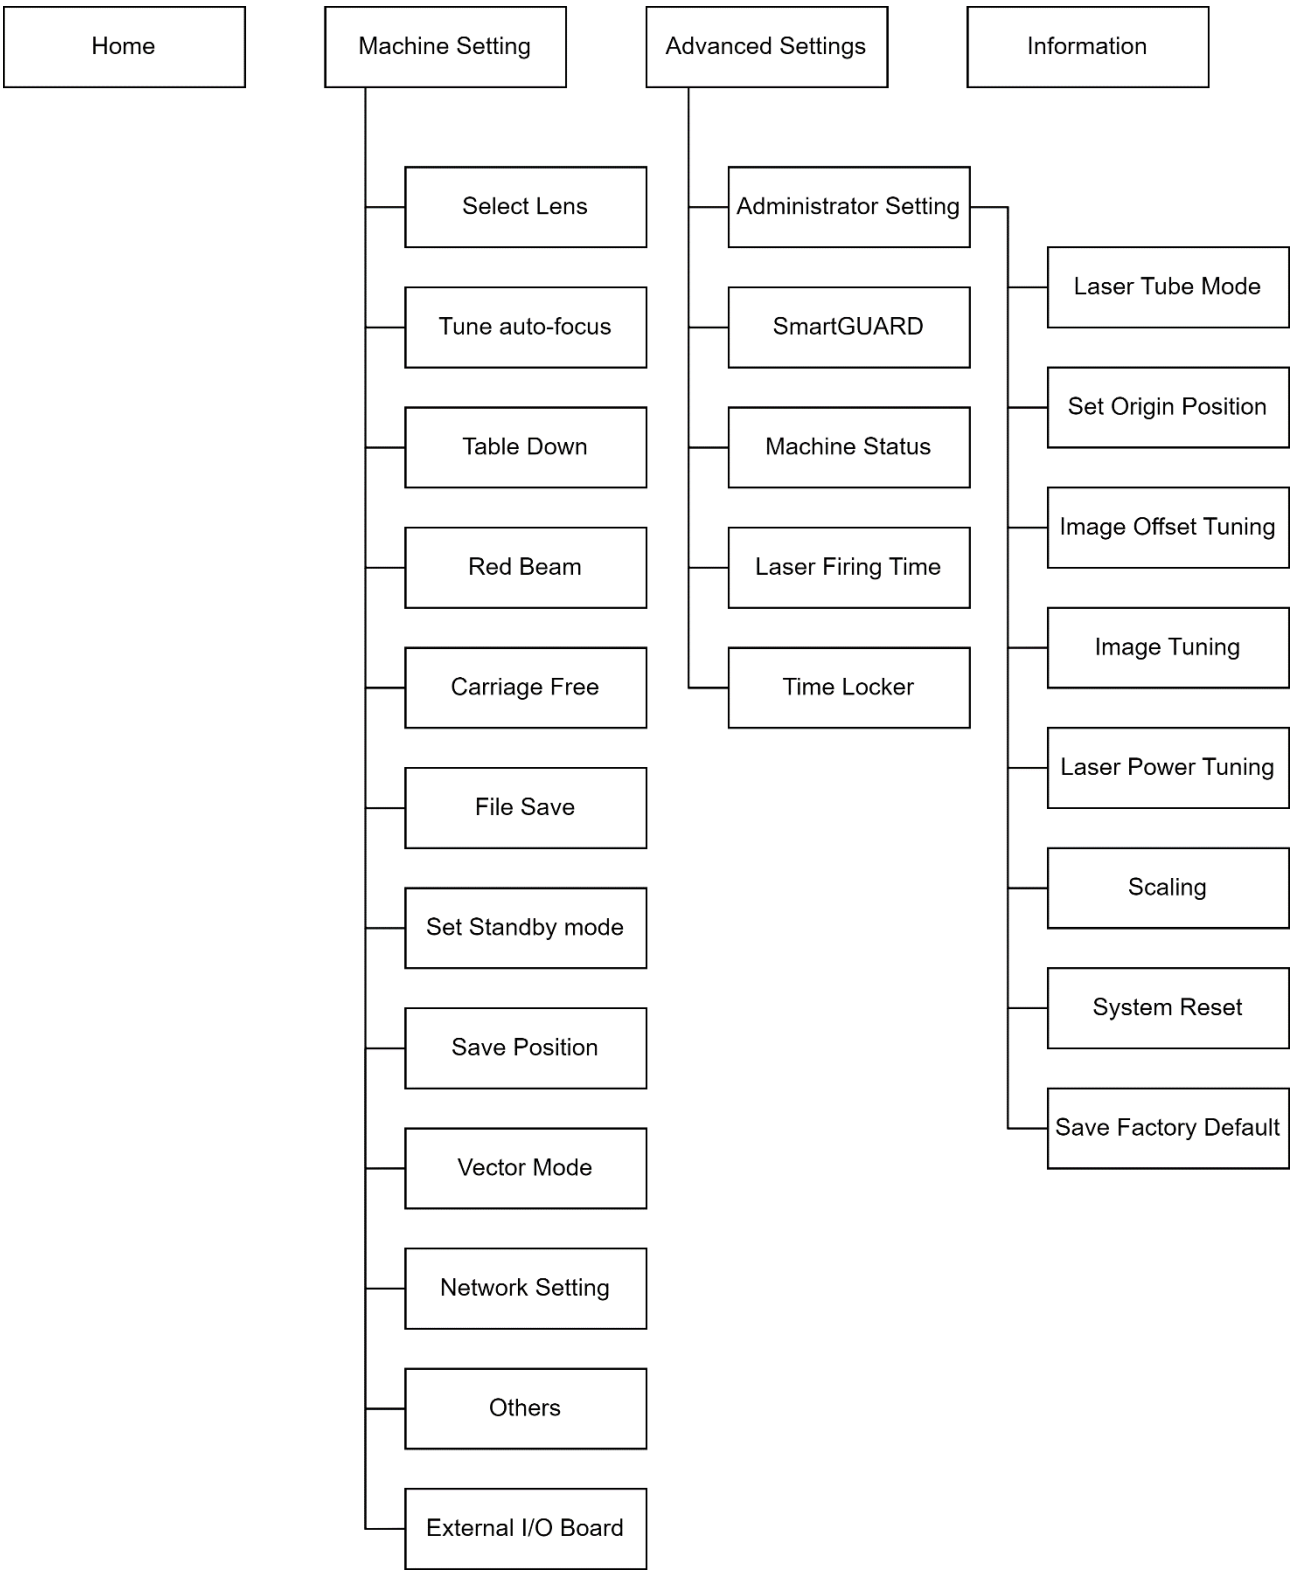


5.1.6 LED Light Switch



Quickly turn ON/OFF the LED light.

5.1.7 Touch Panel

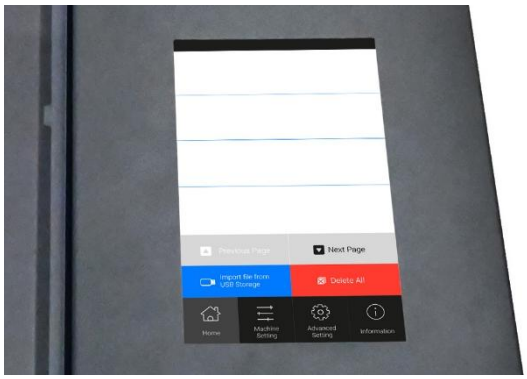

The 7” touch panel enables the user to manage files, adjust machine settings, and more.

5.1.8 Control Panel




The new control panel provides physical button which allows the user to control the machine with a good tactile feedback and operational accuracy.

The control panel can operate the machine as following functions:

- ✓ START/STOP button – Start or stop the job process.
- ✓ PAUSE/RESUME button – Pause or resume the job process.

- ✓ Recall – Make the lens carriage go back to home or specific position with ease.
- ✓ Standby – Quickly enter the standby mode.
- ✓ Arrow keys – Move the lens carriage easily.
- ✓ Z-axis UP and DOWN – Adjust the Z-axis up and down.
- ✓ Auto Focus – One button to set the correct focus distance.

5.1.9 Status Indicator Light

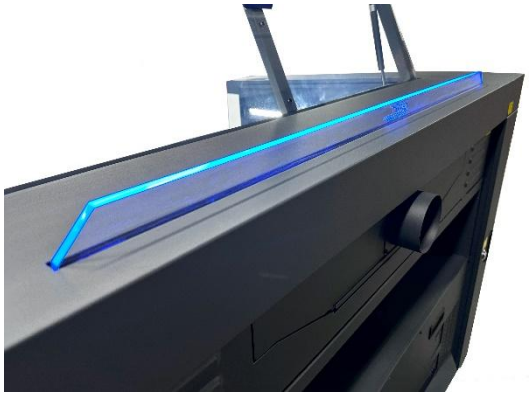

The status indicator light helps the user to identify the status of the machine.

Please refer to the following chart to know all the status:

Light Color	Status	Light Behavior
	Initializing	The white light is fading in and out
	Laser processing	The green light stays on
	Idle	The blue light stays on
	Door Open	The orange light stays on
	Error	The red light flickers

5.1.10 SmartEYES CCD



SmartEYES™ CCD on the top lid enables capturing the entire working area of the machine, making positioning easy. Please refer to the following instructions for operation.


NOTE

Before using SmartEYES CCD, please ensure that printer driver and SmartCONTROL program have been installed on your computer/laptop.

Import the calibration file of SmartEYES into your computer/laptop


1) Connect the computer/laptop to the machine.


2) Open SmartCONTROL program, and go to <Vision> → <Configure SmartEYES>, then the SmartEYES setting window will appear.

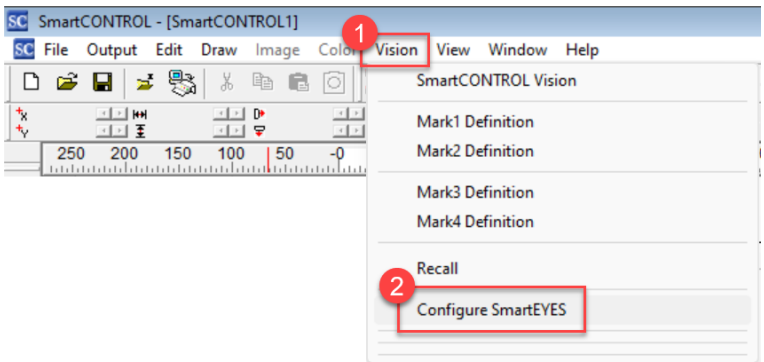


NOTE

If you found following messages, please verify the connection.

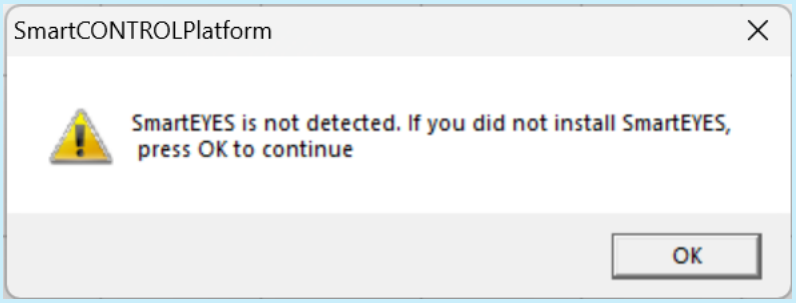


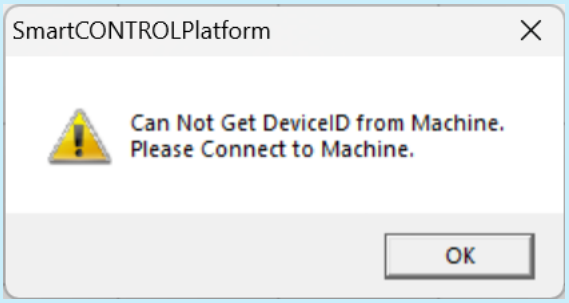


3) Click “Load SmartEYES calibration file from machine” to import the calibration file into your computer/laptop.

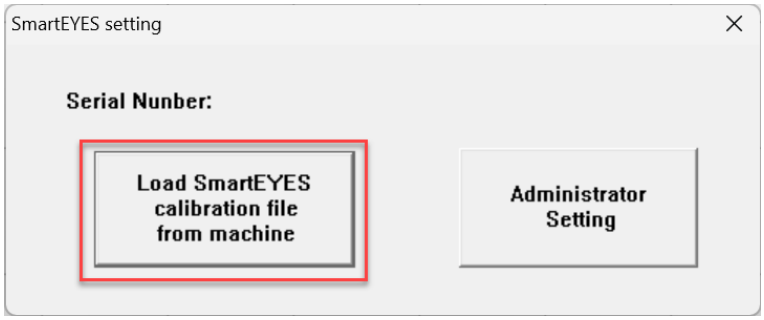

4) The SmartCONTROL will display a message to remind you that the calibration file will load to your computer/laptop. Please click OK to continue.

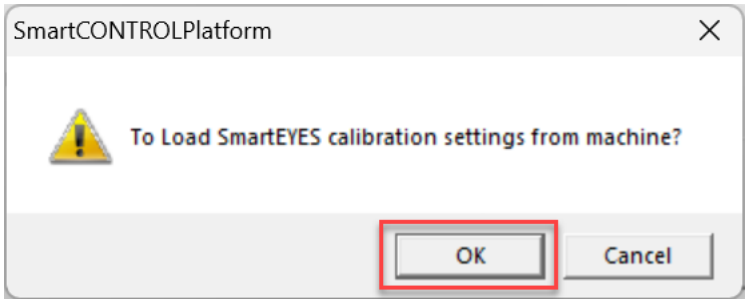


5) After loading the calibration file, SmartCONTROL will display a load calibration complete message. Click OK to close the window and now you can close SmartCONTROL.

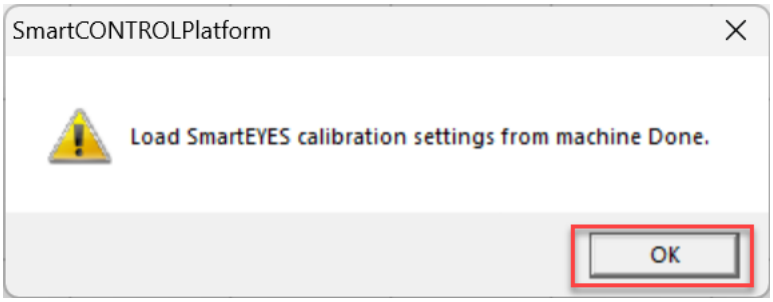


CorelDRAW Setting


1) Run CorelDRAW and find the GCC plug-in from toolbars. It's located in the up-right corner of CorelDRAW.

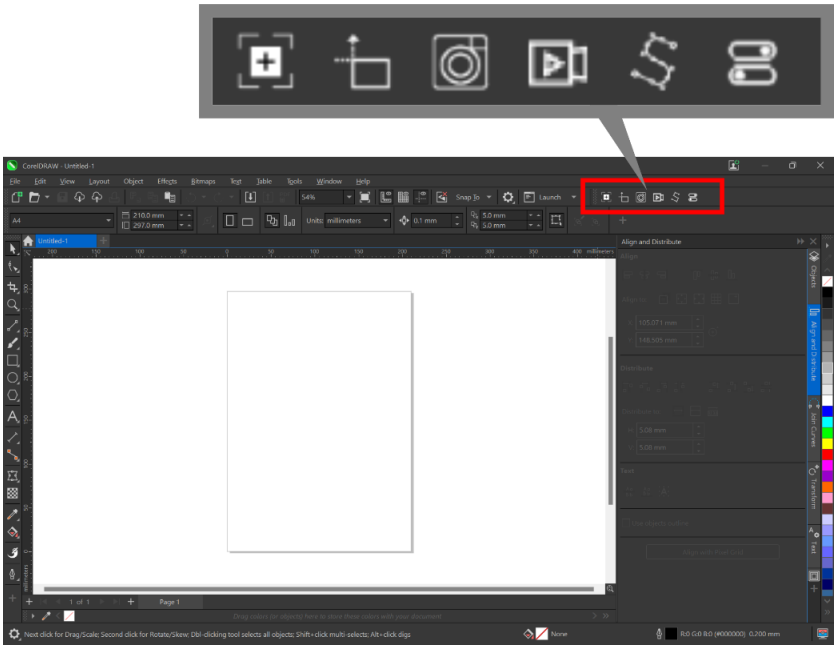

2) Click  (Camera Model) button, and the Model Setting window will appear. Select "Piolas 280 / 400 / 400SE" from the drop-down menu of model names and click "OK" to complete the setting.

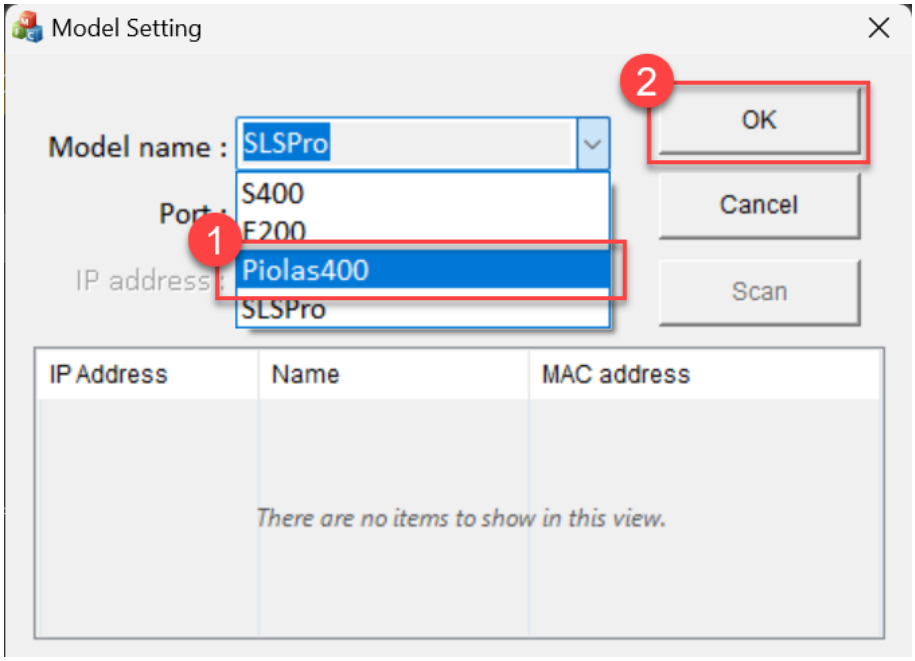


3) Click  (Set SmartEYES Path) button and assign the calibration file located at C:\SmartCONTROL\V2.01-35 (the path may vary depending on the installed version). Then click "OK" to finish the setting.

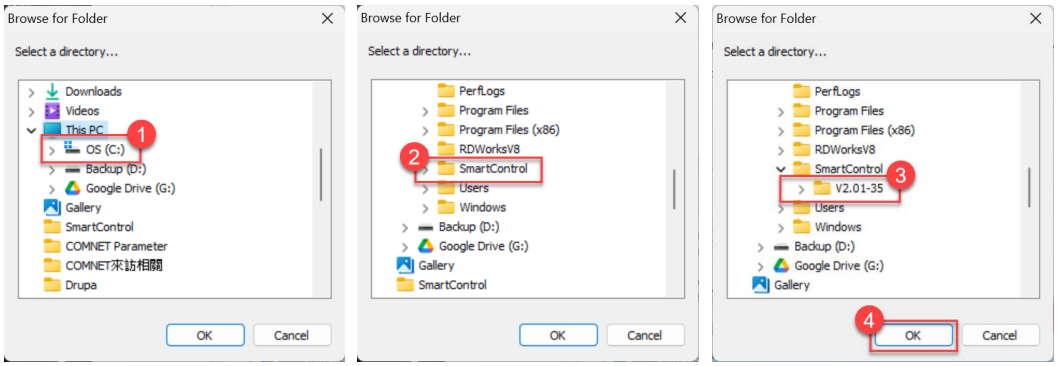


Adobe Setting

1) Run Adobe Illustrator and go to <File> → <GCC SmartEYES> → <Set SmartEYES Path> from the menu bar.

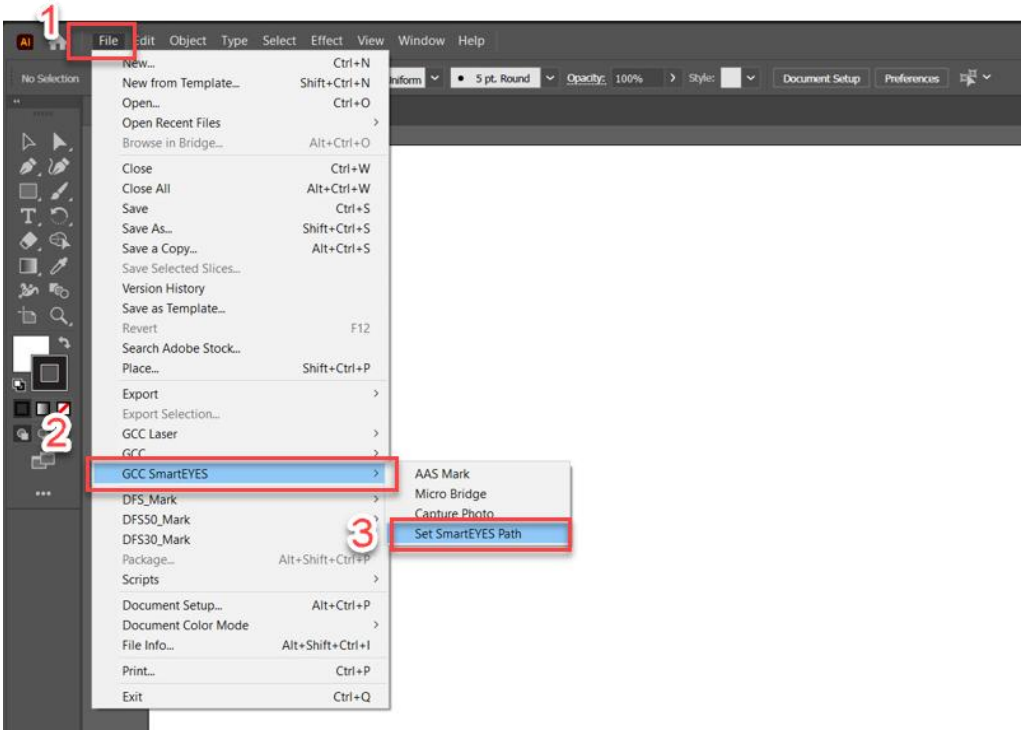

2) Assign the calibration file located at C:\SmartCONTROL\V2.01-35 (the path may vary depending on the installed version). Then click "OK" to finish the setting.

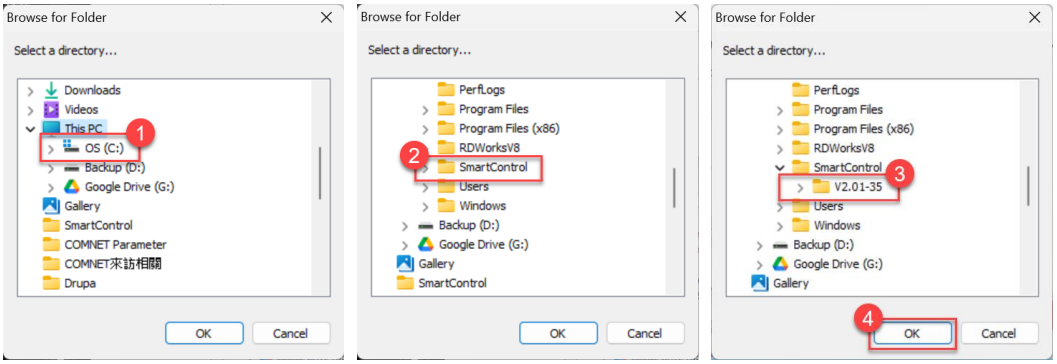


Operation (Using CorelDRAW as an Example)

1) Open the top lid of the Piolas machine.




2) Place an object on the working table of the machine.

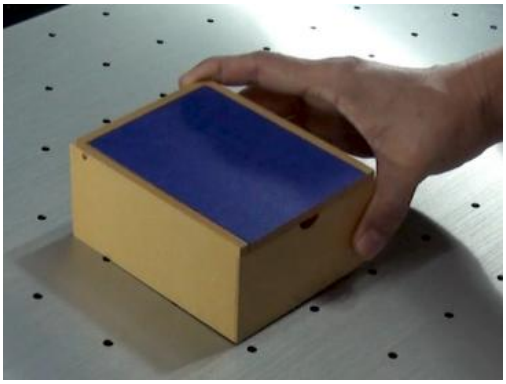

3) Click  (Capture photo) button to capture table.

4) Move artwork to a position that you want to process.

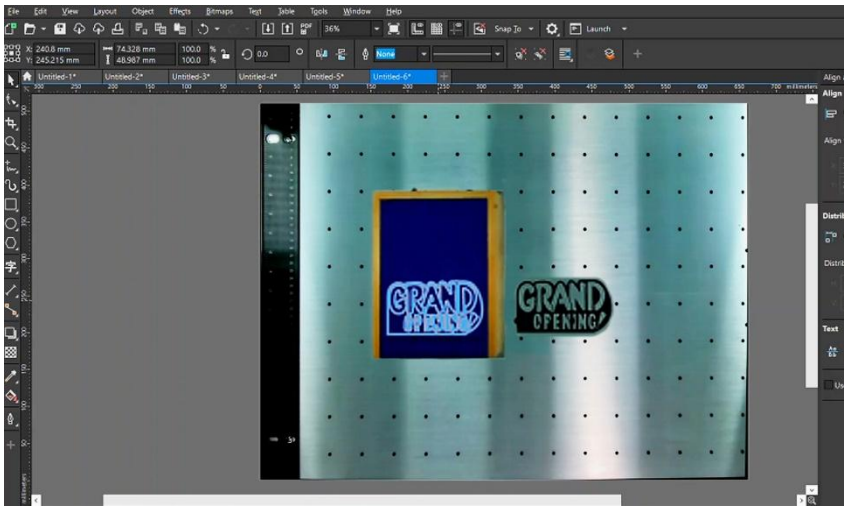

5) Engraving job is finished.



5.1.11 Live-View Camera



The Live-View Camera enables you to monitor the machine status during laser processing. It also helps teachers easily instruct students on how to use the laser in the classroom.


Operation (Using CorelDRAW as an example):

1) Please refer to chapter 5.1.9 to complete the setting for **Import the calibration file of SmartEYES into your computer/laptop** and **CorelDRAW/Adobe Illustrator Setting.**

2) Close the top lid when you have finished all the setup.



3) Run CorelDRAW and find the GCC plug-in from toolbars. It's located in the upper-right corner of CorelDRAW.

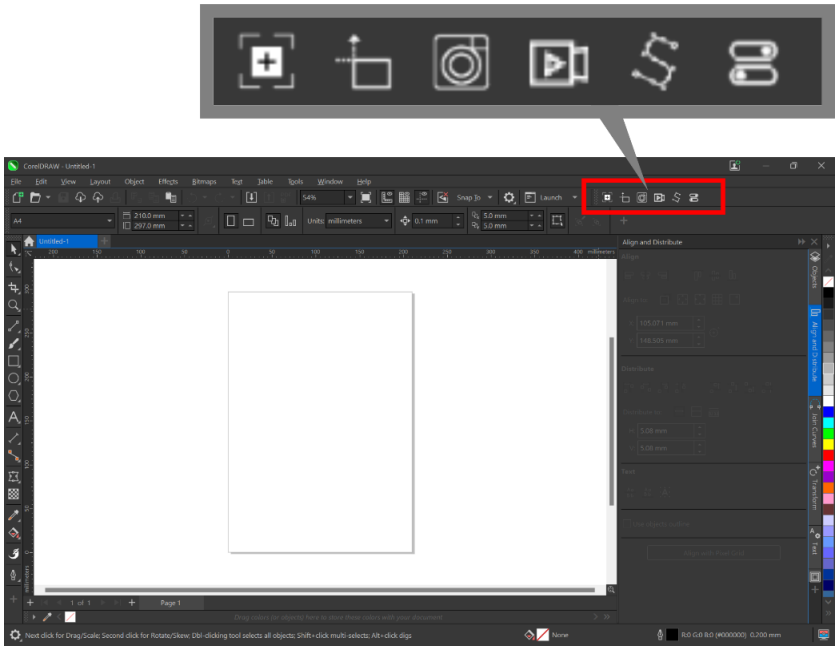

4) Click  (Real Time Video) button, and a new window for SmartEYS will appear.

5) You can now see the real time video of the working table in your system.

5.1.12 SmartAIR Fine Nozzle

The Piolas series equipped with two SmartAIR nozzle. The standard nozzle has been installed on the lens carriage and you can find the Fine nozzle in the accessory box.

The main difference between Standard nozzle and Fine nozzle is below chart:



Nozzle Type	Application
Standard	General application
Fine	The air will be more focused, especially for processing materials such as paper and fabric.

Please refer to Chapter 2.2.2 to check how to change the SmartAIR nozzle.


5.2 Using the Touch Panel

The touch panel on the LaserPro Piolas series provides easy access to all the manual controls needed for cutting and engraving. The 7-inch touch panel makes setting up the machine simple.

The bottom of the touch panel always includes four buttons: Home, Machine Settings, Advanced Settings, and Information. Please refer to the following chart for more details.


	Home – Manage files, load file from the USB flash, etc.
	Machine Settings – Set various machine functions.
	Advanced Settings – Set extra functions.
	Information – Check the machine information, including two barcodes for the user to go to GCC website or read user's manual quickly.

5.2.2 Home Page

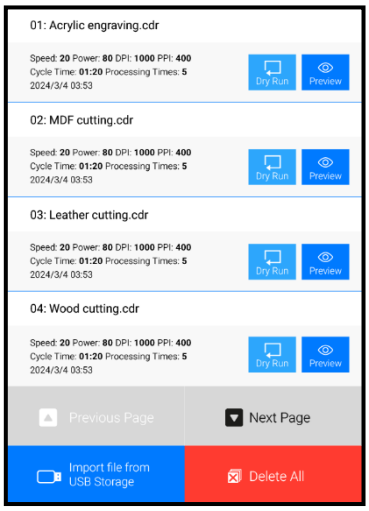


The Home Page allows you to manage files and import files from a USB flash drive.


There are three statuses displayed on the Home Page

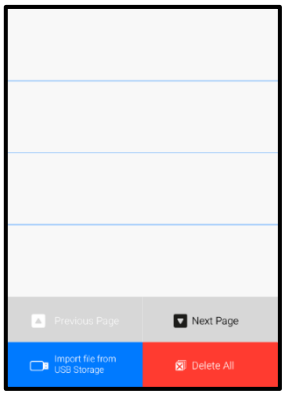

No file in the machine.

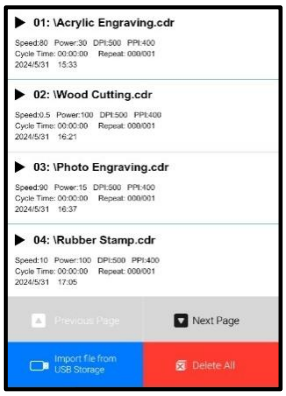


Files have been sent to the machine. Each page can display up to 4 files. Click the "Previous Page" or "Next Page" button to switch between pages in the list.

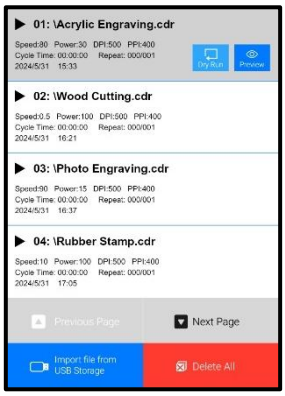

When the user selected a file. The background of the file will be highlight to dark gray. The Dry Run and Preview icon will appear.

Operation:

1) After sending file to the machine, please click a file on touch panel. The background of the file will be highlighted to dark gray, and the Dry Run and Preview icon will appear.
2) Clicking the Dry Run (Dry Run) button will cause the carriage to run a rectangle, allowing the user to visualize the size and position required for the job. This function can help the user to prepare a correct material size before job processing.
3) Click the Preview (Preview) button will enter the Preview Page, please refer to chapter 5.2.2.2 for more information.
4) After selecting a file, please press the “START/STOP” button on the control panel to process the job.

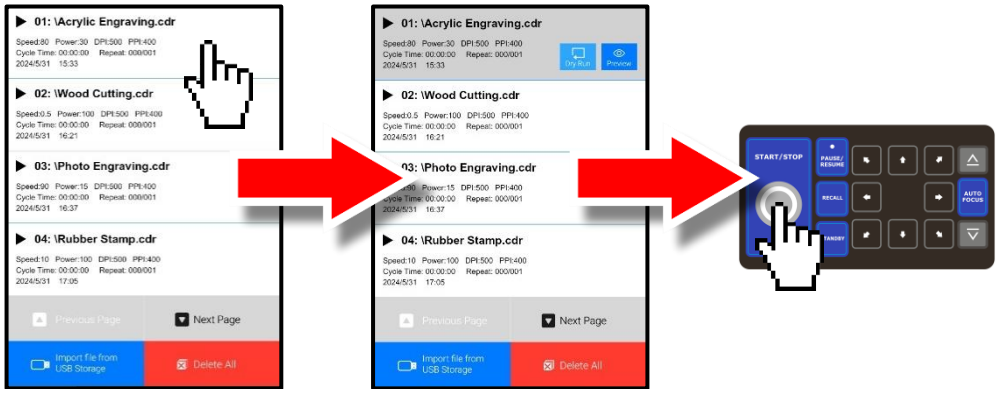


5) If you want to import files from USB storage, please refer to chapter 4.1.3 for more information.

Page configuration:


Previous Page Next Page	Previous Page and Next Page – Switch the page of the file list
Import file from USB Storage	Import File from USB Storage – Clicking this will take you to the “USB Storage” page. Please refer to Chapter 4.1.3 for more information.
Delete All	This button deletes all files from the machine.

5.2.2.1 Carriage Movement Page

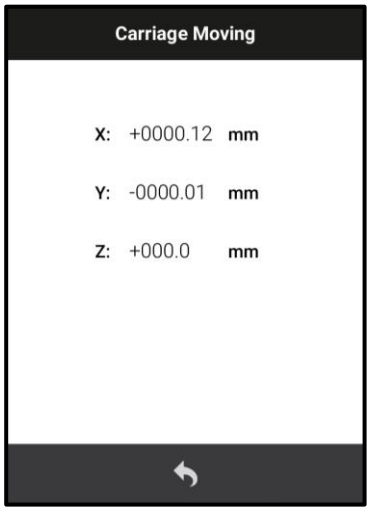


Press any arrow key on the control panel in the Home page to enter the Carriage Movement page. The coordinates of X, Y, and Z will be shown on this page. The coordinates will be updated in real time as you move the carriage or Z table.

Page configuration:


Go back to the previous page


5.2.2.2 Preview Page

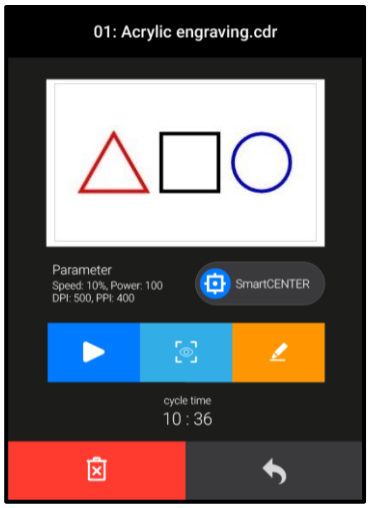

Select a file on the touch panel and click the 

button to enter the preview page. This page allows you to check more details of the file, such as the file name, output graphic preview, parameters, etc.

Page configuration:

	Output graphic preview
	Run the job or stop the job.
	Clicking this button will cause the machine to run a rectangle to show the position and size of the job.
	If you have set SmartCENTER for the file, it will appear in the preview page, please refer to chapter 5.2.3 for more details.
	Allow you to modify the parameter of laser processing. Please refer to chapter 5.2.2.3 for more information.
	Delete this file.
	Back to previous page

NOTE

There are certain conditions under which the output graphic preview may not display correctly on the touch panel. Please refer to the following content for more details.



▲ File sent via SmartCONTROL




▲ File sent via USB Storage



▲ File sent via Print Immediately function of the printer driver.

5.2.2.3 SmartCENTER Page

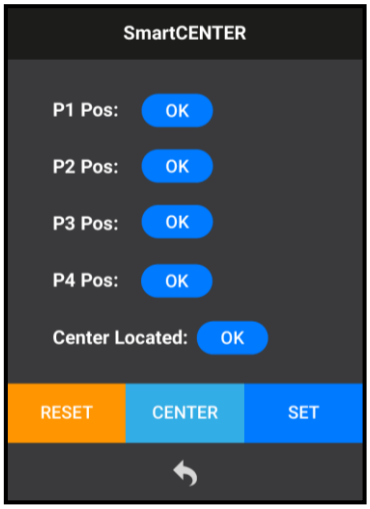

If you have set SmartCENTER for the file, you will see a "SmartCENTER" icon on the preview page. In SmartCENTER mode, the job will begin after the system positions the carriage at the center point between two points or four points indicated by the user. The SmartCENTER mode must be enabled through the driver.

Operation:

Step 1. Move the lens carriage to desired positions and click SET button. The OK button will then appear on P1 POS ~ P4 POS. (Set at least set two positions)


Step 2. After setting the positions, click CENTER button. The OK button will appear on Center Located, and the lens carriage will automatically move to the center.

Step 3. Click RESET button if you want to reset the positions.

Page configuration.



RESET	Reset all positions
CENTER	Click it make the lens carriage to the center position between two points or four points indicated by the user.
SET	If you have set SmartCENTER for the file, it will appear in the preview page, please refer to chapter 5.2.3 for more details.
	Back to the previous page

5.2.2.4 Edit Page

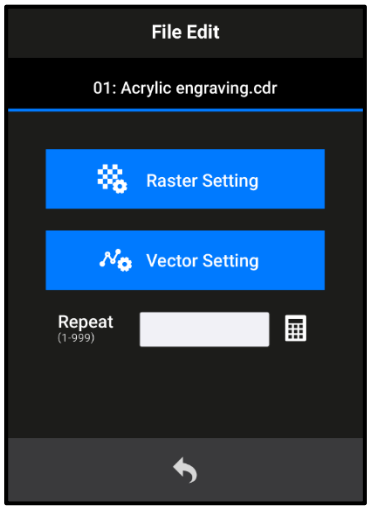

When you click on  *button in the preview page, it will enter the File Edit page to help you to adjust the parameters such as raster setting, vector setting, and repeat etc.*


Function Definition:

	The Raster Setting allows you to edit the speed and power parameters for the existing file.
	The Vector Setting allows you to edit the speed and power parameters for the existing file.
	The repeat function enables you to specify the number of times the job will be repeated.

NOTE

Before editing the parameters, please ensure the job method as Raster (engraving) or Vector (cutting) and select the correct option accordingly. For instance, if the job method as Vector (cutting) but you edit parameters intended for Raster (engraving), the changes will not take effect.


File Edit Operation:

1) Click the 

or 

button based on your job method to proceed to the next page.
2) Click the input box for **Speed** or **Power** to edit the parameters. You also can edit **PPI** value in Vector Setting. The numeric keypad will pop up, allowing you to enter the number.
3) After entering the parameters, click the XXX button to confirm the edits.
4) You can now use the new parameters to process the job.
5) To set a specific number of repetitions for the job, click on the input box for **Repeat** and enter a number (value: 1~99)


Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3 Machine Settings

The Machine Setting Page allows you to access and modify various machine settings, including: Set Lens, Tune Auto Focus, Set Table Down, Red Beam on/ off, Carriage Free, select Command Mode, File Save, Set Standby mode, Save position, Select Vector Mode, LAN setup Wizard, Scaling, Other, and Reset etc.

5.2.3.1 Select Lens

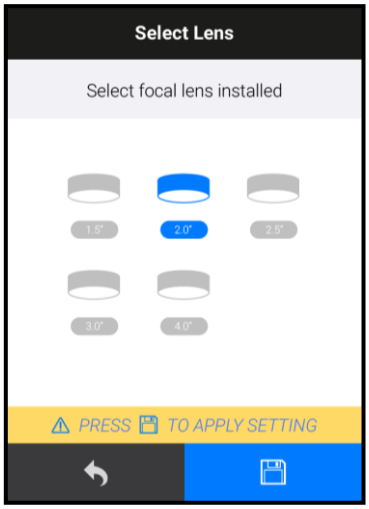


The Select Lens Page allows you to modify the lens settings after you have changed to a different focal lens. Remember to save your settings after you have made the proper changes. After that, pressing the Auto Focus button on control panel, the laser machine will conduct auto focus accordingly using the new lens setting.

Operation:

Step 1. Click a lens that you installed on your machine.

Step 2. Click  button to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

GCC LaserPro Piolas series machine include different mode which equipped different laser tubes, make sure the laser tubes installed with your machine before making adjustment. Please go to chapter 7.3 for different lens detailed information.

5.2.3.2 Tune Auto Focus



The Tune Auto Focus Page allows you to manually adjust the auto focus default value, or distance from lens carriage to the worktable (Z-axis) when the Auto Focus button is pressed.

GCC LaserPro Piolas series include different mode which equipped different laser tubes, make sure the laser tubes installed with your machine before making adjustment.

Operation:


Step 1. Select the lens from the Lens drop-down menu on touch panel.




Step 2. Press  and  buttons on control panel to adjust the height of the z-axis table until you find a precise focal distance.

Step 3. After tuning the distance, click  button and the machine will run a auto focus to save the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.3 Table Down

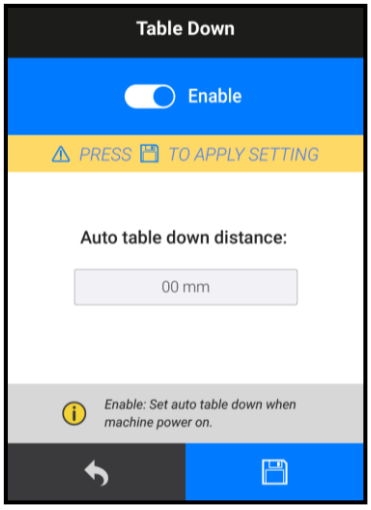

The Set Table Down Page allows you to select whether or not the LaserPro Piolas series table moving down at system startup.

Function Definition:

Enable	The machine will down the table automatically to the specific distance at the system startup.
Disable	The machine will not move the table at system startup.


Operation:

Step 1. Set the table down to “Enable” if you want the table down automatically at system startup.


Step 2. Click the input box of “Auto table down distance, then the keypad will appear and key in a value that you want and click “Enter” to confirm. (The value can be set to 1~279)

Step 3. Click the  button to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.4 Red Beam

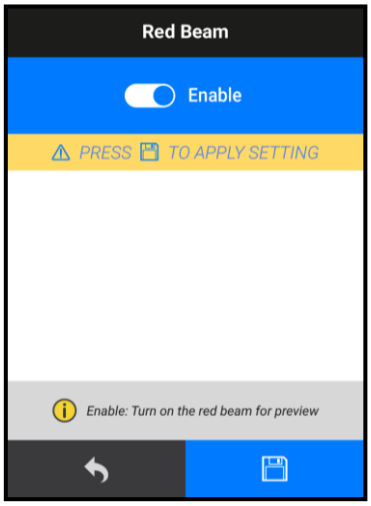

The Red Beam Page allows you to turn on or off the red dot laser pointer on the lens carriage.

Function Definition:


Enable	The red pointer will be turned on.
Disable	The red pointer will be turned off.

Operation:


Step 1. Set the Red Beam to “Enable” or “Disable”

Step 2. Click the  button to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.5 Carriage Free

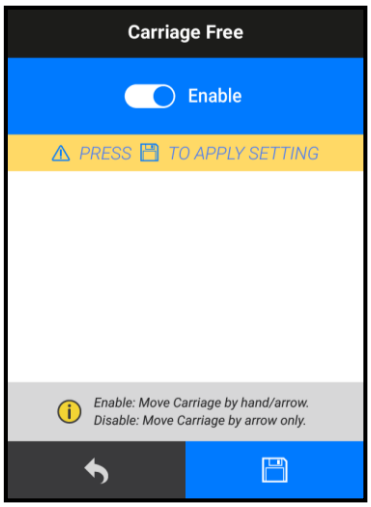

The Carriage Free Page allows you to decide whether the lens carriage should be locked or free for hand movement.

Function Definition:


Enable	The lens carriage can be manually moved by hand with the top door open.
Disable	The lens carriage will be locked and can only be moved using the control panel arrow keys.

Operation:


1) Set the Carriage Free to “Enable” or “Disable”.

2) Click the  button to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.6 File Save

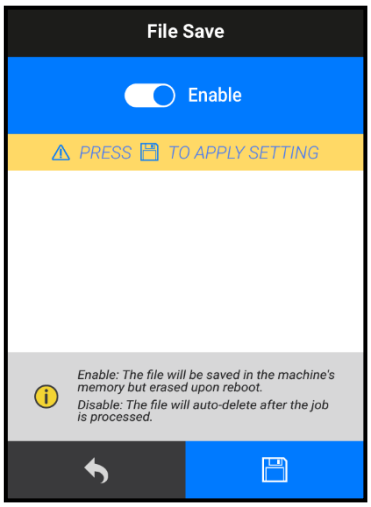

The File Save Mode Page allows you to set whether or not the LaserPro Piolas series automatically deletes each job file after processing.

Function Definition:


Enable	Files will be kept in the memory of the machine after laser processing. *When the machine reboots, all files will be deleted from the memory.
Disable	The file will be deleted after laser processing.

Operation:


1) Set File Save to “Enable” or “Disable”

2) Click the  button to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.7 Set Standby Mode

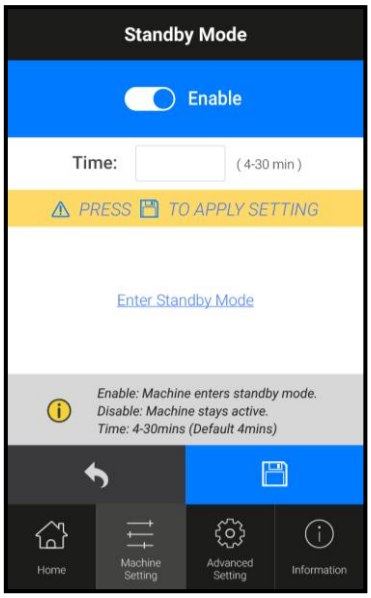


The Set Standby Mode page allows you to configure the laser machine automatically enter into power saving and reduce noises if machine is idle for a specified time.

Function Definition:

Enable	The machine will enter Standby mode when it idles for a specified time.
Disable	The machine will not enter Standby mode.


Operation:

1) Set Standby Mode to “Enable” if you want the machine to enter Standby mode when it idles for a specified time.
2) Click input box of the “Time” and key in a value you want. (The value can be set from 4~30 mins)
3) Click the  button to apply the setting.
4) Wen the machine enters Standby mode, the touch panel will display the following message.

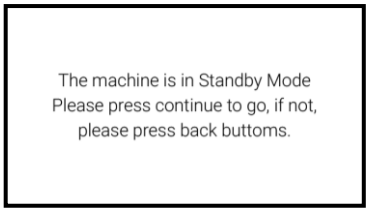


5) Press any key on control panel or click the touch panel to make the machine back to idle.

Page configuration:

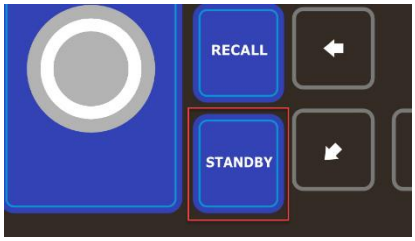Enter Standby Mode		
Make the machine enter Standby mode directly. You may also enter Standby mode by pressing the “Standby” button on control panel. 	Go back to the previous page	Apply the setting

5.2.3.8 Save Position

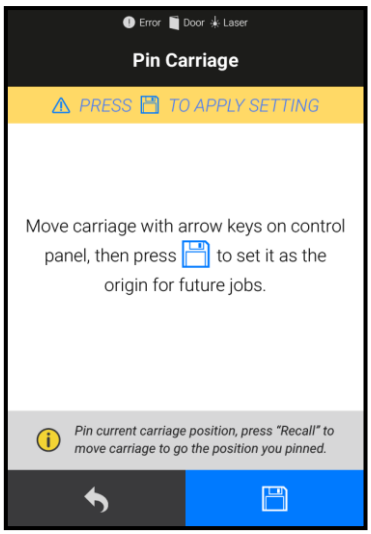

The Save Position Function allows you to save the current X-axis and Y-axis positions of the lens carriage to be the origin for subsequent jobs.


Operation:

Step 1. Move lens carriage to the specific position that you want and click  button to apply the setting.


Step 2. Anytime you want to return to the original position, please press the 

button on the control panel to quickly move the lens carriage back to the position.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.9 Vector Mode

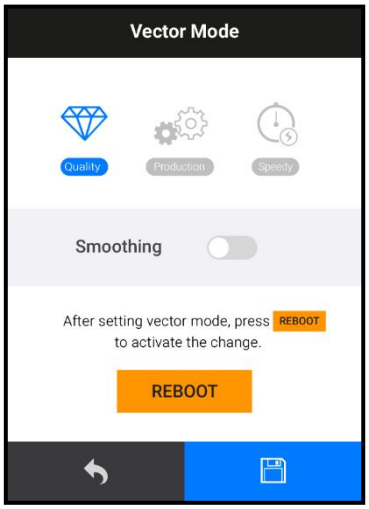

The Vector Mode Page allows you to adjust and balance vector mode's quality and speed settings based on your specific job.

Function Definition:

Quality	Slower speeds / Higher quality
Production	Medium speeds / Medium quality
Speedy	Faster speeds / Lower quality

Operation:

Step 1. Select a setting for vector object and click REBOOT button.

Step 2. The machine will reboot automatically to active the function.


NOTE

Keep in mind that speed and quality are usually at a tradeoff. The system's default is Production Vector mode.

Page configuration:

	/ REBOOT
Go back to the previous page	Apply the setting

5.2.3.10 Network Setting

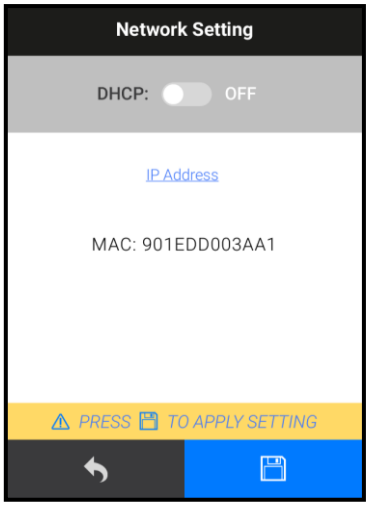

The Network Setting allows you to connect the laser machine with ethernet to transmit files from computer to laser machine for processing jobs.

Function Definition:

DHCP ON	The network is set tup to dynamic IP address, the IP address will automatically retrieve from network;
DHCP OFF	The network is set to apply static IP address, and you need to further enter the IP address, MASK, and GATE information.
IP Address	Key in the value of the IP Address

Operation:

Please refer to Chapter 4.1.2 for ethernet connectivity setup in Windows driver.


NOTE

Any changes to the network settings will reboot the machine to activate the new settings.

Page configuration:

Go back to the previous page	Apply the setting

5.2.3.11 Others

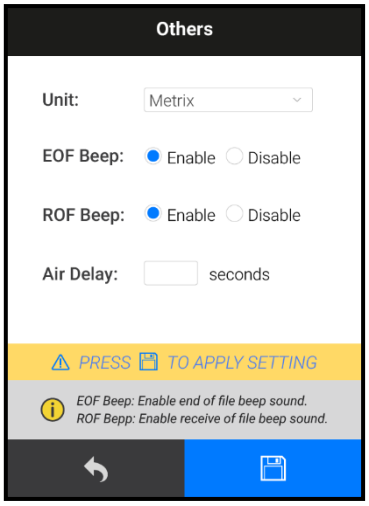


The Others Page allows you to change various settings that correspond to the control panel.

Function Definition:

Unit	Allow you to change whether the units displayed by the touch panel are in the metric or imperial system.
EOF (End of time) Beep Enable/Disable	Enable or disable an audible notification when jobs are completed.
ROF (Received of file) Beep Enable/Disable	Enable or disable an audible notification when jobs are sent.
Air Delay (1~100 seconds)	Allows you to specify the delay in seconds of the SmartAIR air-assist after the point of laser firing.

5.2.3.12 External I/O Board

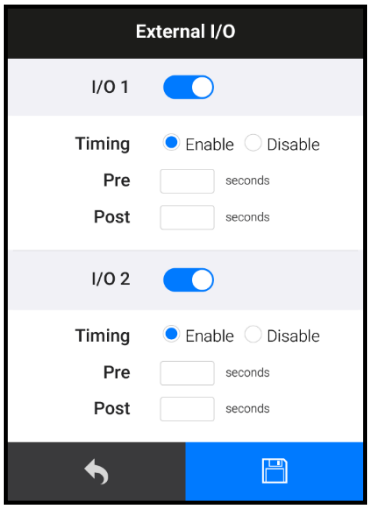

The External I/O Board allows you set parameters for the external devices.

Operation:

This operation serves as an example of a fume extraction unit.

Step 1. Ensure that the fume extraction unit is connected to the I/O port of the machine.

Step 2. Enable Input 1 or Input 2 according to your connection.


Step 3. Click the input box for "**Pre**" or "**Post**" to set the related parameter for the fume extraction unit.

Step 4. Click the  button to apply the setting.


Function definition:

Pre	Set the fume extraction unit to turn ON before job processing.
Post	Set the fume extraction unit to turn OFF after job processing.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.13 LED Light Setting

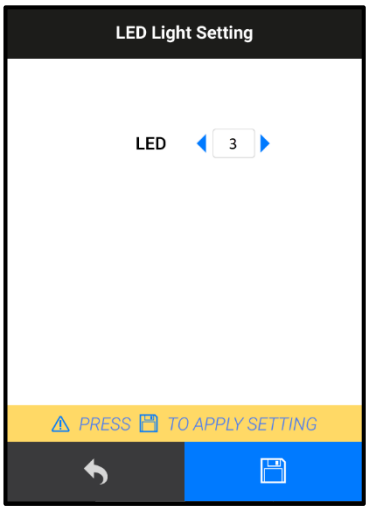


The LED Light Setting allows you to adjust the brightness of the LED light.

Operation:


Step 1. Click ◄ or ► to adjust the brightness of the LED lights (Value: 1~5, with 5 being the brightest).

Step 2. Click  to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.3.14 Door Status

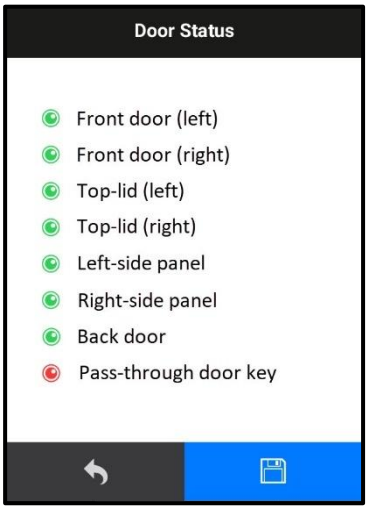

The Door Status allows you to diagnose all door sensors of the machine.

When all doors are closed but the laser still does not work properly, you can use this page to check all door sensors. The locations of all door sensors are shown in the following picture.




▲ The door sensors are installed at the bottom behind the door.





▲ Side panel sensors are installed inside, behind the side panel.

5.2.3.15 Panel Brightness

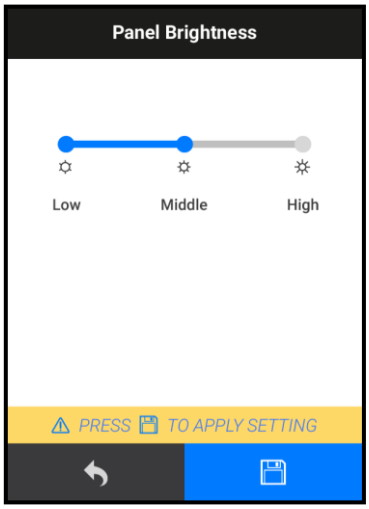


The Panel Brightness allows you to adjust the brightness of the touch panel.

Operation:

Step 1. Click a brightness level you want from Low to High.

Step 2. Click  to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.4 Advanced Settings

The Advanced Settings allows you to access multiple setting for laser machine optional periphera , including SmartGUARD, Machine Status, Laser Firing Time, Time Locker, etc.


5.2.4.1 Administrator Setting

This function is for use by GCC distributors only.

5.2.4.2 SmartGUARD

WARNING!

The SmartGUARD fire alarm system is designed as a fire detection and alarm system, rather than a fire extinguisher.

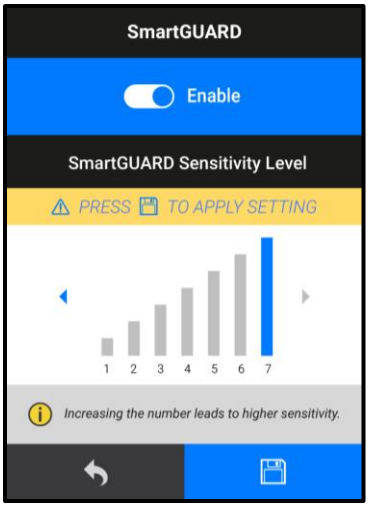


After optional SmartGUARD hardware installation, please go to Advanced Settings → SmartGUARD on touch panel to enable the SmartGUARD fire alarm.

Operation:


Step 1. Adjust the sensitivity of the SmartGUARD by clicking on the ◄ or ► buttons, with higher numbers indicating greater sensitivity.

Step 2. Click  to apply the setting.

Page configuration:

	
Go back to the previous page	Apply the setting

5.2.4.3 Laser Firing Time

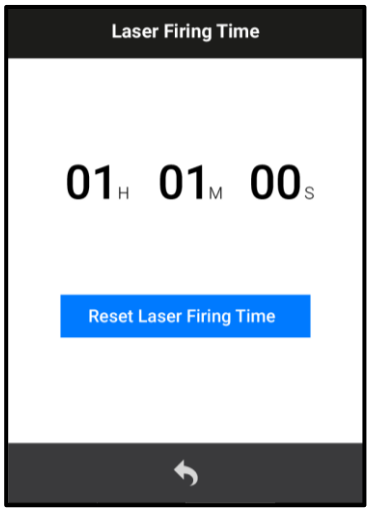

Laser Firing Time helps you check the total duration of laser firing.

NOTE

If you want to run the 'Reset Laser Firing Time' function, please contact your local dealer or distributor.

5.2.5 Information



The Information Page allows you to view information regarding the system such copyright, laser machine name, firmware version, and other information. There are two barcodes which helps you to visit GCC website and download area quickly.

5.3 The LaserPro Printer Driver


With the LaserPro printer driver successfully installed, you will need to adjust the printer and page size default settings before you can begin editing and completing jobs. By doing so, you will be setting the work area in your graphics software to match the working table area.

> **NOTE**
>
> Please make sure the LaserPro driver is set to the default printer before proceeding to the page and layout setup.

The following take Piolas 400 machine as a demonstration.

Step 1. After installing Piolas printer drive, please connect the machine with your computer/laptop by USB cable or Ethernet.


Step 2. Ensure that the LaserPro Piolas 400 has been selected as the DEFAULT PRINTER. You can go to Control Panel → Devices and Printers, then set Piolas 400 printer machine as default printer.

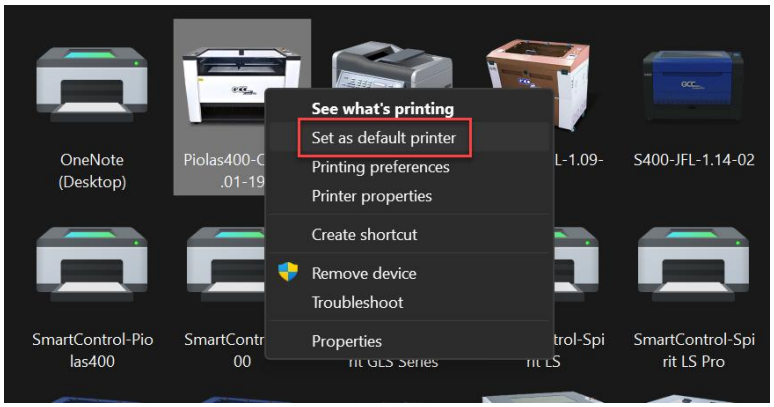


Step 3. After setting Piolas machine as default printer driver, please make sure the printer is online, not offline.



Step 4. If you discover the default setting machine – Piolas 400 offline, please double click the device and select Printer → Properties → Ports → Make sure it connected to the right port from Piolas laser machine.

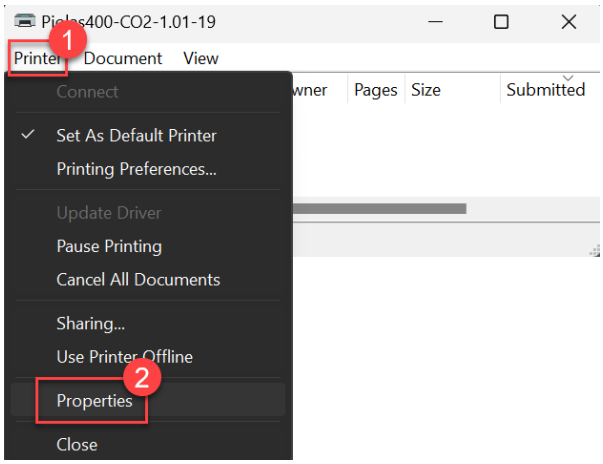

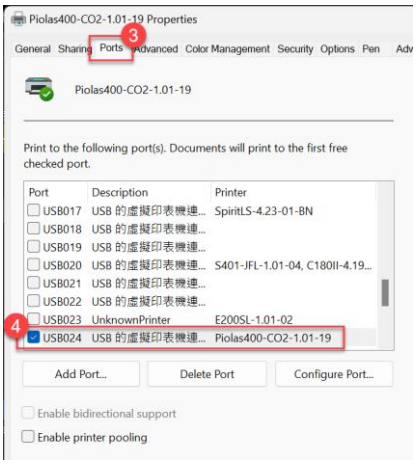

5.3.1 Page Setup and Orientation

Before using the LaserPro Printer Driver, ensure that the page and layout settings in your graphics software are properly configured.

Access the Page Setup or Layout dialog in your graphics software and set the page size and orientation to match the worktable dimensions and orientation of your LaserPro Piolas machine.

From your graphic software's Page Setup page:

- Set the page orientation in the graphics software to Landscape mode.
- Set page size to match laser machine work area size.

  Piolas 280: 710 x 510 mm (27.9"x20")

  Piolas 400: 1016 x 610 mm (40"x24")


  Piolas 400SE: 1016 x 610 mm (40"x24")

CorelDRAW Example (Page Setup and Orientation)


The following is an example of how to set the Page Setup and Orientation in the graphics software. CorelDRAW 2024 version is the designated graphics software used for this example. For other graphics software, you will need to access the corresponding Page Setup page.

The following take Piolas 400 machine as a demonstration.

1) From the primary menu, click Layout → Page Size. The options window will appear.

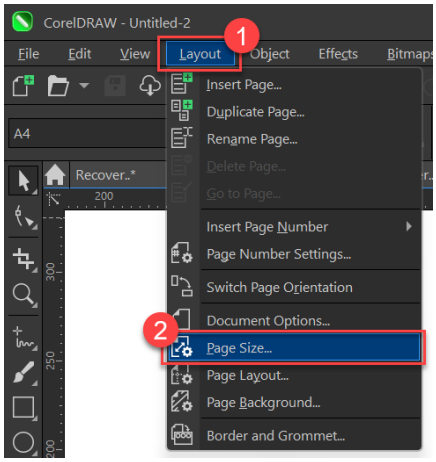

2) Click “Get page size from printer” button to set a correct page size. If you cannot get a correct page size, please make sure that the Piolas 400 printer driver has been set to the default printer.

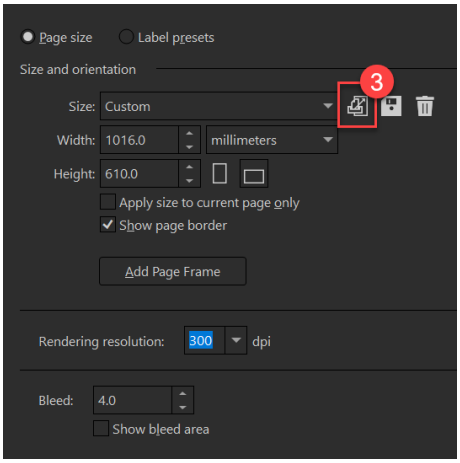

5.3.2 Color Management

The LaserPro Printer Driver uses pen colors to control the engraving and cutting parameters of the laser engraver. In addition to ensuring that your page setup and orientation are properly configured in your graphics software, you must also disable Color Management before working with the LaserPro Piolas Printer Driver.


From your graphic software's Color Management page:

- Disable Color Management or set Color Management to Off.


CorelDRAW Example (Color Management)

The following is an example of how to properly disable Color Management in the graphics software. CorelDRAW 2024 is the designated graphics software used for this example. For other graphics software, you will need to access the corresponding Color Management page.

1) From the primary menu, click Tools → Color Management… and CorelDRAW's Color Management Settings window will appear.



2) Click Default tab, select "Simulate Color Management Off" from the Present drop-down menu, then click OK to save the setting.

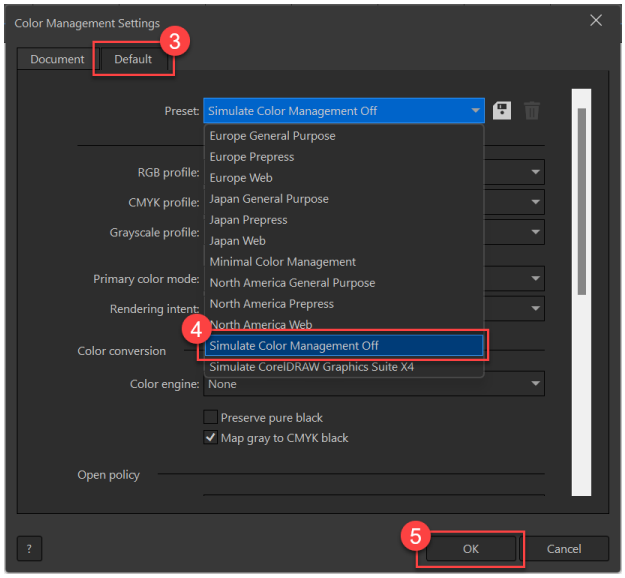

5.3.3 Using the LaserPro Printer Driver

Now after you have properly set the Page and Layout and Color Management of your graphics software, you are ready to configure the details of your actual job through the LaserPro printer driver. The LaserPro printer driver allows you to adjust your engraving / cutting options. After you have setup your image, design, or text to be engraved in your software application, you can access the LaserPro Piolas printer driver by going to <FILE> → <PRINT> → <PROPERTIES>.

NOTE

CorelDRAW was used as the software application for this screenshot example.


The LaserPro Piolas series Printer Driver consists of seven primary sections (pages) in which you will be able to choose various engraving / cutting options and settings:

- Options Page
- Pen Page
- Advanced Page
- Paper Page
- Language Page
- Raster Page (appears only in Black & White Mode)
- Stamp Page (appears only in Stamp Mode)

Tip

The following sections describe the specific functions for each of the settings found in the LaserPro Piolas series Printer Driver. If you are new to laser engraving, it is recommended that you first familiarize yourself with the general principles of the laser process in Section 6, especially the Vector Cutting and Raster Engraving concepts. This will make it easier to understand the various descriptions and terminologies used in this section.

5.3.3.1 Piolas series Printer Driver – Options Page

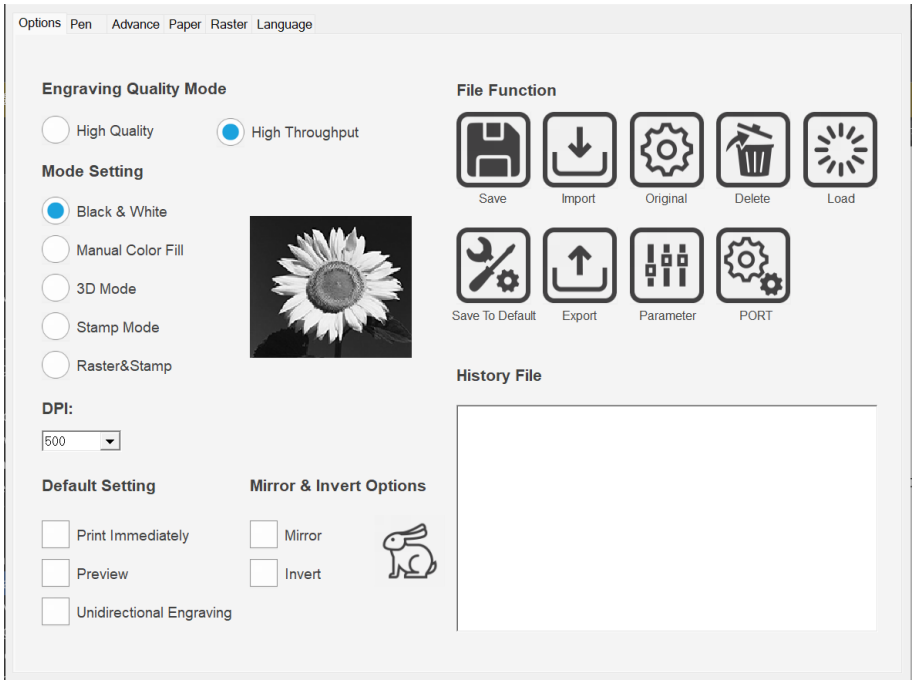

Mode Setting (OPTIONS PAGE) [DEFAULT SETTING: Black & White]

You can select from four primary mode settings, depending on your application or results you would like to achieve.

Black & White:

Select this mode when using clipart images or drawings with several colors, shades of gray, or many outlines. This mode outputs in a method similar to that of a black and white laser printer.

The GCC LaserPro printer driver will interpret colored and shaded areas as 256-level shades of gray by producing a halftone effect while engraving. Instead of engraving only solid lines, gray or halftone areas will be a collection of dots with varying density.

The entire selected image will be engraved using a single set of power and speed settings (the black pen from the PEN menu. Please refer to the next section of the detail regarding the PEN functions).

The resolution and depth of these halftone areas can be adjusted with the DPI setting found on the Options page. Please note that selecting the Black & White mode will add a new Raster page to the menu. The Black & White mode dithering settings can be changed from the Raster page. (Please refer to the Raster section below for detail). Experiment with different dithering settings to attain the desired results.

Tip

The Black & White mode interprets the processed image by the varying colors and shades. For the best results, we suggest you convert the image to a grayscale image with your graphics software prior to engraving in the Black & White mode.

NOTE

Selecting the Black & White mode will enable the Raster page on the GCC LaserPro Printer Driver, allowing you to adjust advanced stamp-related settings.


Manual Color Fill:

Specify laser type to different color pens. The GCC LaserPro printer driver allows a maximum of 16 pen parameters to be set. It will help user to set different parameters easily in one file.

Pen No.	Color	Speed	Power	Raster	Vector	PPI	CO2Freq	Air	Bridge	AF	Defocus	Laser
1		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
2		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
3		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
4		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
5		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
6		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
7		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2

3D Mode:

3D Mode allows the naked eyes to visualize the curvatures of the 3D effect by applying 200 grayscale power level technology to create different depth of engraving.

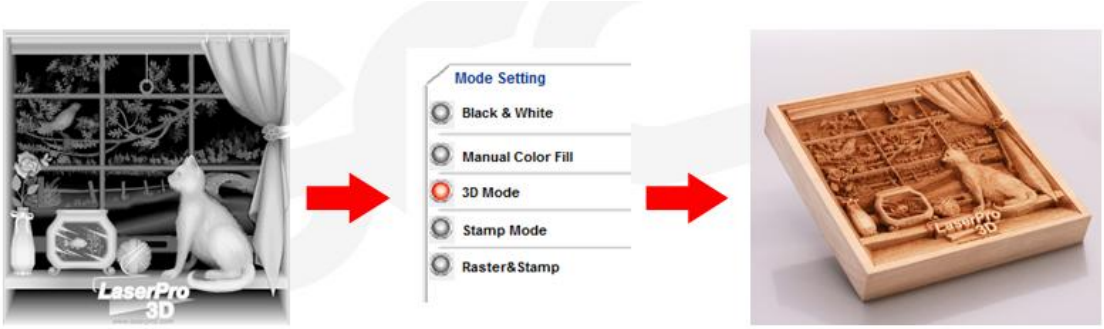

Stamp Mode:

The stamp mode is one of the more dynamic functions of the LaserPro laser engravers by applying 200 power level to create different steps.



NOTE

Selecting the Stamp mode will enable the Stamp page on the Piolas series Printer Driver, allowing you to adjust advanced stamp-related settings.

Raster & Stamp Mode:

Select this mode when you would like to engrave image on stamps. The Raster & Stamp mode combines the 256 level gray scale image processing technology and 200 power level stamp steps production requirement to create slopes.

Noted Raster & Stamp mode is only suitable for CO2 laser system, not suitable for fiber laser, and dual lasers configurations.

DPI (Options Page) [DEFAULT SETTING: 500]

DPI (dots-per-inch) represents the number of times the laser will fire over a one-inch path. This setting determines the image resolution and quality when performing raster engraving functions. Higher DPI settings result in cleaner and deeper engravings, but require more time to complete. Lower DPI settings result in coarser and shallower engravings, but require less time to complete. The LaserPro Piolas series offers 8 DPI options: 125, 250, 300, 380, 500, 600, 760, 1000, and 1500 experiment with different settings to get your desired effect.

Below is a chart for your convenience detailing the Set DPI (your input setting) vs. Actual DPI (your output results).

Set DPI	125	250	300*	380	500	600*	760	1000	1500
Actual DPI	127	254	381	381	508	762	762	1016	1524

NOTE

Outputting a full-table (25.1" x 18.1") job using 300 or 600 DPI will result in a truncation error; this is due to the large differences in set DPI vs. actual DPI output for those two particular DPI settings. Therefore, when processing a 25.1" x 18.1" job using 300 DPI, we recommend you move to the next higher DPI setting of 380. Similarly, for a 25.1" x 18.1" job using 600 DPI, we recommend you use 760 DPI.

Please note that when using Illustrator for output, the vector function supports a DPI range of 380 - 1500.

Mirror (Options Page) [DEFAULT SETTING: Unselected]

Checking this box will automatically engrave your image with a mirrored effect. This setting will flip the image along the Y-axis from left to right and vice-versa.



Tip

When engraving a stamp, via the stamp mode, the stamp image needs to be engraved in reverse (mirrored) for the final stamp to be correctly laid out.

Invert (Options Page) [DEFAULT SETTING: Unselected]

Checking this box automatically inverts / reverses the color of your image (the white areas become black and vice versa). The Invert option is not available if disabled while Manual Color File mode is selected.



Tip

Invert mode is useful when creating a stamp in Stamp Mode, as inverting your normal image will set the negative space to be engraved out, with the remaining positive space (your stamp design) protruding out.

Print Immediately (Options Page) [DEFAULT SETTING: Unselected]

Checking this will instruct the LaserPro Piolas to immediately begin the laser engraving process, when you select Print from your graphic software program. If Print Immediately is not checked, then selecting Print will transfer the job file to the macnine and will need to be initialized from the touch panel of the machine.

SmartACT (Options Page) [DEFAULT SETTING: Unselected]

By eliminating unnecessary travel of the lens carriage at the expense of some quality, SmartACT reduces the acceleration area to save of time to process a job~



Tip


There is a greater performance gain when enabling SmartACT for designs that are vertically longer than they are horizontally wide, as the SmartACT optimization modifies the movement of the X-axis of the lens carriage.

Preview (Options Page) [DEFAULT SETTING: Unselected]


Users can use the Preview function to check a simulated output of the job. An estimated working time will be shown. Please make sure to set the file printing option to “print to file” in order to activate the Preview function.

File Function (Options Page):

The file function section allows you to manage various laser parameters. It can save all your perfect parameters to be used for next time.

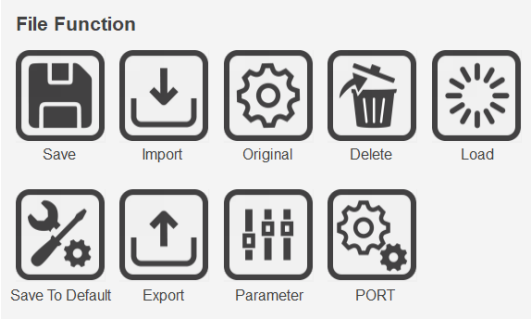

- SAVE: This function saves the current printer driver parameter settings to a file at a location of your choice. For example, if you are using the Piolas 400 CO2 model, the saved parameter file will be generated with the extension *.Piolas400CO2.
- ORIGINAL: This function will load the printer driver’s original factory parameter settings.
- DELETE: This function deletes the selected file from the History File section. Please note that this action only removes the file from the history list and does not delete the actual file from your hard drive. If you wish to permanently remove the file from your system, you must delete it manually through your operating system.
- LOAD: This function allows you to load those previously saved printer driver parameters.
- SAVE TO DEFAULT: This function allows you to save your current printer driver parameters as the default startup settings.
- PARAMETER: The material database consists of pre-built-in parameter settings to work with a wide variety of material including wood, acrylic, glass, 2py-laminated plastic, marble, tiles, rubber, coated metal, and more. With this convenient function, users can easily set up their tool by selecting the appropriate job type (engraving or cutting) and material categories for the corresponding parameters to be applied.

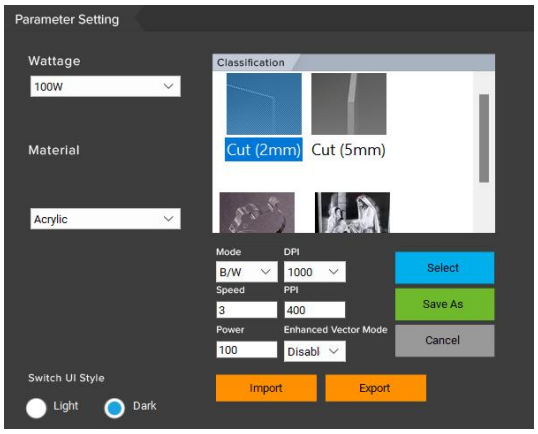


- History File: This section contains a list of the recent files you have recently created and worked with.

> **NOTE**
>
> If you are using Windows 2000 or above as your operating system, make sure you log in with an administrator or administrator-rights account in order to properly save laser parameter settings.

> **Tip**
>
> LaserPro material database settings allow you easy to load the several parameters.
> If you are loading LaserPro parameter database as your operating parameter, please click <Parameter> under OPTIONS page, and direct load from several build-in parameter folders.

5.3.3.2 Piolas series Printer Driver – Pen Page

The LaserPro Piolas series incorporates the use of 16 different colors to represent 16 different laser power and speed settings when cutting and engraving. These colors are referred to as “Pens”. Think of each pen as a designated laser setting, rather than as a color. As an example, a black and white image will use only one power and speed laser setting (Black). An image that is made up of black, red and blue colors will be processed using the laser settings designated for each particular color. In order to utilize up to 16 different pens (laser parameter settings), make sure your graphics software can recognize and utilize the 16 pen colors designated by the Piolas printer driver.

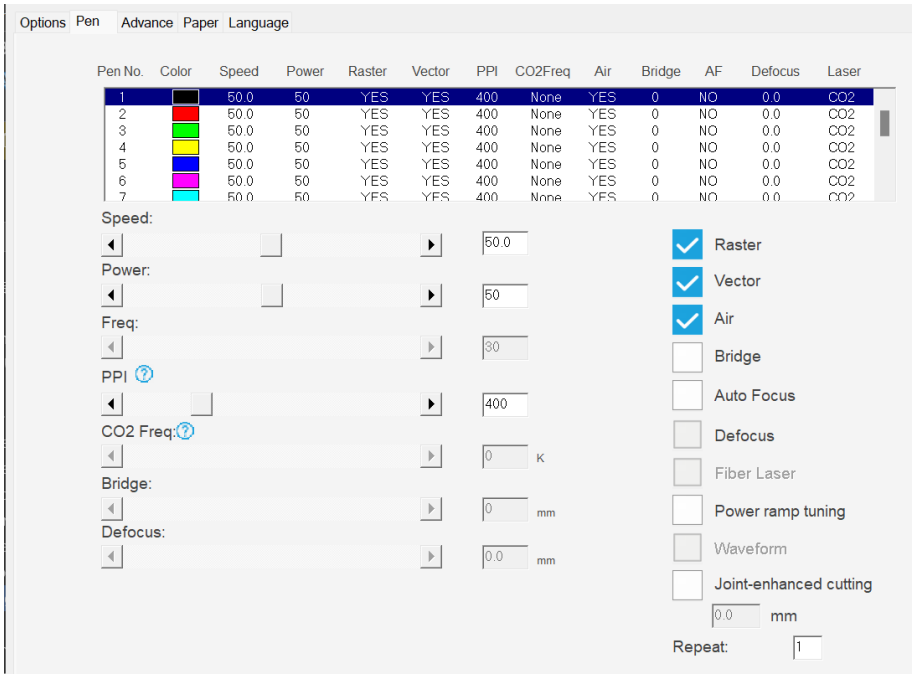

If you would like to specify your own colors to designate to a particular laser setting, then all you have to do is to double-click on that particular pen color from the pen menu and a color manager window will open where you can select “define custom colors” to define your own color (shown in the picture below). This is useful when your image is composed of colors that are not part of the pen menu’s default color selection, and instead of modifying your image, you simply assign the laser settings based on the existing colors depicted from your current image.

NOTE

The Piolas series printer driver cannot store more than 16 pen colors or different laser parameter settings per file.

Speed (Pen Page) [DEFAULT SETTING: 50]

The speed slider control the laser's speed during operation (engraving speed) with settings ranging from 0.1 – 100%. Keep in mind, the speed setting refers to the lens carriage moves at when cutting or engraving straight lines. The machine will automatically slow down when processing curves.

Tip

Cutting / engraving depth and quality are determined by a combination of power and speed. Slower speeds at higher power will produce deeper cuts and engravings, whereas higher speeds at lower power will produce more shallow cuts and engravings.

Power (Pen Page) [DEFAULT SETTING: 50]

The power slider controls the laser's power during operation (engraving power) with a range setting from 0 – 100%. The percentage setting represents the power for each laser pulse fired.

The power slider controls the laser's power during operation (engraving /cutting power) with a range setting from 0 100% (PWM signal provided by the mainboard). The percentage setting represents the power for each laser pulse fired.

Freq (Pen Page) [DEFAULT SETTING: 30] (only for fiber or dual models)

Freq (frequency) determines the peak power of the laser which affects the color variation and depth of the laser marking. A lower frequency will produce a deeper marking. You can drag the Freq. slider to the experiment the output.

Notice to select "Fiber Laser" for the corresponding pen No. first before adjusting fiber laser related parameters like Freq. and Waveform.

PPI (Pen Page) [DEFAULT SETTING: 400]

PPI (pulses-per-inch) represents the number of times the laser pulses (fires) per linear inch, exclusive for vector cutting. Higher PPI settings will generate deeper, overlapping laser pulses, resulting in cleaner cuts. Lower PPI settings (lower than 150) will result in the individual laser pulses being spread apart, resulting in a perforated effect (similar to the perforation in the paper between mailing stamps).

If you drag the PPI slider to the furthest right (maximum), the value will change to X. This completely

disables the PPI control and continuously fires the laser non-stop, without pulsing.

Think of setting PPI to X as being equivalent to turning a water faucet on with the water continuously flowing out. This an disables the power ramp functionality, which automatically control the PPI depending on the speed of the lens carriage (such as vector cutting around the corner of a square).

Tip

Cutting / engraving depth and quality are determined by a combination of power and speed. Slower speeds at higher power will produce deeper cuts and engravings, whereas higher speeds at lower power will produce shallower cuts and engravings.

Raster / Vector (Pen Page) [DEFAULT SETTING: Selected]

Checking the Raster checkbox will process only the raster functions for the areas of your design that correspond to that particular “pen” color.

Checking the Vector checkbox will process the vector functions for the areas of your design that correspond to that particular “pen” color.

As an example: a particular “pen” color may be assigned to areas in your design containing color fills (raster engraving) and very thin lines (vector cutting). By checking / unchecking the Raster and Vector will force the driver to process / ignore the color fills / thin lines.

	Vector Checked	Vector Unchecked
Raster Checked	Processes both Vector and Raster functions for that particular color	Processes only the Raster functions for that particular color (Vector functions ignored)
Raster Unchecked	Processes only the Vector functions for that particular color (Raster functions ignored)	Does not process Vector or Raster functions for that particular color

Air (Pen Page) [DEFAULT SETTING: Unselected]

This checkbox control the SmartAIR air-assist function (if you have the optional air compressor installed). By selecting a pen color and checking this box will enable the SmartAIR air-assist function for that particular pen color. As an example, if you are performing a combination of both surface raster engraving job and deep vector cutting on a material such as acrylic, you may want to enable the SmartAIR air-assist for the vector cutting sections to get the cleanest cuts. To do this, you would simply need to select the pen color that you have assigned to the sections to be cut and select the Air checkbox for those particular pen colors.


NOTE

In order to use the Air Delay function under the firmware or the Air assist function in the driver, make sure that the optional air compressor is connected to the power outlet located in the lower machine cabinet. There are two power outlets located in the right hand side of the lower machine cabinet, make sure that the air compressor is connected to the "For Air Compressor" power outlet.



Bridge Cutting (Pen Page) [DEFAULT SETTING: Unselected / 0.0 mm]

Checking the Bridge Cutting checkbox will allow users to easily create perforation lines (dash-line). Once seethe line color along with another corresponding pen can be used in tandem to indicate the length of the gap and the uncut part of a perforation line. (If Pen 1 is selected for bridge cutting, Pen 9 will be reserved to the length of the connected lines of the perforation. If Pen 2 is selected, Pen 10 will be reserved and so on…)

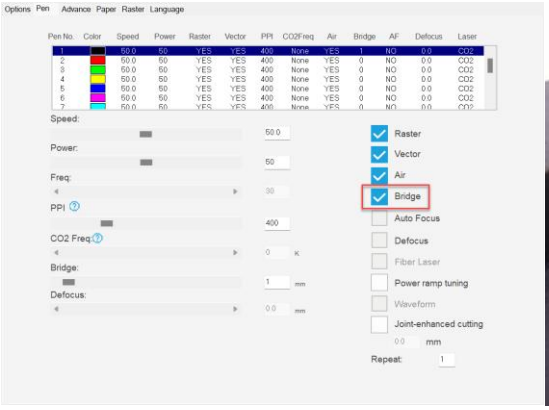



Auto Focus (Pen Page) [DEFAULT SETTING: Unselected]


This checkbox sets the Auto Focus for that particular job. With the Auto Focus button checked, the Piolas series will automatically initialize the auto focus procedure before starting the job. This will ensure the focal distance is properly set based on the particular material you are working with and the focal lens you have installed.

NOTE

Remember to attach the Auto Focus Pin if you would like to use the “Auto Focus” or “Defocus” functions.

Defocus (Pen Page) [DEFAULT SETTING: Unselected]

This function allows users to set the defocus or out of focus distance for a particular job. One of application is polishing, the acrylic can be polished after engraving.

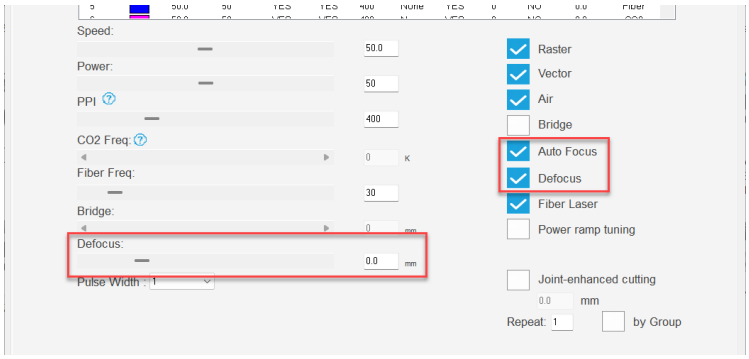


NOTE

To use the “Defocus” function, you must first select the “Auto Focus” function. It will run the auto focus and then defocus according to the distance you set.

Fiber Laser (Pen Page) [DEFAULT SETTING: Unselected] (only for fiber or dual model)

You can assign Pen to apply different laser tube for Piolas fiber or dual model, CO2 laser as the default, by selecting “Fiber Laser” option to switch the corresponding Pen No. to apply fiber laser.


Only when assign the specified Pen to Fiber Laser, the related fiber laser settings, ie. Freq. and Waveform can be adjusted for that Pen.

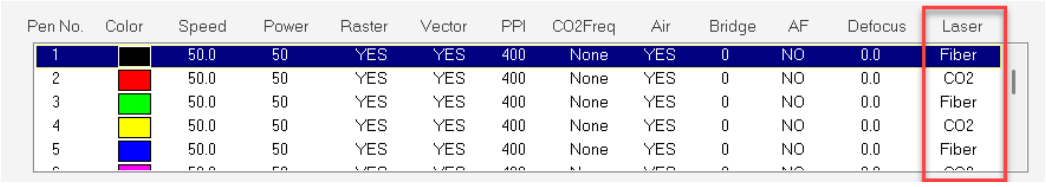

Pen No.	Color	Speed	Power	Raster	Vector	PPI	CO2Freq	Air	Bridge	AF	Defocus	Laser
1		50.0	50	YES	YES	400	None	YES	0	NO	0.0	Fiber
2		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
3		50.0	50	YES	YES	400	None	YES	0	NO	0.0	Fiber
4		50.0	50	YES	YES	400	None	YES	0	NO	0.0	CO2
5		50.0	50	YES	YES	400	None	YES	0	NO	0.0	Fiber

Power Ramp Tuning (Pen Page) [DEFAULT SETTING: Unselected]

If the material is very sensitive to the laser, it may cause poor cutting results at the start point. Power Ramp Tuning allows the user to adjust the power parameter for the beginning of each job, which can help improve this issue to some extent.

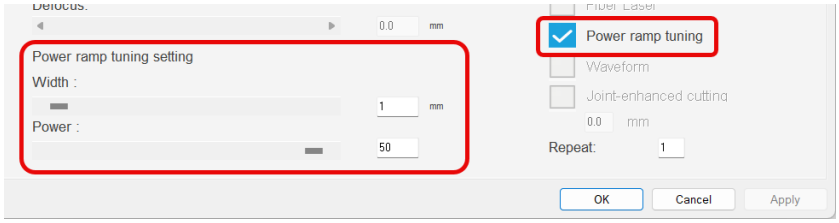

The following is the function explanation:

Width (1~5): It enables the user to set how many points would be applied the power setting.

Power: Set the power parameter for power ramp tuning.


> **NOTE**
>
> The power parameter for power ramp tuning cannot exceed the power parameter. For example, if the power is set to 75%, then the maximum power parameter for power ramp tuning is also 75%.

Joint-Enhanced Cutting (Pen Page) [DEFAULT SETTING: Unselected]

Some materials exhibit poor absorption rates for laser beams, leading to incomplete cutting. To address this issue, the **Joint-Enhanced Cutting** function allows users to set an additional cutting distance. If the cutting result is incomplete on some materials, please enable this function and set the appropriate distance. The lens carriage will backward or extend a specific distance according to the object's shape when the lens carriage reaches the end point.


Please refer to the following examples for more information.

If Joint-Enhanced Cutting value is -2 mm

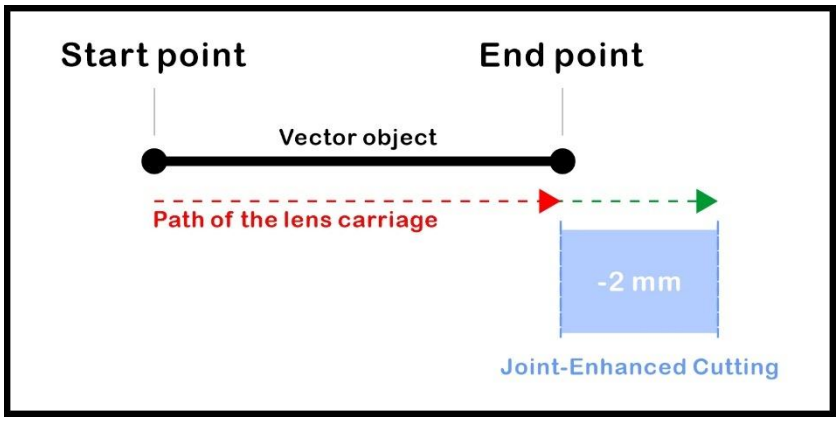

The lens carriage will move extend specific distance according to the object's shape when the lens carriage reaches the end point.

If Joint-Enhanced Cutting value is 2 mm

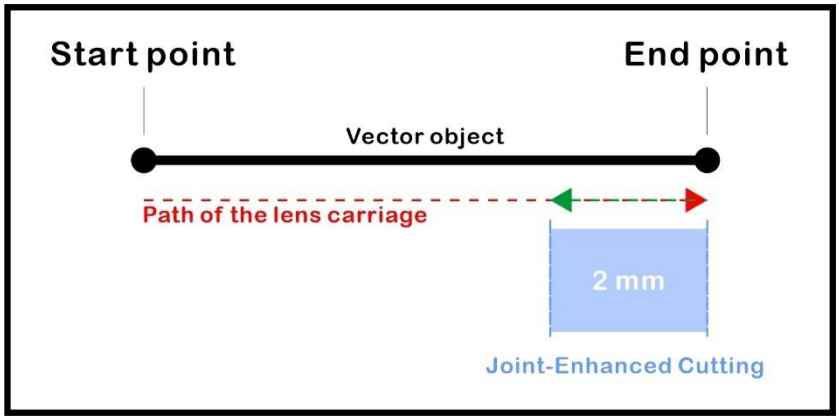

The lens carriage will move backward specific distance according to the object's shape when the lens carriage reaches the end point.

Repeat (Pen Page) [DEFAULT SETTING: 1]

It allows the user to set a number for job repetition. Double-click the input box for repeat and enter a number (range: 1-99). The job will then repeat accordingly.

Repeat (Pen Page) [DEFAULT SETTING: 1]

It allows the user to set a number for job repetition. Double-click the input box for repeat and enter a number (range: 1-99). The job will then repeat accordingly.

Pulse Width (Pen Page) [DEFAULT SETTING: 1]

GCC Fiber Laser is equipped with a unique Pulse Width function that allows users to precisely control laser pulse parameters for more efficient and effective processing. For example, low repetition rate, high-energy pulses can be used for rough material removal, while higher frequency, lower-energy pulses are suitable for polishing to achieve a better surface finish.

Before enabling the Pulse Width function, please select “Fiber Laser” for the desired Pen No.


To achieve a high-quality finish, a less aggressive pulse width is applied at the beginning to avoid perimeter ridges, followed by a longer, high-energy pulse for higher material removal. Short Pulse Width settings are also used during and after engraving to clean the surface and remove debris.

Please note that there is a trade-off between material removal rate and engraving quality.

Below is the Pulse Width parameter table for different fiber laser models.

Pulse Width	Cut-off Frequency (kHz)		Max. Pulse Frequency
	30JML	60JML	
1 (CW)	-	-	-
2	1300	1950	4000
4	750	1350	4000
6	480	850	4000
9	375	600	4000
13	250	360	3000
20	170	252	3000
30	135	187	3000
45	110	132	2000
60	100	115	2000
80	90	90	2000
100	80	80	1000
150	45	57	1000
200	37	48	1000
250	37	46	900
350	37	35	600
500	37	30	500

5.3.3.3 Piolas series Printer Driver – Advanced Page

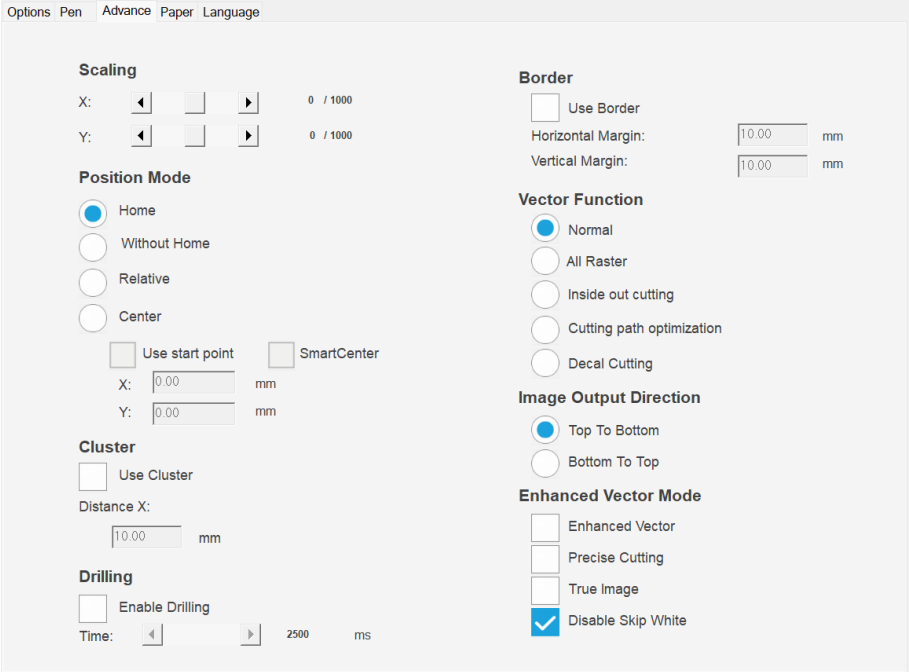

Scaling (Advanced Page) [DEFAULT SETTING: 0]


In some cases you may find a slight output inaccuracy in the actual output compared to what you have set in the computer. This margin of error or offset is extremely small (approximately 1/300). What this means is that there may be a 1-unit offset for every 300 unit increments. As an example, if you engrave a 300mm straight line, it may end up measuring only 299 mm or 301 mm in the final output. In this case, you will want to set the scaling setting to +1/1000 or -1/1000 respectively to compensate. A general rule of thumb is for every 300 unit increment, you will want to adjust the slider by +1 if the final output is 1 unit increment shorter or -1 if the final output is 1 unit increment longer than your graphic design setting.

Position Modes (Advanced Page) [DEFAULT SETTING: Home]

These selections allow you to control the positioning of the laser head after each job completion and before the next subsequent job.

- Home: Resets the positioning of the laser head to the ‘home position’ (upper-right) before and after each job.
- Without Home: The laser head will start the next job based on the position from its graphic application software setting, from the last position of the previous job. Upon completion of the current job, the laser head will remain at the last position of the previous job.

- Relative: This mode sets the current laser head position to correspond to the origin (top left) position of the graphic software. Therefore, the laser head will process the job from its current position relative to its setting in the graphics software.
- Center: Sets the current position of the laser head as the center point for your subsequent job. As an example, if the subsequent job is to vector cut a circle and you have the Position Mode set to Center, then the Piolas will vector cut a circle around the initial position of the laser head.
- SmartCENTER: The SmartCENTER function is a quick and easy way to precisely locate the center point between two points or four points.

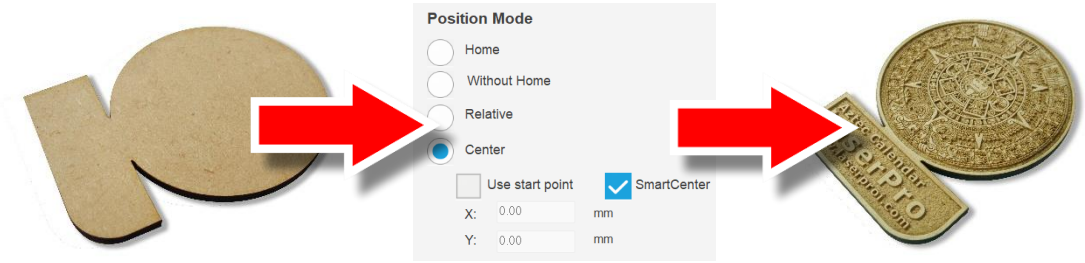

Tip

- The SmartCENTER function is a quick and easy way to precisely locate the center point between two points or four points. It is a great tool for users whose jobs often require engraving on specific locations such as on award signs and plaques.
- It is highly recommended you enable the red dot laser pointer when setting / adjusting the Position Modes, as this will ease your job positioning with enhanced accuracy.

Image Output Direction (Advanced Page) [DEFAULT SETTING: Top to Bottom]

These selections allow you to control the direction in which the system processes an engraved image.



- Top To Bottom: Selecting this will force the system to process the current task by moving the lens carriage from the top to the bottom of the image (rear end to front end of the work table).
- Bottom To Top: Selecting this will force the system to process the current task by moving the lens carriage from the bottom to the top of the image (front end to rear end of the work table)

Normally, the LaserPro Piolas engraves from left to right, top to bottom. Selecting Bottom Up will alter the engraving sequence and the engraving will start from the bottom and work its way to the rear of the working table.

Tip

In situations where the material you will be working with may produce a lot of dust byproducts and you are utilizing the optional air extraction system, it is recommended that you select the Bottom To Top image output direction option. This will minimize the amount of dust byproducts lodged in the engraved sections as the air extraction system is vented from the rear of the machine, the same direction as the image is processed.

Border (Advanced Page) [DEFAULT SETTING: Unselected]

In cases where you are working with a negative image (negative outline areas of your image are engraved, rather than the positive areas), you may wish to include a border around your image.


To properly add a border, you will first need to Invert your design from the Options Page, then check Use Border and specify a value for the thickness of the border you would like to add to your design. This mode is useful for engraving rubber stamps, as it allows you to create the outline around your stamp image.

NOTE


If you wish to use the Border and Cluster function simultaneously, the Border Thickness value must be less than the Distance value specified in the Cluster setting.

Vector Function (Advanced Page) [DEFAULT SETTING: Normal]


- Normal: This selection will not apply any special advanced vector function to your job. This is the default Vector Function setting.
- All Raster Output: This selection will instruct the printer driver to process your entire image as a raster engraving. Any vector lines within the image will be treated as raster data and outputted as a raster engraving, similar to a dot-matrix printer.

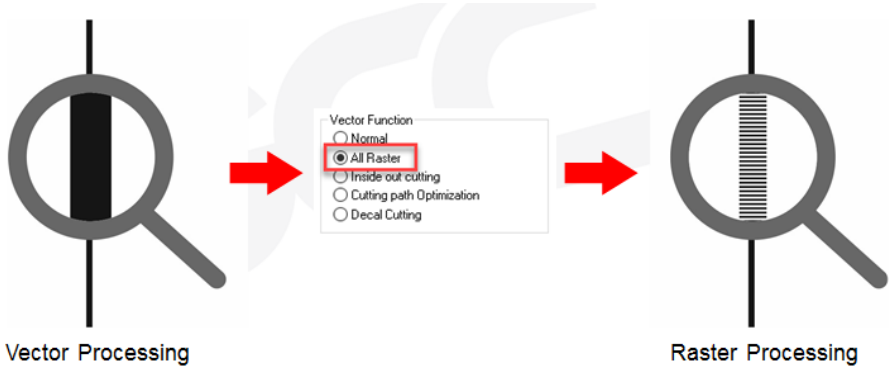


- Inside out Cutting: This setting will always automatically direct the laser to cut from the inner most vector shape and move outwards.

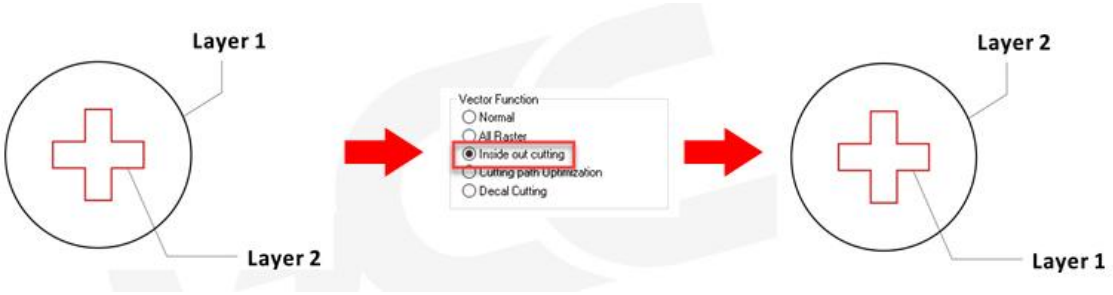

- Optimization Sorting: This is a setting that will minimize your process time. When selected, the printer driver will analyze your image and automatically determine the most efficient processing path to process your image.

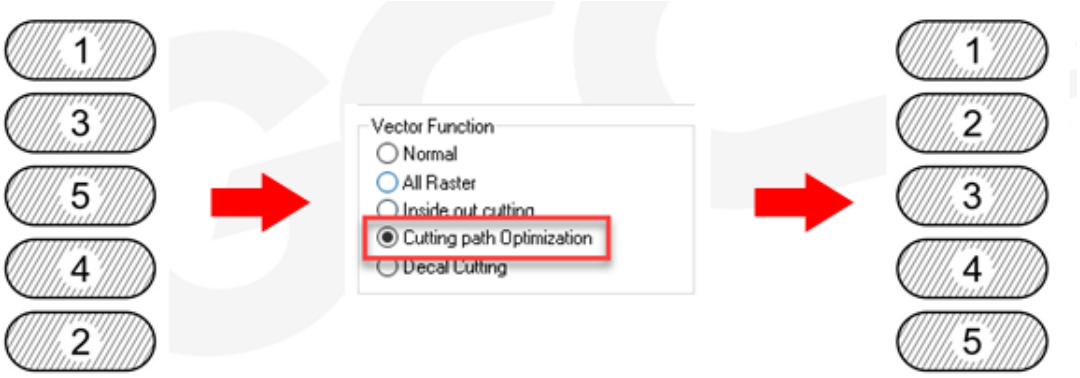

- Decal Cutting: this function is developing to reduce material weeding job after laser cutting for multiple layers adhesive material , such as lettering vinyl, heat transfer film, and twill film. This function allows allocating different parameters for corresponding decal layer numbers to do die cut (cut through media) for the unwanted parts, and kiss-cut (half cut) for the kept material parts, after the laser cutting, users can just peel off the material to get rid of waste parts.

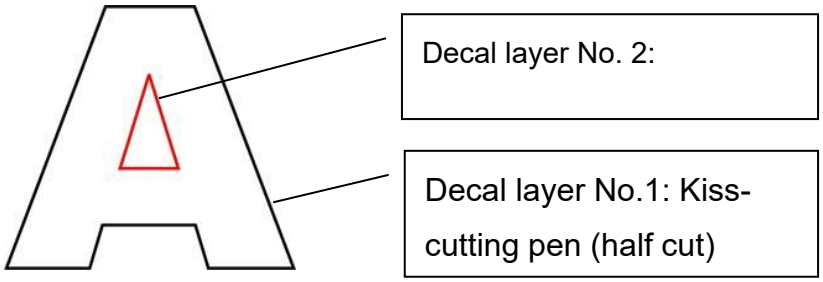

You are welcome to visit below link for easy understanding:

https://youtu.be/YgGTMHqtWqE?si=3qfBAxMjBtKbBv13

Enhanced Vector Mode (Advanced Page) [DEFAULT SETTING: Unselected]


This setting allows you to improve the cutting quality at the expense of speed. Your engraving speed will be dropped by 50%, to maximize the cutting power. We recommend that you enable this function when cutting thicker material.

Drilling (Advanced Page)

The drilling function is available only for use with AutoCad. Users can insert dots from AutoCad's tool bar and use the drilling function to set the drilling time required to create holes.

Use the default "dot" tool ( ) from the tool bar to create dots which will be interpreted as drilling locations.

Use the adjusting bar on under the "Drilling" function to set the drilling time (spot delay) required. The size of the drilled hole can be adjusted by deploying a longer or shorter drilling time.

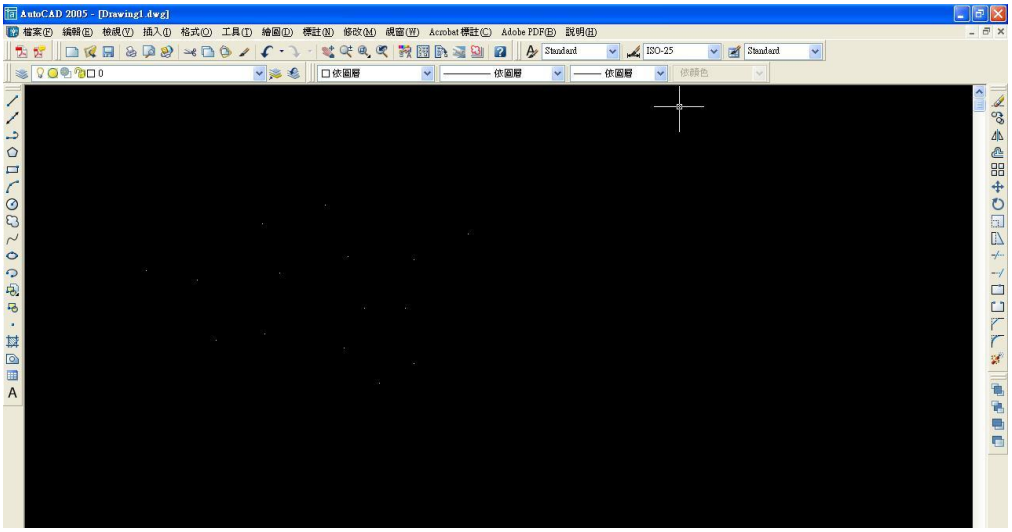

Use Cluster (Advanced Page) [DEFAULT SETTING: Unselected]

This setting allows you to change how the Piolas interprets and processes individual / independent areas of an image in order to minimize job-processing times. The Cluster function is only applicable when multiple areas of an image are broken down and isolated from each other (areas not touching each other, blank space in-between). Another condition that must be met for the Cluster function is that these individual areas of your design must have some X-axis overlap, meaning that they should be to some extent side-by-side with empty spaces between them. The distance value can be set by the user and represents the limit or cutoff point in which side-by-side objects will be processed in Cluster mode or not. If the distance between side-by-side objects is greater than the set distance value, then the individual

areas will be processed in Cluster mode. Conversely, if the distance between side-by-side objects is lesser than the set distance value, then the individual areas will be processed normally (not via Cluster mode).

An example of an image that would benefit from the Cluster function would be: 2 squares to be engraved, side-by-side on the X-axis with a 20 cm gap in between them. In this scenario, you would want to enable the Cluster setting and set the distance to a value less than 20. By doing so, the laser will completely process one square and “leap-frog” to the second square, rather than processing both squares simultaneously. The resulting processing time is minimized by eliminating the unnecessary travel distance the laser head needs to make across the X-axis in between squares, if they were to be processed simultaneously.

NOTE

If you wish to use the Border and Cluster function simultaneously, then the Border Thickness value must be less than the Distance value specified in the Cluster setting.

Enhance Vector (Advance Page) [DEFAULT SETTING: Unselected]

This setting allows you to improve the cutting quality at the expense of speed. Your engraving speed will be dropped by 50%, to maximize the cutting power. We recommend that you enable this function when cutting thicker materials.

Precise Cutting (Advance Page) [DEFAULT SETTING: Unselected]

Precise cutting ensures accurate results for VECTOR objects. The machine's firmware integrates a scale value specifically for VECTOR objects. If you desire the most precise cutting results, we recommend enabling this function.


NOTE

Precise Cutting does not support RASTER objects. If your job includes both VECTOR and RASTER objects, DO NOT enable this function.


True Image Mode (Advance Page) [DEFAULT SETTING: Unselected]

This setting allows you to improve the engraving quality by reordering the line by line output sequence and by doing so masking the banding problems. This feature is only suitable for engraving large sized graphics. Note: The overall working time will be increased.

True Image is a function that will shuffle the normal engraving sequence to produces a nicer engraving output by reducing possible banding occurrences.

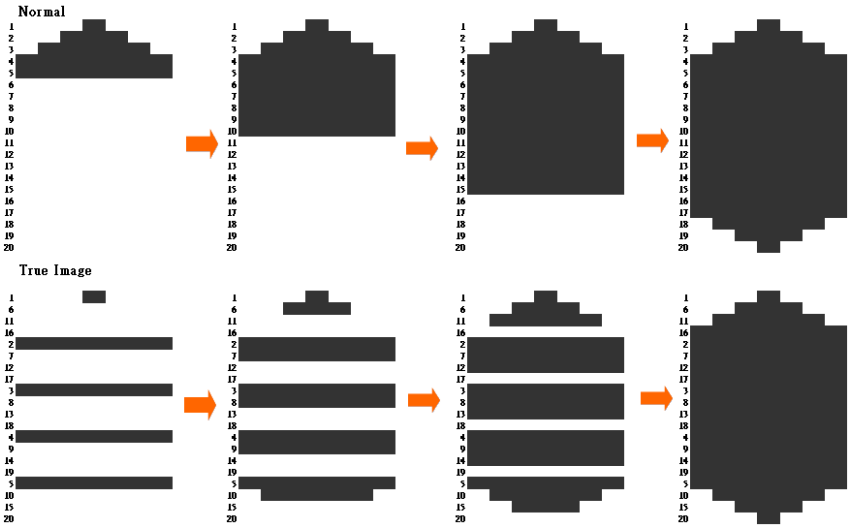

5.3.3.4 Piolas series Printer Driver – Paper Page

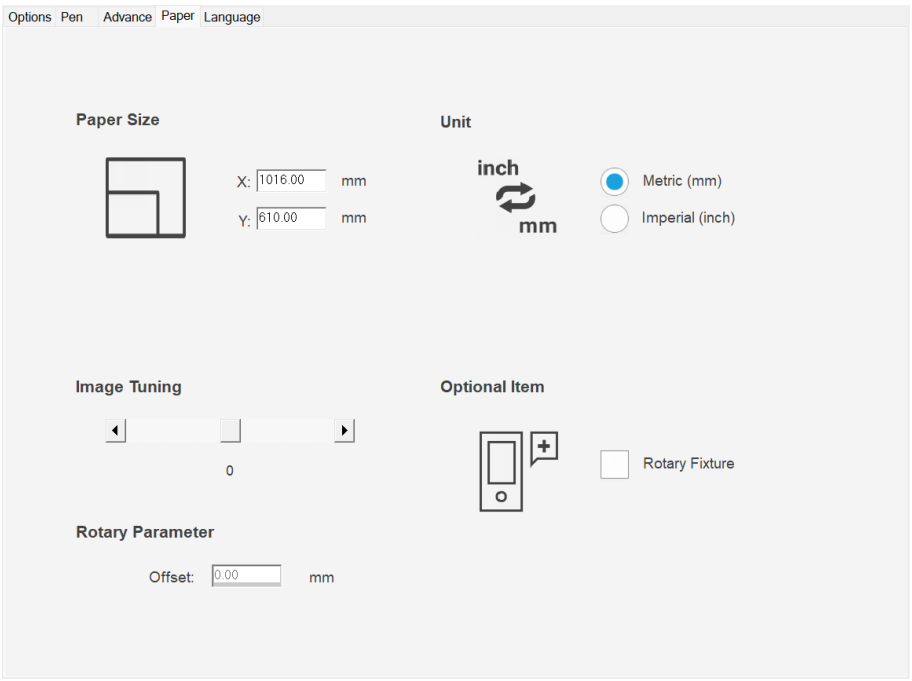

Paper Size (Paper Page)

The paper size represents your total work area. Ensure that the paper size is never set greater than the working area. The X value represents the length and the Y value represents the width.

> **NOTE**
>
> When using the optional rotary attachment system and with the Rotary Fixture option checked, the X value represents the length of your working piece. The Y value will be changed to Diameter, which represents the diameter of your working piece (at the position you wish to engrave).


Unit (Paper Page) [DEFAULT SETTING: Metric (mm)]

Here you can set your preferred measurement standard in which you would like to use with the Piolas printer driver. You can choose between metric or imperial standards.


Image Tuning (Paper Page) [DEFAULT SETTING: 0]

In the event that you are processing extremely fine and detailed designs requiring near- microscopic edge-to-edge precision, you will need to adjust the image tuning setting. To adjust this setting, we recommend that you engrave a small black square design as a sample and use a magnifying glass to view the engraved results.

When you look at your engraved test square under a magnifying glass, you may notice the edges of your square may be slightly offset, with every consecutive engraved even or odd line protruding past the square's ideal edge. This occurrence may occur on the left or right side of the square and can be compensated for by the image tuning setting. In the diagram below, the arrows refer to the direction the laser head is moving to generate that engraved line. If the first and every other line protrude to the left of the square's ideal edge, you will want to set the image tuning to a negative value. If the first and every other consecutive line protrude to the right of the square's ideal edge, you will want to set the image tuning to a positive value. The further the protruding lines are from the square's ideal edge, the larger you will need to set the Image Tuning value to compensate.

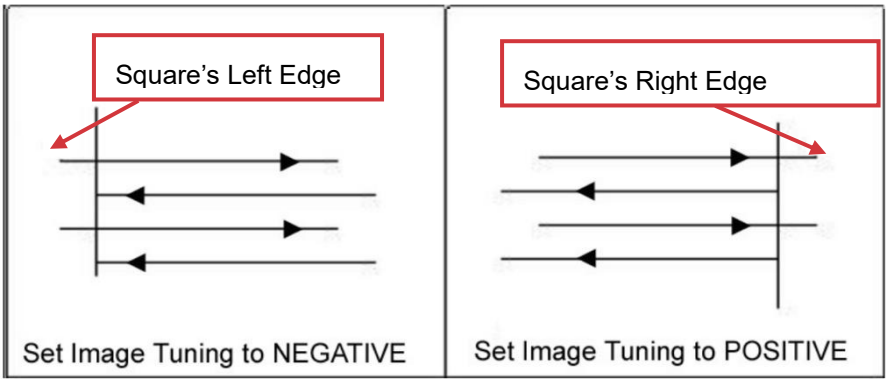

The following is an example that has the proper image tuning, and demonstrates this significance when engraving fine, small, intricate text. The following two pictures show engraved text magnified with no image tuning (left picture) and image tuning enabled (right picture).

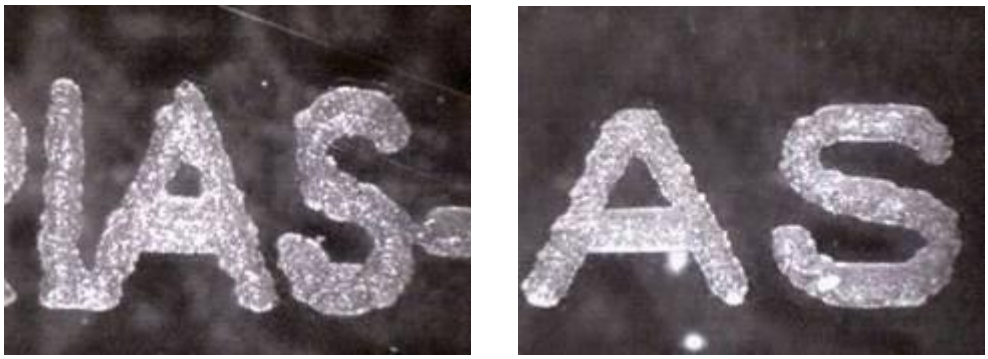

Rotary Fixture (Paper Page) [DEFAULT SETTING: Unselected]

NOTE


This option is only to be used with the Rotary Attachment optional accessory properly set up. For instructions on how to set up the Rotary Attachment, please refer to Chapter VII of this manual.

You will need to select this option when processing a job with the optional rotary attachment system to engrave on round or cylindrical objects. When you have your material and rotary attachment properly set up:


1) Check the Rotary Fixture function and notice the change in the Paper Size fields under Paper Size, the X value represents the length of your work piece. Enter the length of your work piece in this field.
2) Under Paper Size, the Diameter value represents the diameter of your working piece (at the position you wish to engrave). Enter the diameter of your work piece in this field. Again, remember the proper diameter value would be the diameter location, at the point of engraving on your work piece.
3) Under Rotary Parameter, the Offset value represents distance from the open end of your work piece to the base of the padded rubber wheel. This value will be displayed on the LCD panel. Enter the proper offset value in this field.

5.2.3.5 Piolas series Printer Driver – Language Page

This page allows you to specify the language displayed by the Piolas Printer Driver. Current language options allow for: English, Spanish, French, Chinese (Simplified, Traditional), Japanese, and German. Remember to select “Save to Default” on Options Page to save the specified language.

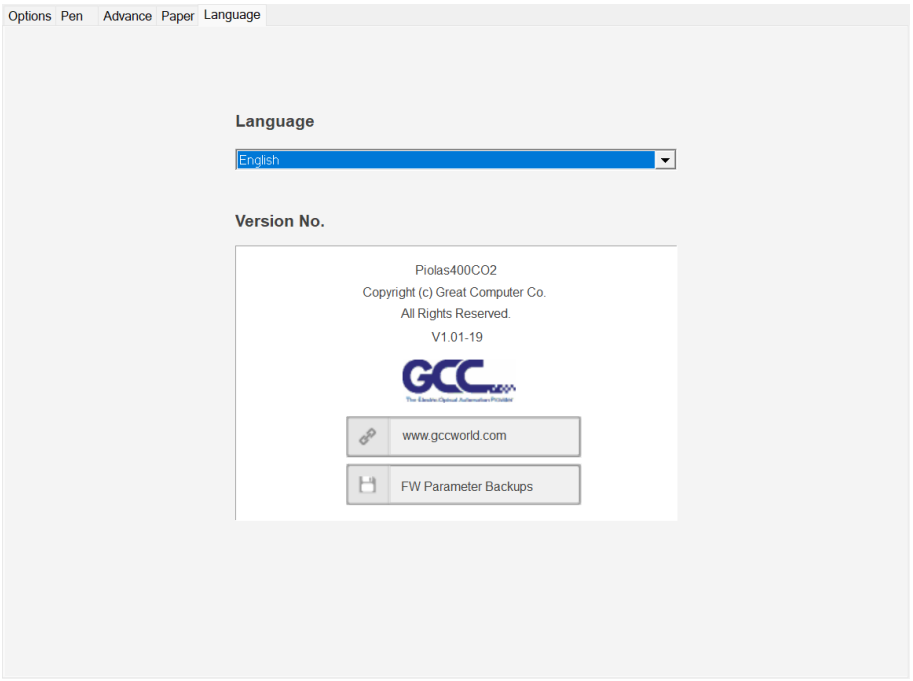


5.2.3.6 Piolas series Printer Driver – Raster Page

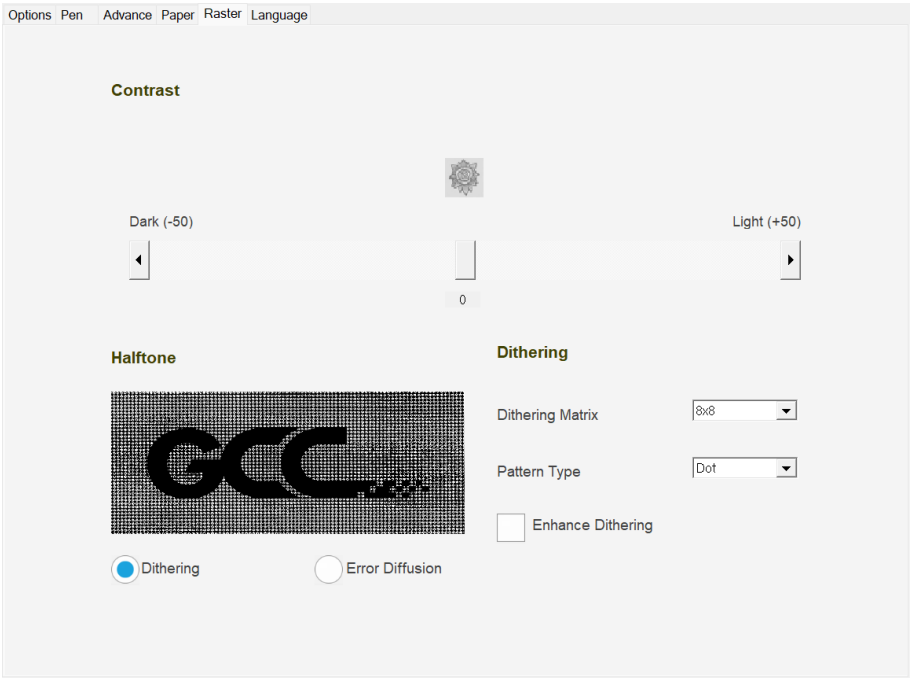

Dithering [DEFAULT SETTING: 0]

This option control the way a raster-engraved image is processed. Each pattern type uses a different shape and arrangement of dots to compose the shading effect of a raster image.

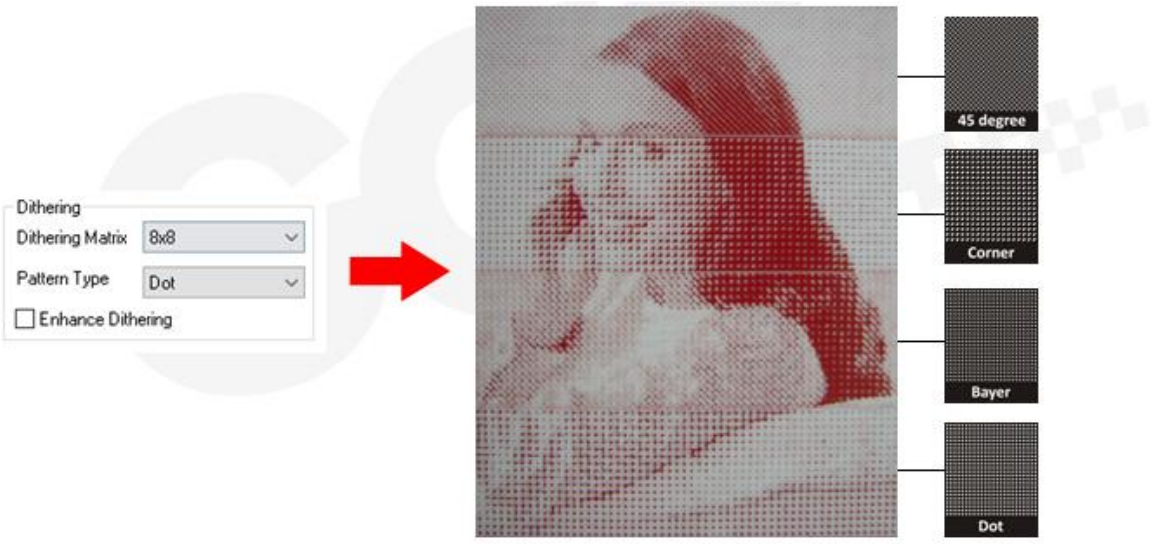

NOTE

The Raster Page is only available when Black & White Mode Setting is selected from the Options Page, this page offers a number of advanced Raster Engraving output options.

Contrast (Raster Page) [DEFAULT SETTING: 0]

This provides a quick and easy way to immediately adjust the contrast of an engraved image. Moving the slider to the Dark setting will increase the contrast level of the engraved output, whereas moving the slider to the Light setting will decrease the contrast level of the engraved output.

Tip

There are other ways to adjust an engraved image's contrast such as: adjust the power / speed settings or simply adjust the contrast of the image in software with the graphic software application.


Halftone (Raster Page) [DEFAULT SETTING: Dithering]

This option control the way a raster-engraved image is processed. The "digital image to engraved output" process can be processed via two methods: Dithering or Error Diffusion. Each offer additional output options yielding different output effects, style, and quality.

- Dithering: Interprets and outputs the raster engraving via the dithering method. This mode will allow you to select the Pattern Type and Dithering Matrix, and Enhanced Dithering.
  - Pattern Type: Dot, Bayer, Corner, 45 Degree [DEFAULT SETTING: Dot]
    Each pattern type uses a different shape and arrangement of dots to compose the shading effect

of a raster image.


The following diagram is an example of the raster effects when using the different pattern

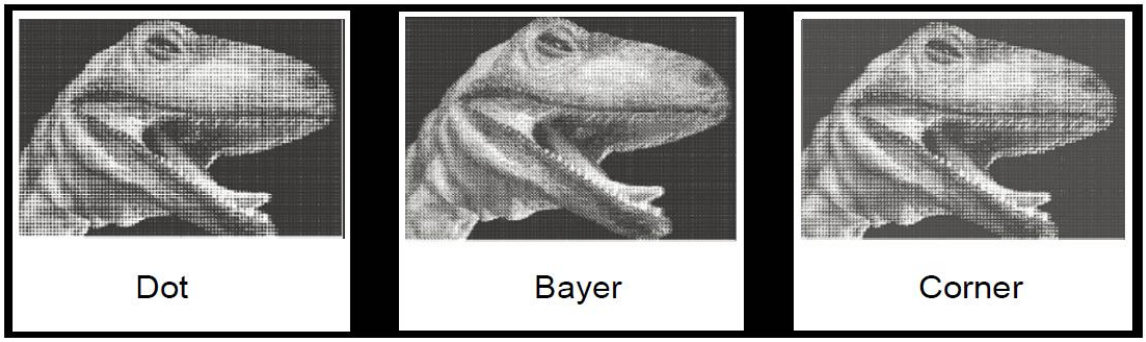

- Dithering Matrix: Variable depending on the Pattern Type selected. [DEFAULT SETTING: 8x8]

  This control the resolution (dot size) and the number of dots the image is broken down into for the dithering process. As an example, selecting 2 x 2 will shade with a 5-grade halftone, where as an 8 x 8 Dithering Matrix will dither with a 65-grade halftone.

  The following diagram is an example of the raster effects when using the different dithering matrices.

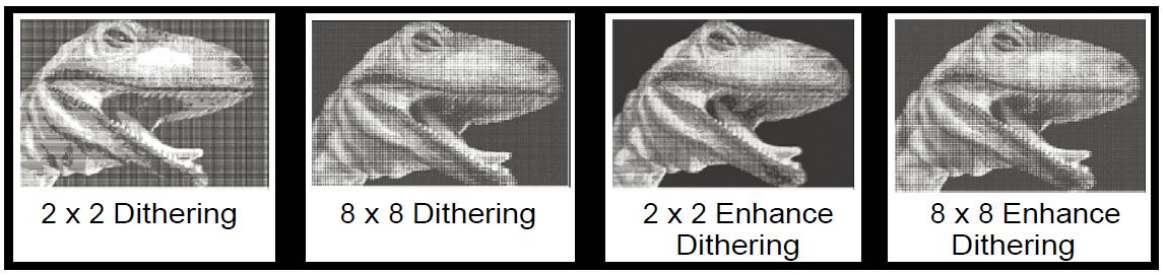

- Enhance Dithering [DEFAULT SETTING: Unselected]


  Selecting this will produce a finer dithering output.

- Error Diffusion (Raster Page): Interprets and outputs the raster engraving via the error diffusion method. This mode will allow you to select from three diffusion types: Floyd, Stucki, and Jarvis.

- Diffusion Type: Floyd, Stucki, Jarvis [DEFAULT SETTING: Floyd]

  Each diffusion type presents the shade of image as different spread halftones instead of dots to compose a raster image.

  The following diagram is an example of the raster effects when using the different diffusion types.

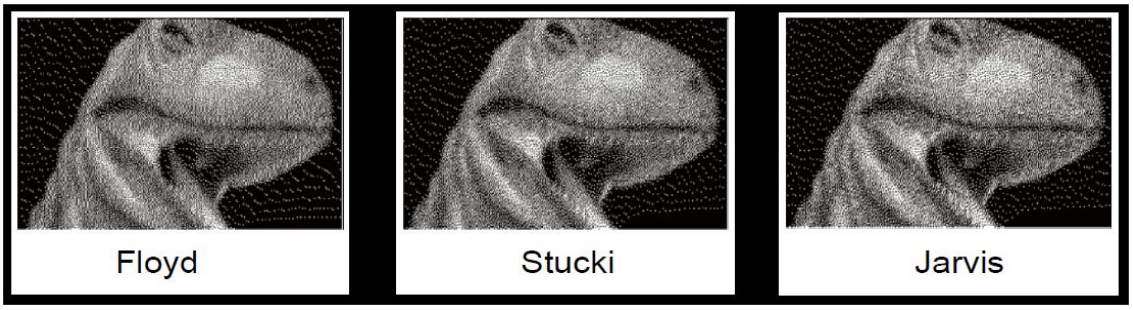


Tip

There is no “correct” or “best” setting when using the Raster options. The most appropriate settings will be based on a variety of factors: your design, the material you are engraving on, and the results you wish to achieve, etc. Please take some time to experiment with the multitude of raster options to get the one you feel is the best for your piece. This is where much of the fun in engraving is…. experimentation!

5.2.3.7 Piolas series Printer Driver – Stamp Page

Producing stamps require different operational steps than your standard engraving or cutting jobs. The Stamp page offers dynamic options allowing you to customize your stamp production process.

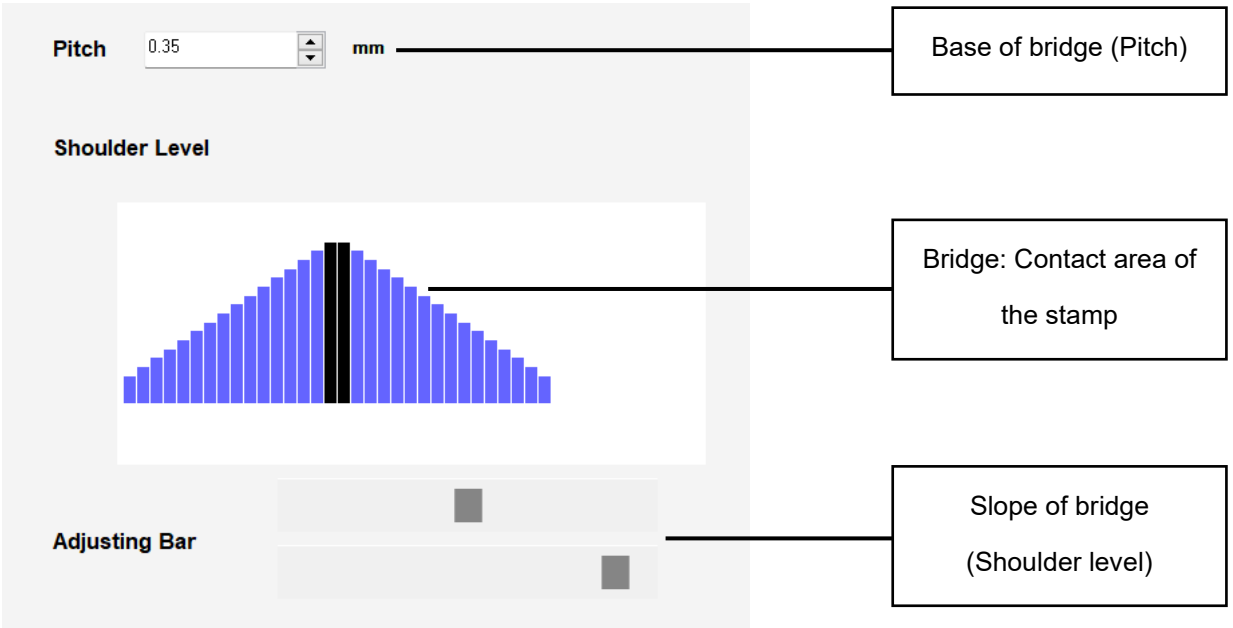

NOTE

The Stamp page will only appear and be accessible when you have selected the Stamp Mode from the Options Page.

Tip

Functions located on the other pages that are useful when making a stamp: Set Shoulder, Pitch, Border, Invert, and Mirror.

Pitch (Stamp Page)

Your stamp will be a reversed image composed of engraved depressions and ridges. Think of these ridges as the “contact sections” of the stamp. If the ridges of these contact sections are too thin, they may break. The Pitch setting allows you to increase the width of the ridge base, hence creating more stable “contact sections” and longer lasting stamp. The pitch value setting allows you to adjust the base width of the ridge. Broad pitch gives the maximum amount of support for each ridge. Experiment with different pitch value settings in order to produce the stamp that is best suited for your application.

Adjustment Bar/ Power Level (Stamp Page)

Another important aspect of creating a stamp is setting the slope level of the shoulder. The shoulder is the section from the “contact section” of the stamp to its base. This function allows you to adjust the slope for the shoulder sections of your stamp. By sliding the sliders or directly input of power level, you will be able to change the slope of the shoulder.

NOTE

The visual representations of the Pitch and Shoulder Level in the Piolas series driver are an exaggerated representation to allow for easy visual guidance and precise input. Remember we are working with distances less than 1 mm here.

Chapter 6
Setup and Installation

- Raster Engraving
- Vector Cutting
- Vector and Raster
- 3D Tips
- Modify Image Settings of Picture for Better Engraving Quality

6.1 Raster Engraving

A CO2 laser engraver can process text, scanned image, digital picture, or design by “laser firing” grids /dots of individual pixels into a raster image. Think of this as simply “printing” your job onto any particular material. An example of a raster engraved piece would be a photo engraving on tile, as shown in the picture below.



6.2 Vector Cutting

A CO2 laser engraver can process text, design, and images composed of lines through continuous-firing of the laser to cut out various shapes. When performing vector cutting operations, imagine the laser head as a pair of scissors cutting out the lines specified in your design. An example of a vector cut piece would be a customized dining mat, as shown in the picture below.



The Piolas series Printer Driver determines which sections should be raster engraved or vector cut based on the outline width of that particular area or section of the design. In order to prep a particular section for vector cutting, you will need to set that object's fill color to white and set its outline thickness between 0.001" (0.025 mm) to 0.004" (0.1 mm) via the graphics software.

Below is an example of how to prep an area (in this case, we will use a section of text) for vector cutting. CorelDRAW will be used as the selected graphics software.

1) With the text function, create a string of characters and select those characters by clicking on the text.
2) Change the text fill color of the selected characters to white by left clicking on the white color from the CorelDRAW Color Palette (located on the right hand side of the screen)
3) Change the outline color of the selected characters outline by right clicking on the desired color from the CorelDRAW Color Palette.
4) Change the selected characters outline thickness to the thinnest width by right clicking on the selected text select <Properties> → Click on the <Outline> tab and change the Width to its thinnest dimension. Click on "OK" to apply the changes.
5) Now your string of characters has been properly designated as an area to be vector cut. Simply "print" your job (output the file to the Piolas) and watch as your string of characters is vector cut.

6.3 Vector and Raster

In some cases, you will want to process both raster engraving and vector cutting tasks within a single project. For example, if you wanted to engrave a design onto a particular material and then cut a particular shape around that engraving. The picture below is an example of engraving on a piece of leather which has then been cut out: The picture below is an example of an engraving on a piece of cork, which has then been cut out with a square shape:



In these situations when there are raster engraving and vector cutting operations on a single project, the LaserPro Piolas series driver will interpret between raster sections and vector sections by the types of lines and line widths of your design. Areas of your design with line widths set between 0.001" (0.025 mm), 0.004" (0.1 mm) will be designated for vector cutting, and the other areas will be designated for raster engraving.


6.4 3D Tips

3D Mode is one of the functions of GCC CO2 laser engraver. Instead of traditional two-dimensional graphic processing, 3D Mode allows the naked eyes to visualize the curvatures of the 3D effect by applying 200 power levels technology to create different depth of engraving. Although it is easy to produce 3D samples with LaserPro Engraver, production of the 3D graphic can be a hassle for our users.

Principle for 3D production by laser

3D processing uses degrees of the gray level to adjust the output energy of the laser. Take the figures below as an example. When the color of a certain block is set as 100% black, the laser output energy for processing will be at 100%. The processing depth will be fairly deep. When the gray level is set as 50% black, the laser output energy will be adjusted to a smaller value accordingly so that the processing depth is not as deep.

By specifying the degrees of the gray level in this way, various energy output is achieved and the 3D effects are produced.

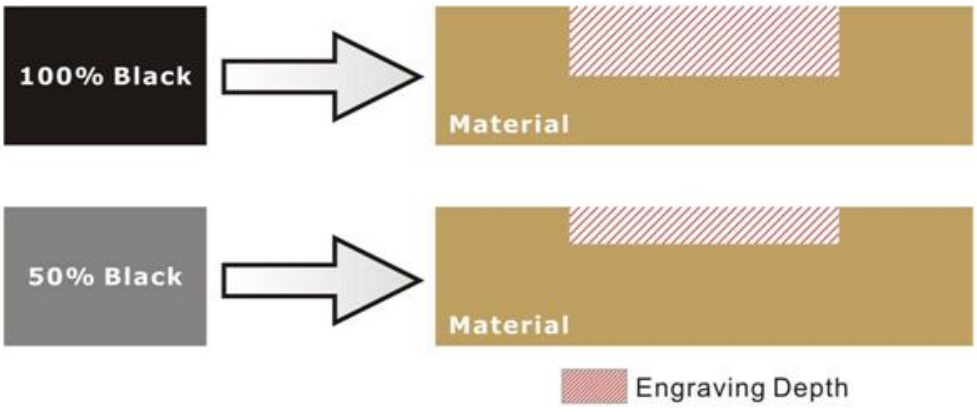

By specifying different levels of black in design software, the corresponding laser power energy will generate different depths of engraving result.


Introduction to software for 3D graphic production

Many ways to produce 3D graphics are available. If you are familiar with or frequently use one of the 3D software in the market like Laser Type, EngraveLab, 3D Studio etc., you may use it for the production of 3D graphics. After completion, save the 3D images as one of the formats that is compatible with the Laser Engraver (such as JPG or BMP) and let the machine begin the engraving. If you are not familiar with any 3D software, some editing software specific for laser in the market an o have 3D mode functionality, which could be a handy tool for you to produce 3D objects. Of course, you may also use Photoshop or CorelDRAW, which you might be using on daily basis, for the production of 3D objects. Ways to produce 3D graphics with this software are not the same. In the following section, we will give you simple illustrations with respect to how this software works.

Laser Professional AP

Currently, quite few laser professional application softwares like Laser Type, 3D studio, EngraveLab are available in the market. You can not only create all kinds of vector images with these AP but a o convert these vector images into 3D module, which is a great way to produce 3D graphics.

As illustrated in the figure below, all you need to do is to choose the direction of the vector and then set the length and shape of the convex or concave surface. The software will automatically generate the 3D graphic for you.

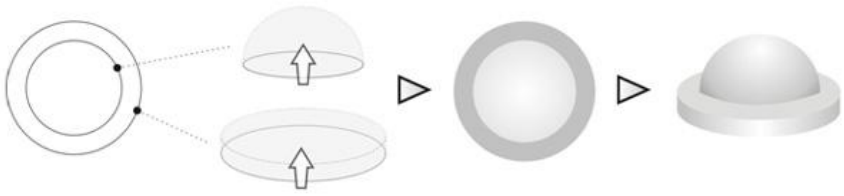


Concept illustration of 3D graphic production with Laser Professional AP

After the graphic is completed, you can output the 3D graphic directly to the laser machine through GCC LaserPro driver, which is very handy. Or you can export the 3D graphics as JPG or BMP format and edit with frequently used CorelDRAW or Illustrator software, then output the graphic to GCC laser system.

Photoshop & CorelDRAW

The way to produce 3D graphics with Photoshop and CorelDRAW is very similar. Fill in the desired gray level colors to each of the drawn figures, and proceed with further arrangement and combination. Then you may output the 3D graphic to the laser for the production of the 3D object. Take the figure below as an example. After producing two graphs in gray level, proceed with the arrangement and combination. Then you may let the laser proceed with 3D mode.

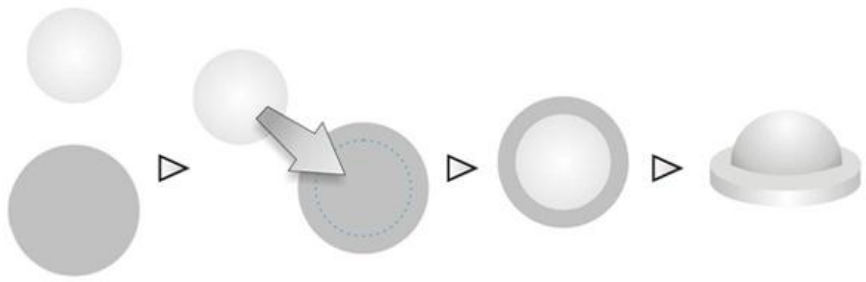


Both Photoshop and CorelDRAW may produce 3D graphics in the manner of combinatio

A way to produce 3D graphics


For the production of 3D graphics, in addition to the requirement of having great familiarity with the software, a significant amount of time is required to design and arrange the layout. Thus, we use a relatively simple graphic for illustration so that you would understand how to produce 3D graphics better.

Take the graphic above as a production example. CorelDRAW is used for the production of the 3D graphic.


Step 1. Produce the gray level background

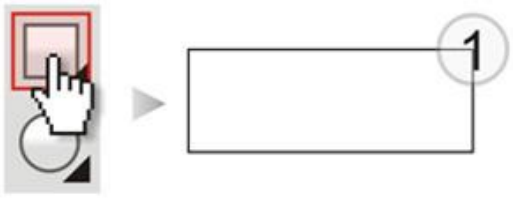


▲Draw a rectangular box with the drawing tool

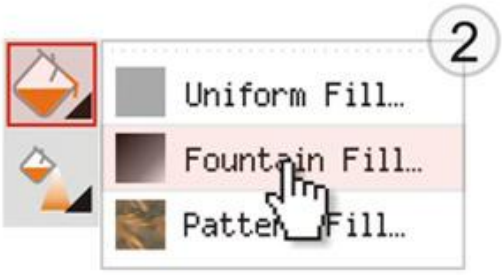


▲Select Fountain Fill to fill in the gray level

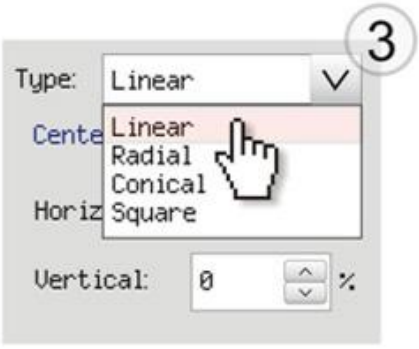


▲Select Linear as the type of the gray level

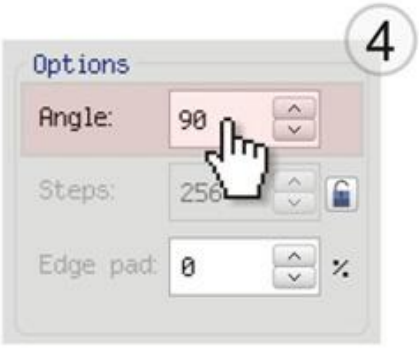

▲Set the gray level angle as 90 degrees

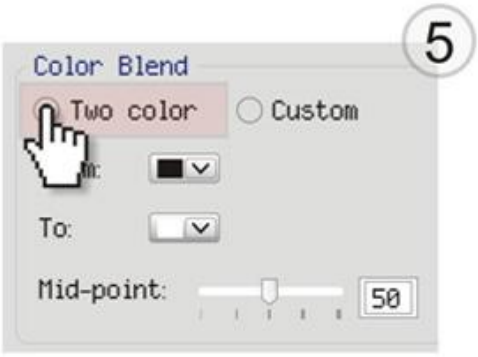


▲Select Two color as the type of the gray level

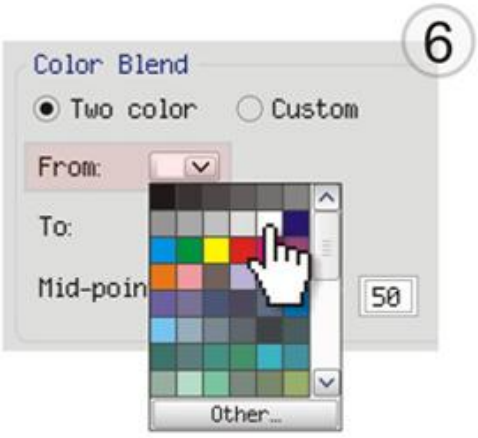

▲Set the From color as 0% Black



▲Set the To color as 100% Black

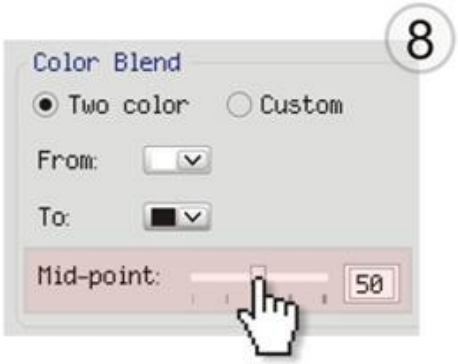

▲Set the Mid-point as 30




▲Click OK to complete the editing



▲A gray level graphic is finished

NOTE

If you need to produce circular 3D graphics, you only need to select Radial as the gray level type in the pull-down menu of Type. Then, a circular 3D graphic may be produced.

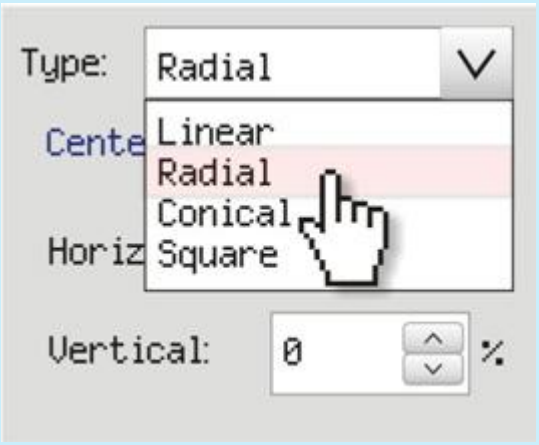

Step 2. Produce three-dimensional characters



▲Edit the word with the Text toolbox




▲Use the Color toolbox on the right to fill the white color into the characters




▲Select the desired font and size



▲**Bold** and *italic* style may also be used

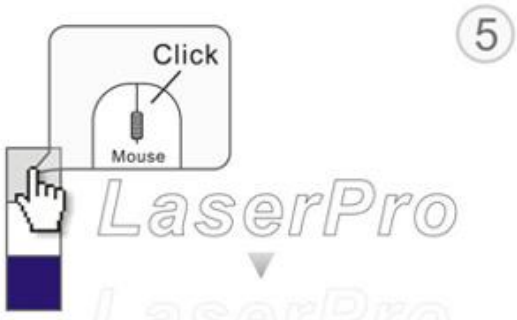

▲On the palette, set the exterior frame as 10% gray level (Right click the mouse to set the color of the line for the exterior frame quickly)

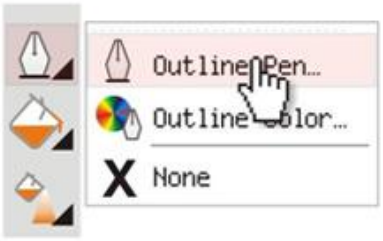

▲Click on the Outline Pen tool



▲Set the width of the line for the exterior frame



▲Check the Behind Fill option



▲Click OK to complete the text editing



▲Three-dimensional characters are completed

Step 3. Edit the characters for the website



▲Edit the word with the Text toolbox

▲Select the desired font and size


Step 4. Combine the 3D images

After finishing the production for each of the objects, you may proceed with the combination of the objects. The combined graphic may be output with the laser engraver.



Output the 3D graphic

After selecting the graphic to be output, set the Mode as 3D Mode in the driver. After setting the engraving parameters, output the 3D graphic.



Tips for engraving 3D graphics

LaserPro Application Lab provides a few reminders that may require your attention during the 3D engraving in order to improve the result of the engraving.

Turn on the Air Assist function

When the engraving is done along with Air Assist, the depth of the engraving would be deeper. Set Air assist inside the driver by checking the box.



Polish

Dust will accumulate during the engraving when acrylic is engraved. The acrylic can be polished after the engraving. After the processing, don't remove the engraved object. Use the Touch Screen to lower the platform (for about 7~8 mm) and then engrave once again to achieve the better finish.



After engraving the wooden objects, please use a toothbrush with some clean water to remove the dust on top of the object.




▲ Before cleaning




▲ After cleaning

6.5 Modify Image Settings of Picture for Better Engraving Quality


1. Import a picture into CorelDRAW.
2. Convert the image to Bitmap by selecting the image and click on Bitmaps/Convert to Bitmap

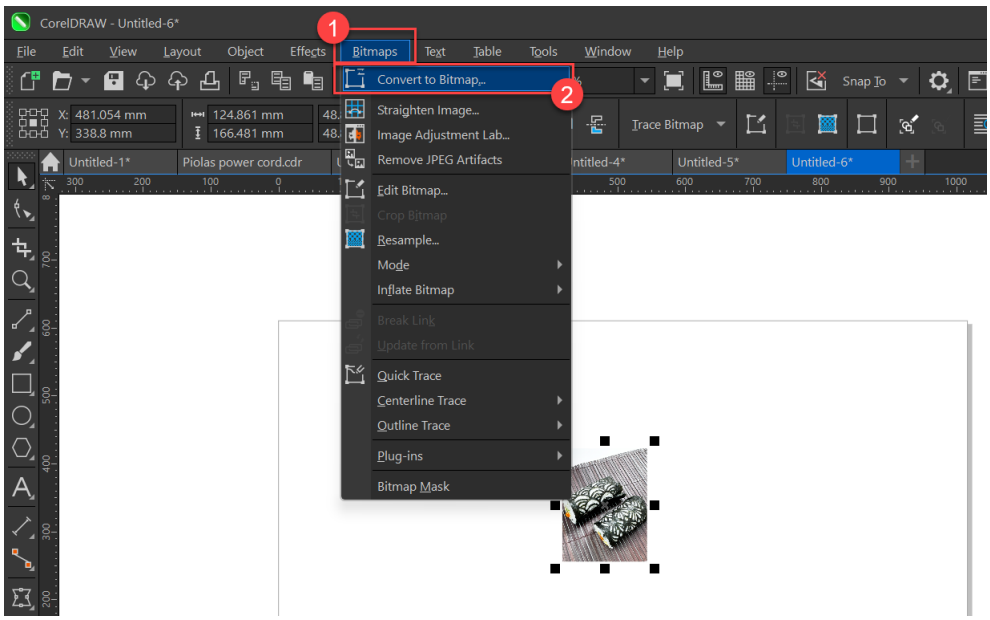


3. Change the Bitmap settings by setting “Color” to Grayscale (8-bit) and “Resolution” to 300 dpi and click OK.

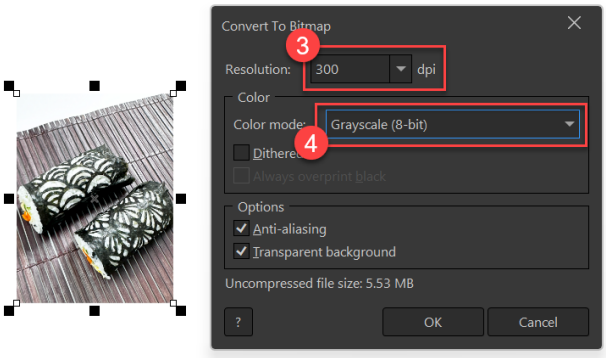

4. Finally, Invert the image by selecting Effects/Transform/Invert

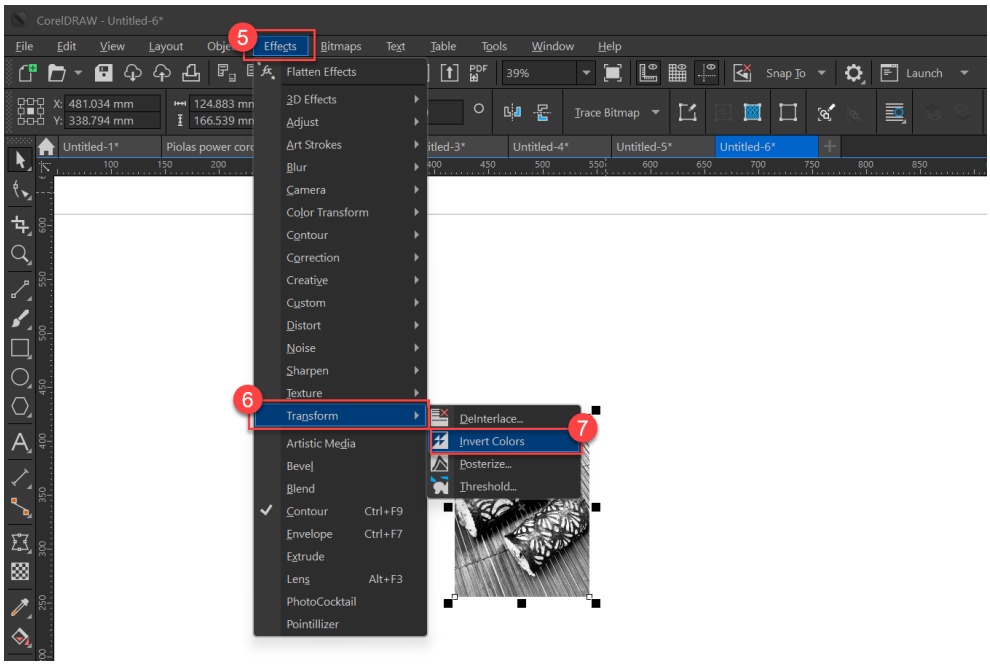

5. Now you are ready to output the modified image by clicking File/Print

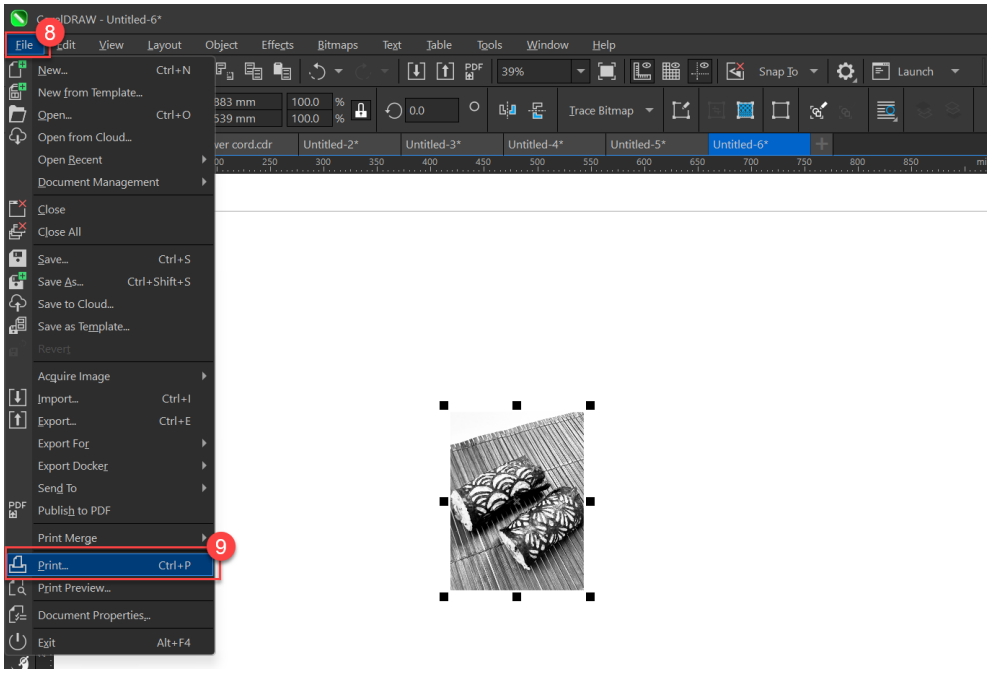

NOTE

This instruction is a simple example for general use. There are many tips and tricks to achieve a good engraving quality. It takes a lot of practice and experience to achieve a good engraving quality. Different picture may need different modifications and different material may need different parameters.

Chapter 7
Optional Items

- Raster Engraving
- Vector Cutting
- Vector and Raster
- 3D Tips
- Modify Image Settings of Picture for Better Engraving Quality

Several optional items are available to enhance your experience with the Piolas series system. If, at any time after purchasing your Piolas series, you consider purchasing any optional items, please contact your local authorized GCC distributor.

7.1 Fume Extraction Unit

To properly remove dust, vaporized material and chemical smoke from the working area and machine, it is necessary to install a suitable air extraction system. The air extraction system and other components are readily available from your local authorized GCC distributor, or you can elect to purchase and install one yourself with components found at your local industrial supply store.

LaserPro's Fume Extraction Units are specifically designed to prevent personnel from inhaling hazardous fumes and dust generated by the laser process. Available for all LaserPro engravers, the LaserPro Fume Extraction Unit represents the latest in exhaust extraction and odor reduction technology for all types of applications. Quiet operation, high vacuum capacity, compact design and long-life expectancy are but a few outstanding features. Each LaserPro Fume Extraction Unit is powered by a maintenance-free, continuous-running turbine. In order to ensure personnel safety and legal compliance, the LaserPro Fume Extraction Unit is CE-compliant for Europe. To purchase a LaserPro Fume Extraction Unit, contact your local authorized GCC distributor.

INSTALLATION (Self-Assembled Unit):

1) If you purchase an exhaust system at your local industrial supply store, we suggest that you have a contractor install the exhaust system. We highly recommend you install the exhaust system outside of the building for both noise considerations and if it does not possess filtering capabilities.

2) Mount the fume ventilation system in an obvious and accessible location, not too far from the GCC LaserPro machines, so it can be routinely switched on prior to laser engraving. The maximal distance you should mount the exhaust system away from the Piolas series depends on the blower’s vacuum capacity. We recommend that you consult with the vendor regarding the unit’s vacuum force, maximal distances, based on the available mode.

3) Connect rigid and smooth walled tubing such as PVC or sheet metal with a 4” diameter to the ventilation opening located on the rear side of GCC LaserPro machines. (As shown in the picture below). Try to keep this tubing as straight as possible as bends reduce the exhaust efficiency. Use the appropriately sized tube clamps and sealants to ensure a tight and secure

attachment.

4) There are two exhaust openings on the rear side of GCC LaserPro machines, you can connect the top or bottom one, or both for application requirements. The top ductwork is suitable for dust, smoke generated on material surface when doing laser engraving, which will reduce residue left on material surface; while the bottom ductwork is recommended for laser cutting jobs. Optimum down vacuum is critical for clear cutting edge when laser cutting material.


4” Ventilation Opening



5” Ventilation Opening


NOTE

1. The bottom ventilation opening is 5” when the machine shipped. You can find a 4” ventilation opening in the accessory box.
2. The bottom ventilation opening is designed to be removable, allowing for the connection of two fume extraction units. This configuration provides significantly enhanced suction for more efficient fume removal.

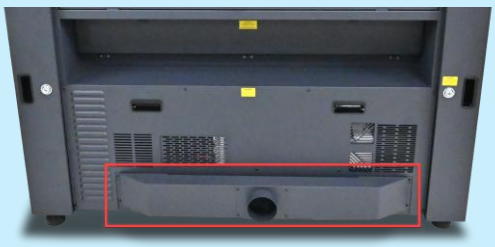


7.2 Air Compressor

Specifically designed for laser engravers, the air compressor utilizes an oil-free diaphragm. The air compressor helps to eliminate harmful and potentially damaging moisture from the laser optics, maximizing life of the laser optics. In addition, the air compressor provides an optimal airflow to the SmartAIR nozzles to minimize flaming, suppress working temperatures, and blow away dust and particle by products generated from the laser process. GCC LaserPro Piolas series provides an air control by pen color function in Windows driver to enable or disable air assist automatically per different pen jobs. Refer to Chapter 5.3.3.2 about driver operation in pen page.

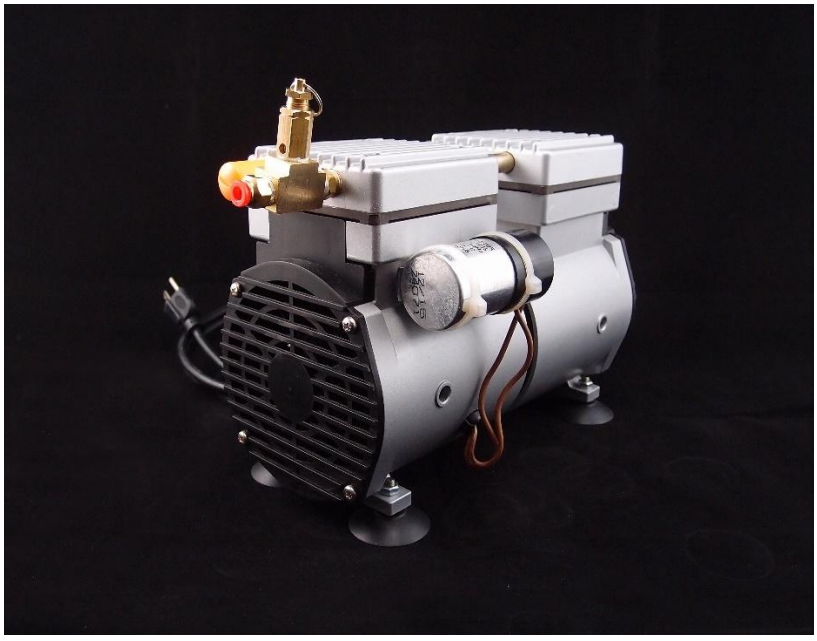

INSTALLATION:

1) Install the air filter to the air inlet of the compressor and install the pressure relief valve to the air outlet of the compressor.

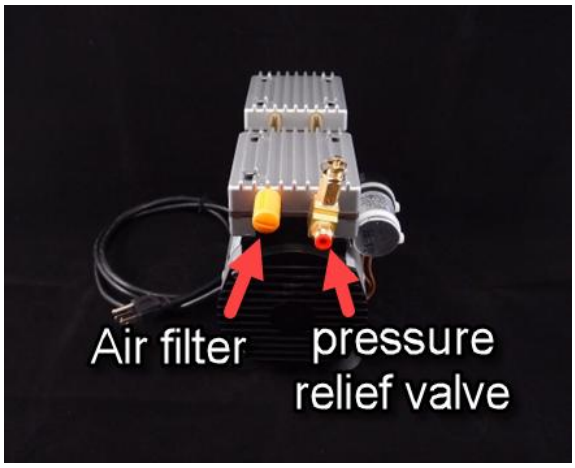

2) Connect a 1/4" tubing to the pressure relief valve of the compressor.

> **NOTE**
>
> It is important that the 1/4" air tubing has clean, straight cuts on each end. Jagged or slanted cuts will not produce adequate sealing capabilities.

3) Plug the air compressor's power cord into the "For Air Compressor" power socket.

4) Plug the female end of power cord to the power cord B socket.




5) Take the unattached end of the 1/4" air tubing (other end already connected to air compressor) and connect it to the air tube connector on the air assist valve. Make sure you press down on the air tube fastener when inserting the 1/4" air tubing, to form a tight, secure attachment as indicated in the diagram below.



6) Congratulations, you have finished setting up the air compressor. Make sure you have the proper SmartAIR nozzle installed (depending on your application), before you turn on and utilize the air compressor.

Air Flow Regulator:

- Turn clockwise to increase airflow
- Turn counterclockwise to decrease airflow

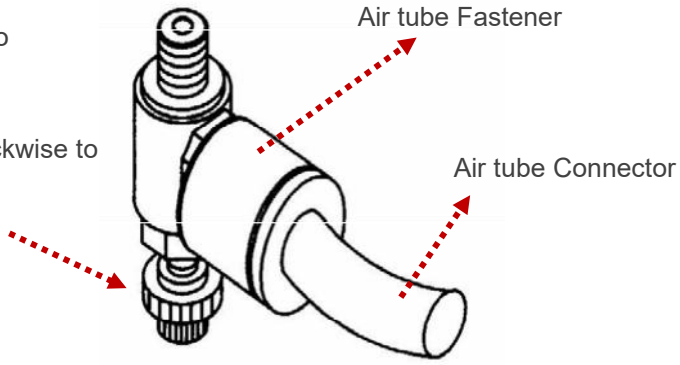

OPERATION:

Switch on the air compressor unit and make sure that the airflow regulator on the air assist value is opened (turn clockwise to increase the airflow, counterclockwise to decrease the airflow). The air nozzle under the laser head should emit a steady flow of air.

With the SmartAIR nozzle and air compressor properly installed and operating, all configurations and settings relating to air-assist functions are controlled through the LaserPro Piolas series printer driver and hardware control panel. Please refer to chapter 5.3.3.2 Pen page on printer driver section of this manual for detail on how to enable and configure air-assist functionally.



7.3 Focus Lens Options

7.3.1 CO2 Laser Focus Lens

GCC offers five different focal lenses namely the 1.5”, 2.0”, 2.5”, 3.0”, and 4.0” for different applications. The number description, 1.5”, 2.0”, 2.5”, 3.0” and 4.0” signifies the distance of where passed through beam will converge. For example, when a laser beam passes through a 2.0” focus lens, the beam will converge at a 2.0” distance resulting in a concentration of energy at that spot.


The resulting spot size from the different focus lens are also different and the following chart shows the different spot sizes achieved from the different lenses.

- 1.5” Lens: Best suited for engraving very fine details.
- 2.0” & 2.5“ Lens: Ideal for normal engraving and cutting acrylic up to 10mm thick.
- 3.0” & 4.0” Lens: Suitable for cutting acrylic 10mm thick and above.


 Lens	 Spot Size
1.5”	0.045 ~ 0.051 mm (0.0018” ~ 0.0020”)
2.0”	0.059 ~ 0.068 mm (0.0023” ~ 0.0027”)
2.5”	0.074 ~ 0.085 mm (0.0029” ~ 0.0033”)
3.0”	0.089 ~ 0.101 mm (0.0035” ~ 0.0040”)
4.0”	0.118 ~ 0.135 mm (0.0046” ~ 0.0053”)

Change a different focal lens


1) Unscrew the thumb screw on the left side of the lens carriage.

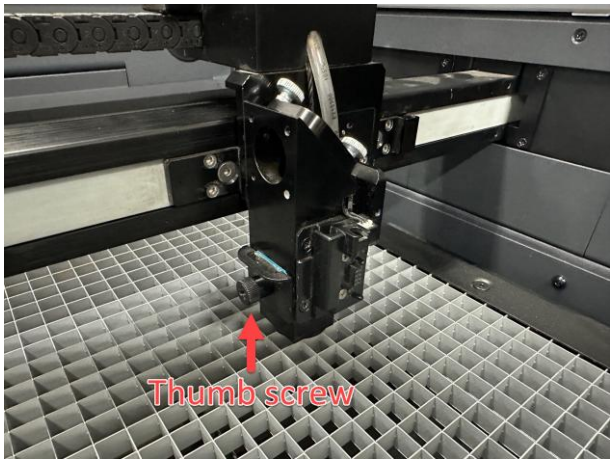

2) Remove the focal lens.

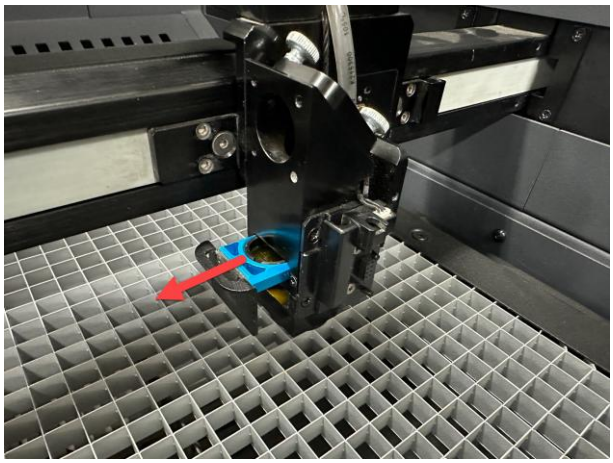


3) Insert the new focal lens and tighten the thumb screw.

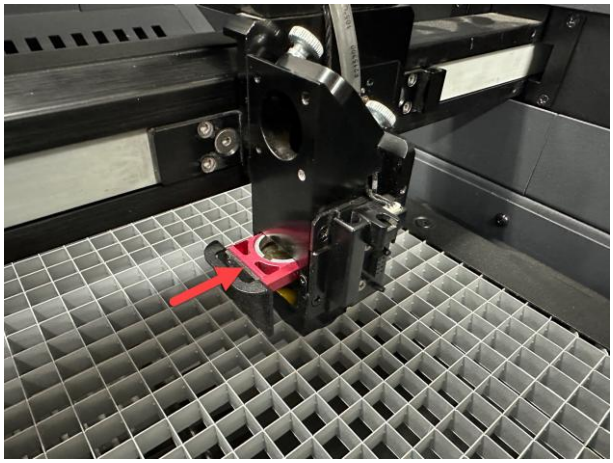

Engraving effects achieved with the different lenses



Cutting edges achieved with the different lenses

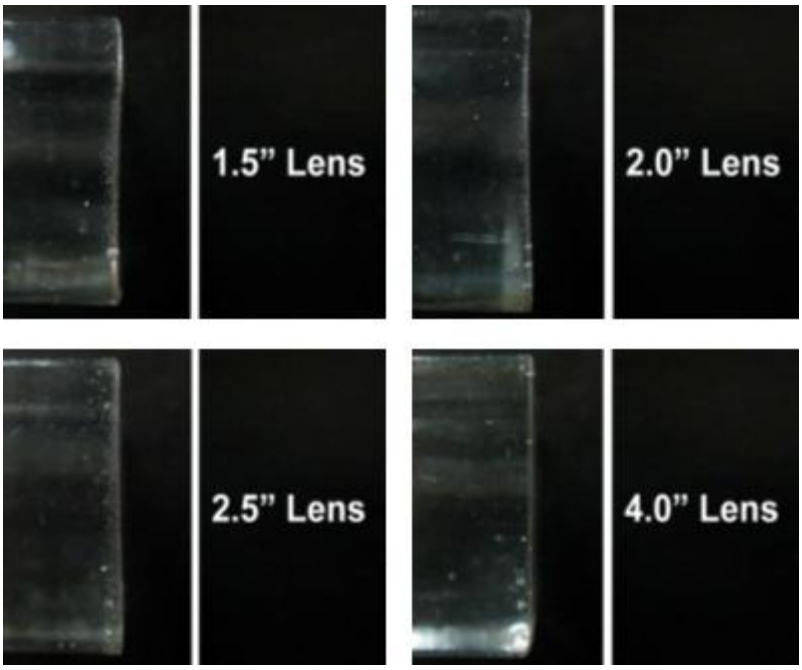

7.4 Pass-Through Door Options




GCC Piolas laser systems are designed to be Class 2 (US: Class II) safety requirement, the laser would stop firing if any door open during operation to protect operator safety. For users installed optional Pass-Through Door switch module, GCC laser system will be converted to Class 4 (US: Class IV) safety machine, operators must follow the safety notice stated in Chapter 1.5 of this manual.


7.4.1 How to Install Pass-Through Door Switch Option

Step 1. Open the top window of laser machine then lower down the working table of laser system to the bottom.

Step 2. Locate the Pass-Through Door switch key connector at the top-right corner of machine chassis.

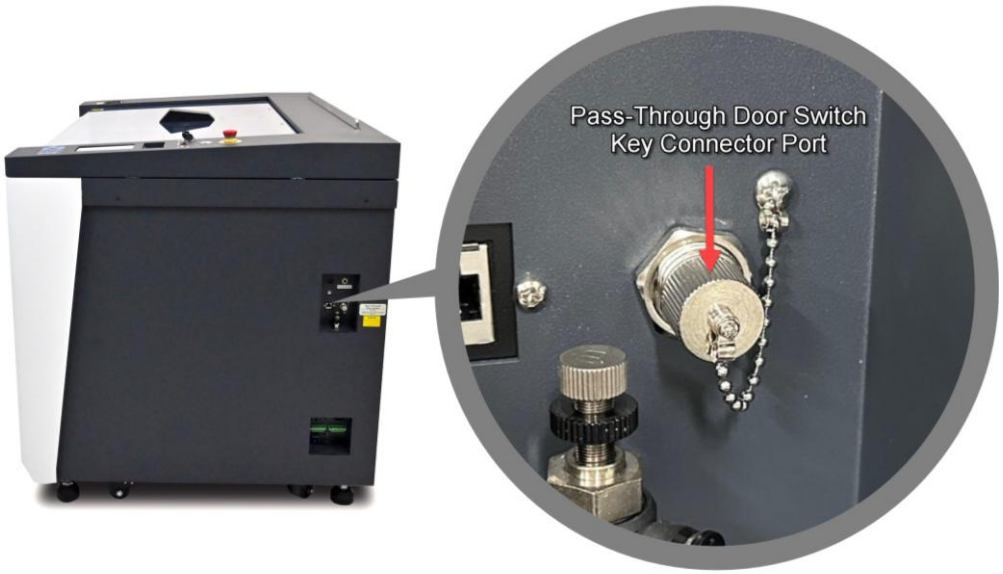

Step 3. Unscrew the port cover and plug the Pass-Through Door switch key into the female connector.

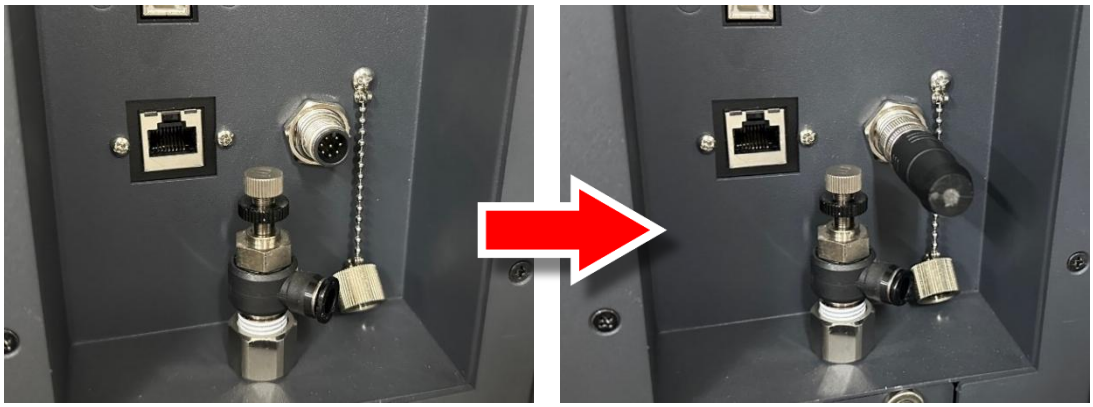


Step 4. Locate the external signal connector on the right side of laser system and plug the warning light to this port. Put the warning light on top of laser machine with high visibility as class 4 (US: class IV) safety requirement.



Step 5. The installation is completed.

7.4.2 Connect with an External Remote Interlock

If you wish to connect an external remote interlock, please consult the following diagram to complete the setup.

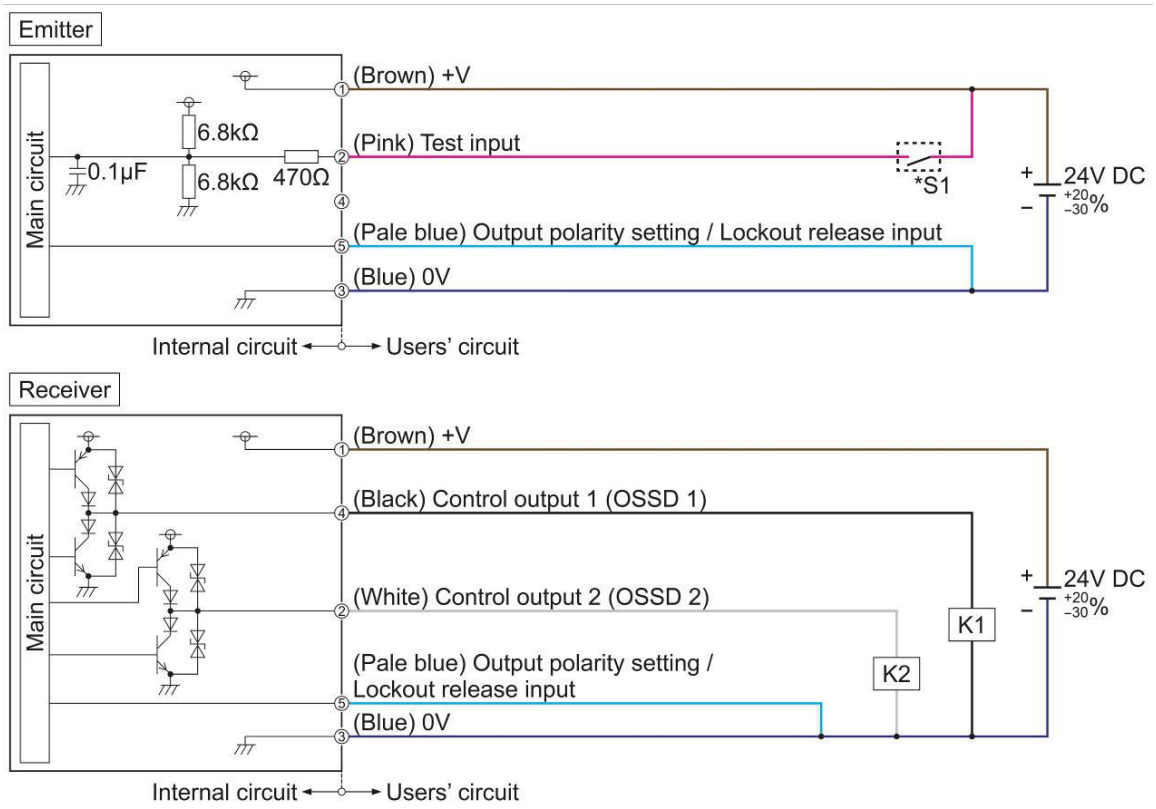

7.5 Honeycomb Table / Down Vacuum Engraving Table


The GCC LaserPro Piolas series is equipped with an aluminum grid cutting table. If you are considering purchasing a honeycomb table or down vacuum engraving table for different applications, please contact your local authorized GCC distributor.

Table Switch


All tables use the same method to attach to the machine. Please refer to the following instructions to change the table.

1) Open the front pass-through door and lower the working table to the lowest possible position through the control panel.

2) The Piolas series utilizes two quick keys located at the bottom left and top right of the working table to attach the table on the SmartBOX.

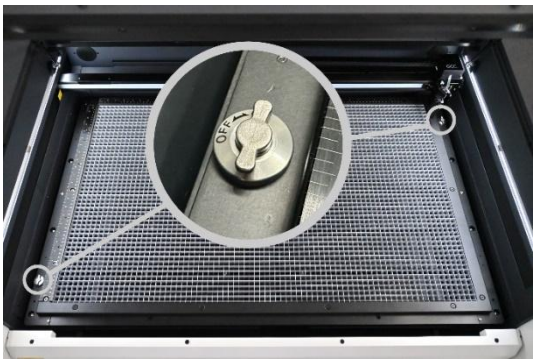


3) Rotate the two quick keys to the "OFF" position.

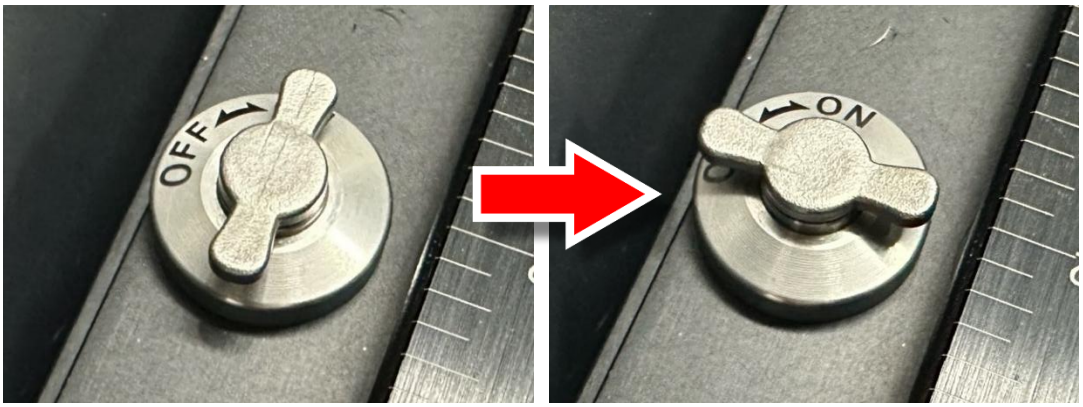

4) Move the table out and put a different table into the machine.



5) Ensure the table is correctly placed on the SmartBOX, then rotate the two quick keys to the "ON" position.

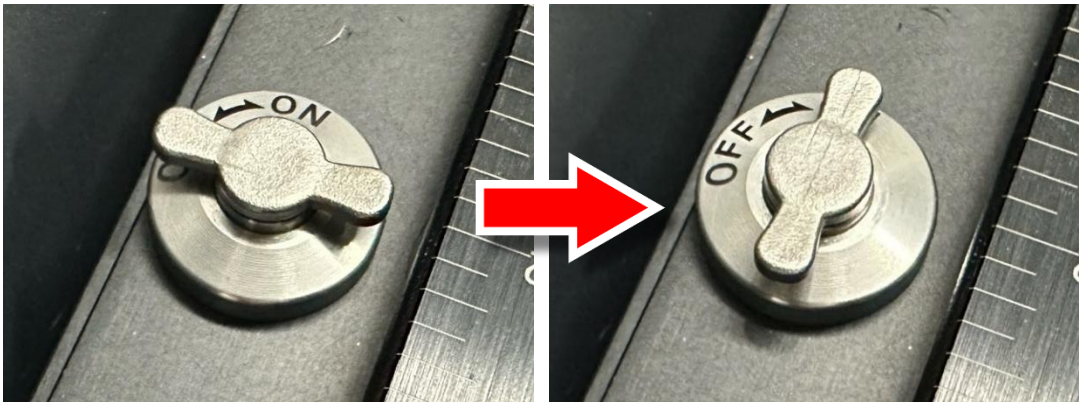

6) The table switch is completed.


7.6 SmartVISION Elite CCD

The SmartVISION Elite CCD enables you to read registration marks and achieve precise cutting, making it ideal for print-and-cut applications.


Installation:

1) Turn off the power of the machine.
2) Take out the SmartVISION Elite CCD from the package.
3) Slide the SmartVISION Elite CCD to the right side of the lens carriage.



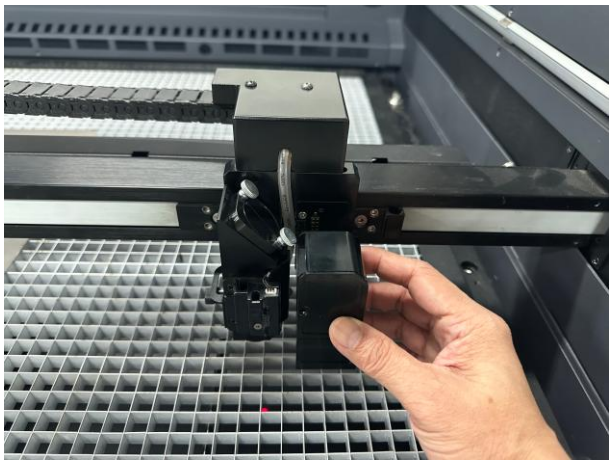

4) Tight the thumb screw to fix it.

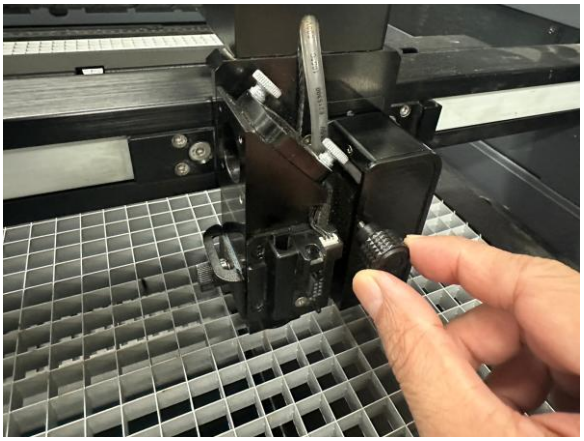

5) Connect the USB cable between laser machine and computer/laptop.



6) The installation is completed.

Convert file to the **PRN** format:

Please refer to chapter 4.1.3 to get more information about convert file to the PRN format.

Operation:


1) Please go to the **Down Area** from the www.GCCworld.com to download the GCC SmartCONTROL software.

2) Install it to your computer/laptop and run it.


3) The below message serves as a reminder: if you send files simultaneously via SmartCONTROL and different drawing software (such as CorelDRAW or Illustrator), it can lead to unexpected issues. Please remember to close SmartCONTROL before sending files from other drawing software. Click OK button to close the window.




4) The Welcome window will appear, please click “New File” to continue.

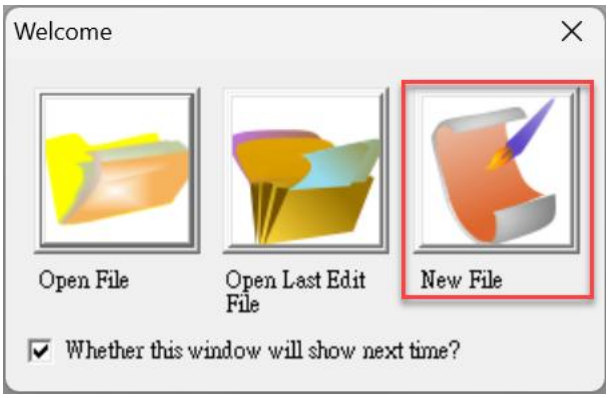


5) Go to Output → Processed Condition Setup… to set a correct model that you use.

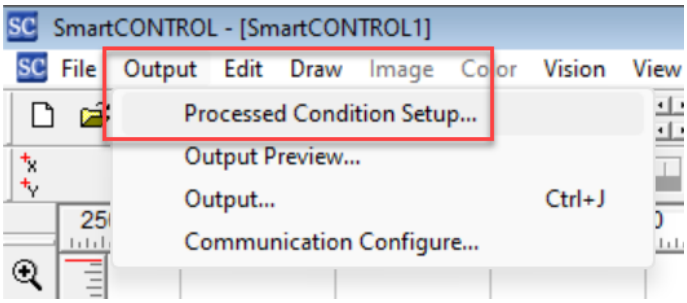


6) Select “Piolas 280 / 400 / 400SE” from the drop-down menu of the machine model and click OK,

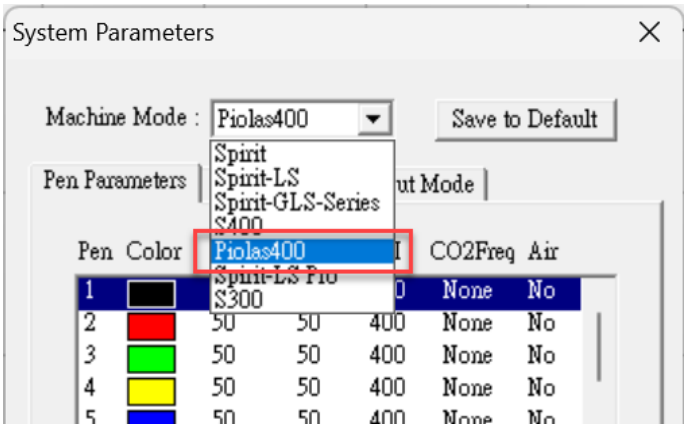

7) Click File → Import… to import a file to SmartCONTROL.

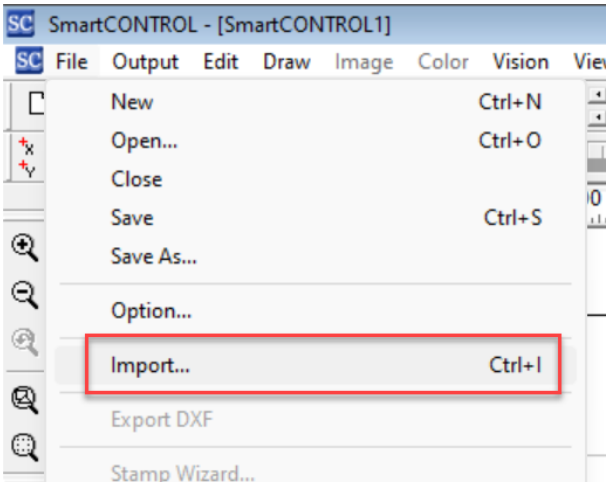


8) After importing the file, you will see some X symbols in SmartCONTROL, which indicate registration marks. If the file lacks these X symbols, it means it doesn't have registration marks and cannot be used with SmartVISION Elite CCD.

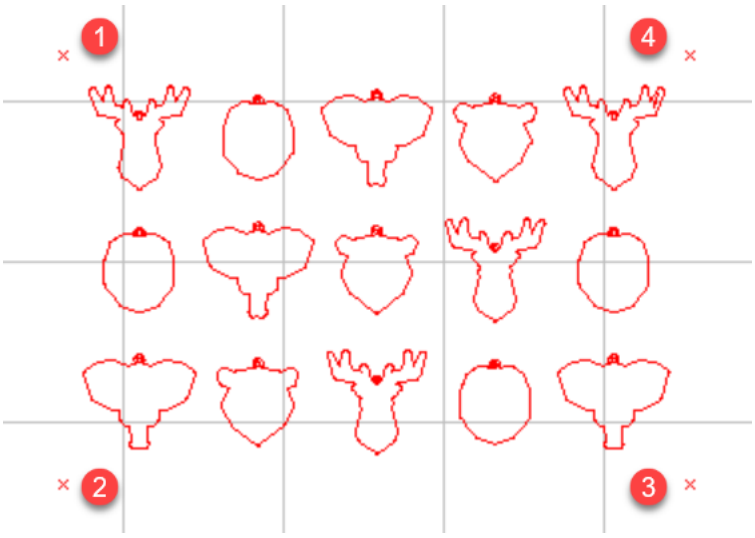


9) Place the printed media on the working table.


10) Go to <Vision> → <SmartCONTROL Vision> to open the SmartCONTROL window.

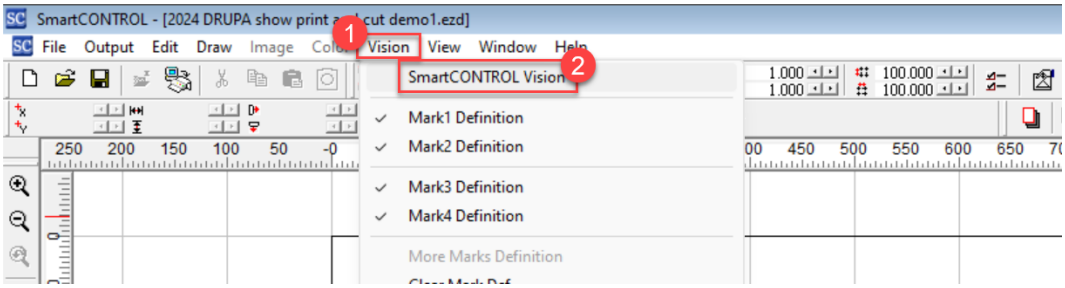

11) Move the SmartVISION Elite CCD near the first mark by hand and ensure that the SmartVISION Elite CCD can cover the entire mark in the FOV (Field of View) window. If you cannot see the mark, please use the arrow keys of **ROI Moving** to move the SmartVISION Elite CCD accordingly.

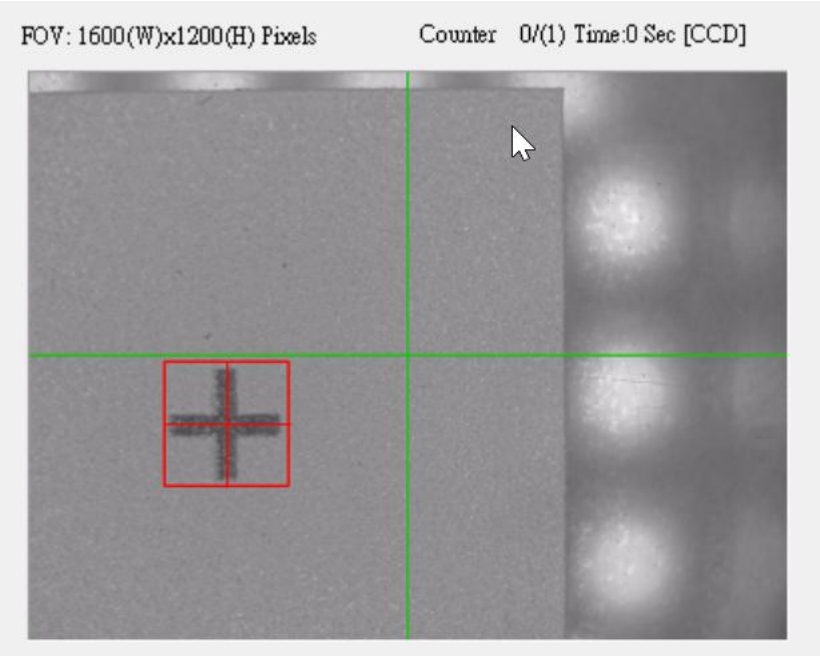


12) Click the <Mark Learning> tab and select a mark mode from the drop-down menu. Then set the read size based on the size of the mark.

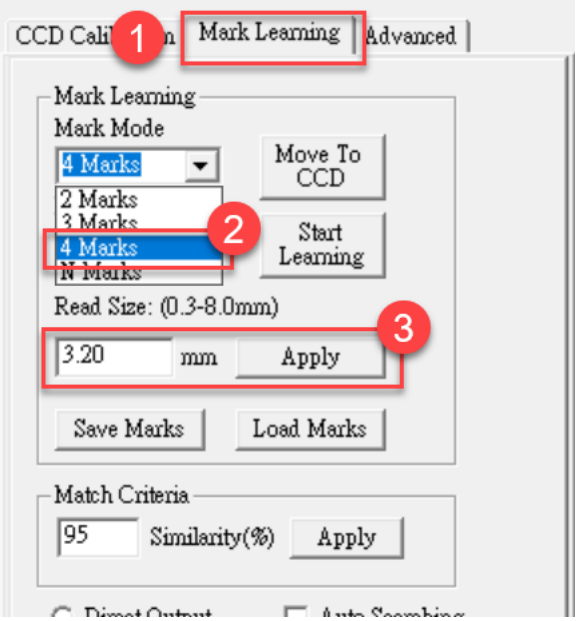


13) Move the Learn ROI (green frame) to the center of the mark and click the **Starting Learning** button to lean the mark.


14) After learning the mark, it will appear a message to remind you that all marks have been learned.

15) Go to <Output> → <Processed Condition Setup…> to set the process parameters.

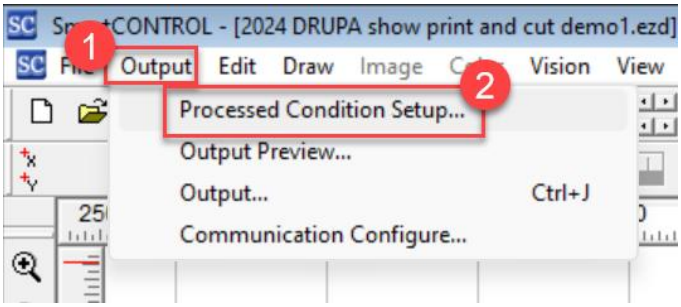

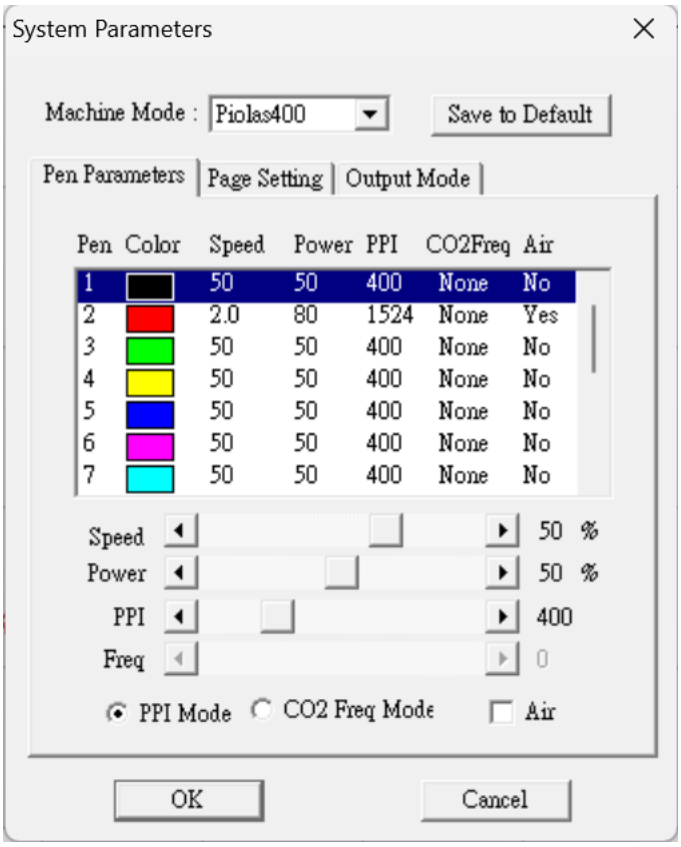

16) After setting the process parameters, please go to <Output> → <Ouput…> to open the output window.

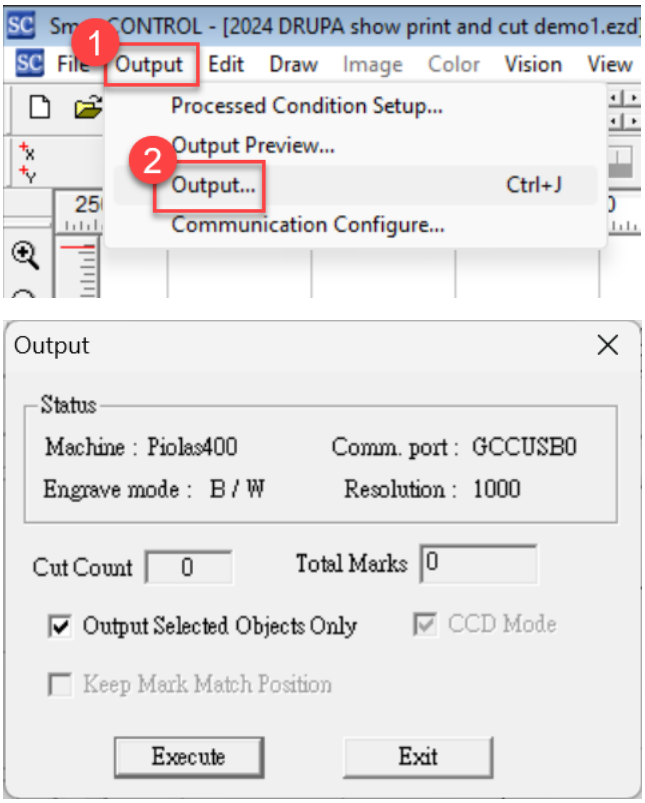

17) Click the **Execute** button to run the job.

18) For more information about SmartCONTROL's special functions or operations, please visit the **<Support>** → **<Downloads>** section at www.GCCworld.com to download the SmartCONTROL user manual.

7.7 Rotary Attachment (Coming soon)

7.8 SmartGUARD Fire Alarm Option (Coming soon)

Chapter 8
Basic Maintenance

- Suggested Cleaning and Maintenance Supplies
- Maintaining the Work table and Motion System
- Cleaning the Exhaust Duct

Keeping your LaserPro Piolas series clean and well maintained will ensure quality output, consistent reliability, and extended product life. Smoke, dust or residue build-up inside the laser system or the mechanical components can cause a reduction in the laser power, irregularities in the motion system, reduced product life cycle, and a host of other avoidable problems. This section will cover how to perform regular maintenance on the work table, motion system, mirrors, and focal lens.

The frequency of the cleaning schedule will depend on number of variables such as the types of material you work with, the immediate work environment, the frequency of use, the quality of the exhaust system, etc.

WARNING!

Always turn off and unplug the Piolas machine before cleaning to avoid electrical shock and potential damage.

8.1 Suggested Cleaning and Maintenance Supplies

Cleaning / Maintenance Tool	Special notes
Soap Solution or All-Purpose Cleaner	
Paper Towel	
Cotton Cloth	
Denatured Alcohol	DO NOT use alcohol on any painted surface, plastic, or the laser system.
Acetone	ONLY to be used on the work table
Vacuum Cleaner with a Flexible Nozzle	Only to be used in and around the work table and motion system
Lubrication syringe	This product does not include lubricant. Please refer to the recommended list below for suitable options available at your local store.
Cotton Swabs	Supplied
Lens Cleaner	Please refer to the recommended list below for suitable options available at your local store.
Lint Free Lens Tissue	Supplied
#2 Phillips Screwdriver	
Allen Wrench .050”	

Due to maritime safety concerns, lens cleaning fluid and lubricating grease are no longer included in the accessory box. Please refer to the following chart to purchase recommended lens cleaner and lubricating grease for the maintenance.

These items can be purchased separately via Amazon, online retailers, or local authorized distributors.

WARNING!

Using unverified or low-quality cleaning fluid or grease may cause damage or reduce the machine's performance.

Recommended Lens Cleaners

Product		Applicable Models	Information
	Tiffen Lens Cleaner	All laser machines	Tiffen Lens Cleaner
	Eclipse Optic Cleaning Fluid	All laser machines	Eclipse Optic Cleaning Fluid
	CURA CLC-300	All laser machines	CURA CLC-300
	ROR Lens Cleaner	All laser machines	ROR Lens Cleaner
	VSGO V-C02E	All laser machines	VSGO V-C02E

	JJC CL-CS15	All laser machines	JJC CL-CS15

Recommended Lubricating Grease

Product		Applicable Models	Information
KLUBER LUBRICATION	KLUBER MICROLUBE GL 261	Spirit LS / Spirit LS PRO / Spirit GLS Hybrid / Spirit GLS Hybrid PRO / Piolas 280 / Piolas 400 / Piolas 400SE / FMC 280	KLUBER MICROLUBE GL 261
NSK	NSK GRS PS2	C180II / Spirit	NSK GRS PS2
idemitsu	IDEMITSU DAPHNE GREASE MP	S400	IDEMITSU DAPHNE GREASE MP

8.2 Maintaining the Work table and Motion System

8.2.1 Accessing the Work Table and Motion System

It will be important to gain full access to the work table and motion system to properly clean and maintain these areas. To do so, you will need to lift the SmartLID. You can do this via the following steps:

<u>Opening the SmartLID (left and right panels):</u>

1) Loosen two screws from machine inside and the back of the panel (as shown in the picture below)





2) Open the left and right panels



8.2.2 Cleaning the Work Table and Motion System

Clean the working table and the motion system on a frequent basis through the following steps:

1) Turn the power off and unplug the Piolas machine before cleaning.
2) Use a vacuum cleaner with a flexible nozzle to remove dust and debris from the work table and motion system.
3) Apply small amounts of all-purpose cleaner, alcohol, or acetone to a paper or cotton towel to clean the working table.
4) Apply a soap solution, all-purpose cleaner, or alcohol to a paper or cotton towel to wipe down the rai of the motion system.
5) Wait for all cleaning residue to dry completely before plugging in and operating the Piolas machine.

WARNING!

- **Never pour or spray alcohol or acetone directly to the work table.**
- **Oil, alcohol and acetone can cause fires or smoke build-up if improperly used.**

8.2.3 Lubrication of the X & Y Axis

To ensure the motion system operates smoothly, regular lubrication of the X and Y rails is required. We recommend injecting 0.1 ml of lubricant into the X linear rail using the lubrication syringe every two weeks. Additionally, apply a small amount of light-grade machine oil or grease to a paper or cotton towel and wipe the Y rails weekly.

NOTE

- Inject 0.1 ml of grease into the X linear rail of the Piolas series using the syringe every two weeks to properly maintain the motion system.
- Using unapproved grease may reduce rail lifespan and performance.
- Always clean and lubricate the X and Y rails after processing materials that produce heavy debris (such as wood).
- Applying excessive oil or grease to the Y rails may accelerate debris buildup.

The X rail of Piolas series uses a linear bearing design that requires regular lubrication.

Please follow the procedure below.


1. Open the SmartLID
2. Take the injection tool out of the accessory box and fill it with lubricants.




3. Assemble the L-type needle nozzle onto the tool.




4. Remove the protected cover from the carriage.

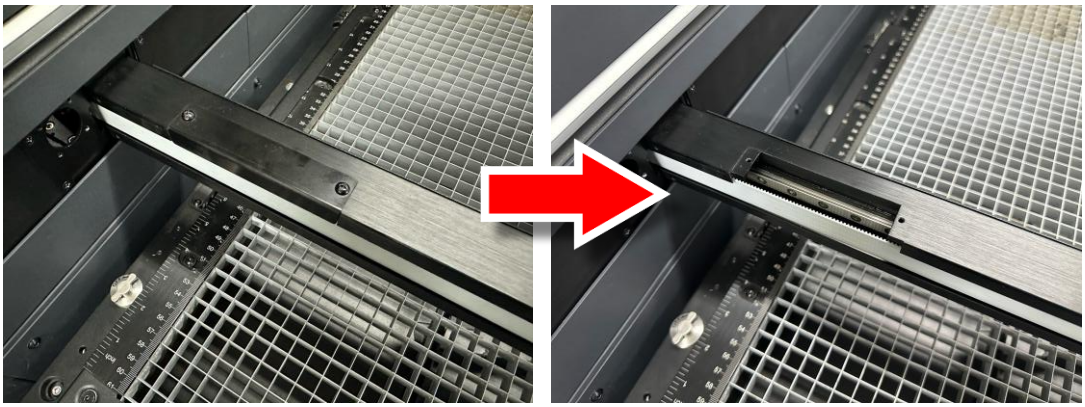

5. Slide the lens carriage to the left until the left injection opening appears.

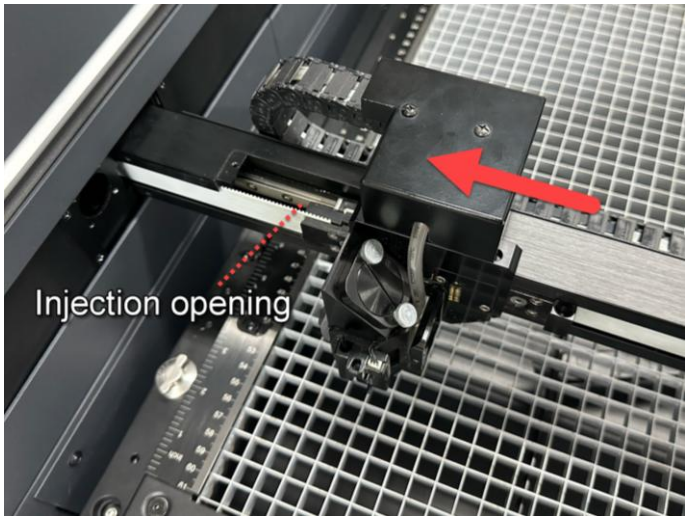

6. Inject small amount of grease to left injection opening inside the linear bearing

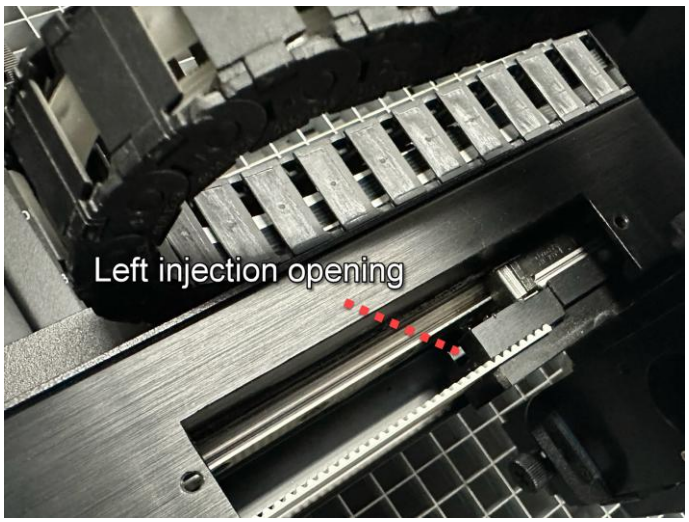


7. Slide the lens carriage all the way to the left until the right injection opening appears.



8. Inject small amount of grease to right injection opening inside the linear bearing.

9. Tight the cover back to the X rail.

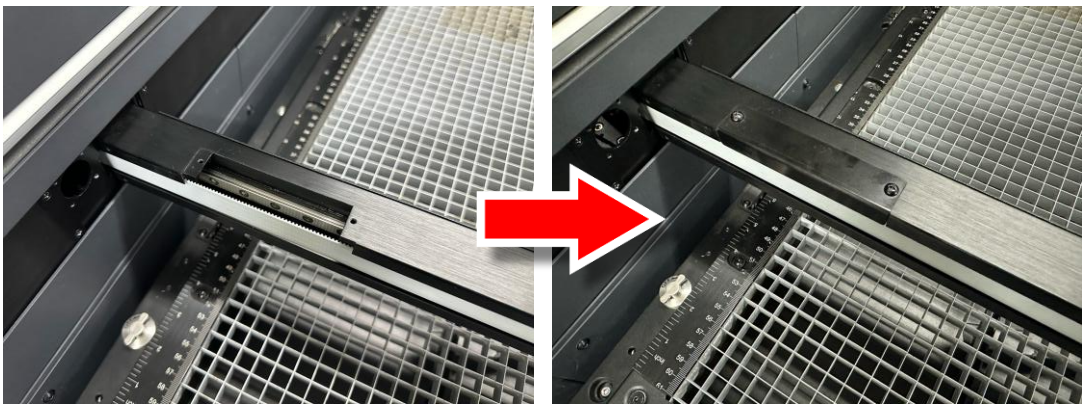

8.3 Cleaning the Optics System

8.3.1 Removing the Mirrors

We recommend that you check the mirrors once or twice a week to see if they require cleaning. If any debris or smoke residue is present, use the following steps to clean them.

NOTE

- Mirrors should be removed for cleaning one at a time to avoid beam misalignment after placing them back to the lens holders.
- Refer to section 8.3.2 on how to clean the mirrors.

The following section will illustrate the location of the four mirrors found on the LaserPro Piolas series for cleaning.

Mirror 1

Mirror #1 is located inside the bottom left access door panel of the LaserPro Piolas series.



1) Use a #8 Allen key to release the lock on the left panel.



2) Slide left to remove the left access panel



3) Remove the mirror 1 cover and loosen the thumbscrew securing mirror 1.

4) Remove the mirror and clean it properly.


5) After cleaning, place the mirror back into the optics holder.

6) Tighten the thumbscrew.

7) Close and secure all the covers.

Mirror 2

Mirror #2 is located inside the left back panel of the LaserPro Piolas series.

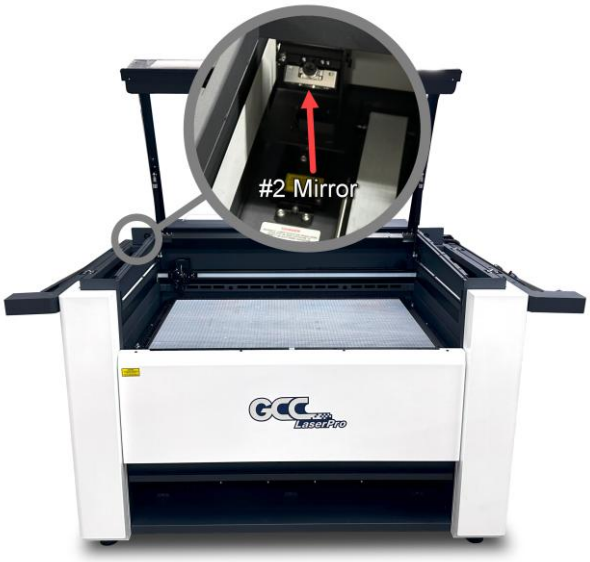

1) Remove the mirror 2 cover and loosen the thumbscrew securing mirror 2.
2) Remove the mirror and clean it properly.
3) After cleaning, place the mirror back into the optics holder.
4) Tighten the thumbscrew.
5) Close and secure all the covers.

Mirror 3

Mirror #3 is located inside the left panel of the LaserPro Piolas series.



1) Loosen the thumbscrew securing mirror #3.

2) Remove the mirror and clean it properly.

3) Place the mirror back to the optics holder after cleaning.

4) Tighten the thumbscrew.

Mirror 4

Mirror #4 is located at the top of the lens carriage.



1) Loosen 2 thumbscrew securing mirror #4.

2) Remove the mirror and clean it properly.

3) Clean the mirror in the proper manner.

4) Place the mirror back to the optics holder after cleaning.

5) Tighten the thumbscrew.

8.3.2 Cleaning the Mirrors

After you have removed each mirror, you will want to inspect each mirror for scratches, smoke residue, or debris. If any residue or debris is present, use the following steps to clean the mirrors.

1) Hold the mirror with the reflective side up, without touching the reflective side of the mirror (DO NOT apply any finger pressure or any other cleaning solutions to the mirror surface).

2) Drape a new sheet of lens tissue over the mirror.

3) Apply a few drops of lens cleaner on the tissue covered mirror (apply enough so that the tissue absorbs just enough solution to cover the mirror surface).

4) Pull the tissue across the mirror in only one direction.

5) Repeat the cleaning processes if the mirror is not completely clean after the first attempt.

6) Make sure that the mirror is completely dry before reinstalling it.





CAUTION!

- If the center of the mirror is scratched, contact your GCC LaserPro representatives for replacement.
- DO NOT apply any finger pressure or any other cleaning solutions to the mirror or focal lens surface.
- The optics components are very fragile, handle carefully and follow the cleaning procedure well.

8.3.3 Removing and Cleaning the Focal Lens

1) Please refer to chapter 7.3.1 to know how to remove the focal lens.
2) Clean the focal lens with a cotton swab and lens cleaner solution. Be sure to clean both sides of the focal lens **(DO NOT apply any finger pressure or other cleaning solutions to the lens surface).**
3) After cleaning, use a cotton swab to gently dry the focal lens and lens cover.

8.4 Cleaning the Exhaust Duct

Efficient exhaust ventilation is crucial to laser cutting quality. We suggest you to clean the Exhaust Duct from accumulated dust regularly will help to maintain the ventilation efficiency of your laser engraving system.

Step 1. Remove screws fixing the rear door panel of laser machine

Step 2. Remove screws securing exhaust duct on rear door panel

Step 3. Open the rear door and take out the exhaust duct to clean with water

Step 4. Fix and secure the exhaust duct and rear door panel back to the laser machine

Chapter 9
Basic Troubleshooting

Quality Problems

- Check focal length setting under F4 function key Machine Setting. Set Focus Lens to see if it matches the type of the lens installed.
- Check if the focal lens is installed correctly or if focal lens is not fixed properly.
- Check if it is caused by the debris or dust builds up in the bearing tracks of X rail.
- Check if it is caused from the damaged or dirty focal lens and mirror 4 in the lens carriage which cannot deliver the laser beam effectively.

Non-operational Problems

- Laser does not fire
    1. If the red alignment beam is not visible, the laser beam may be misaligned. Adjust the reflection mirrors for exact focus.
    2. If the red alignment beam is visible, please check the driver power. The laser power may be set to too low for detection. Increase the percentage setting of the Laser Power from the software driver or the control panel.
    3. Check if the laser power connector is connected.
    4. For safety purposes, the laser will not fire when the top lid or the front door is open unless the door sensors are defeated by shorting them with magnets.
    5. Check water level or temperature of water cooler if the equipped laser requires water cooling. The laser tube will automatically shut down itself if the laser tube is over-heated.

> **NOTE**
> Unplug the machine before examining the mirrors, lens, motion system or any other part of the laser system.

Other Problems

- "Graphic Was Clipped…" Message

  The size or location of graphic image may be bigger or beyond the legal working area. Do not place graphic object, especially vectors, right from (3,0) origin position, or 0 at either x or y rail of working area on application software. Take Corel Draw for instance, even when the vector line’s width has been set to the thinnest, it may still go beyond the border and causes the error. If the message appears randomly but frequently even image object is smaller or within the legal border, check or

change DRAM module, a bad contact or faulty DRAM could cause such error.

- Auto Focus Pin is Not Functioning

  The focus pin could be stocked by greasy residue that gradually forms a coating. Clean the probe with alcohol or acetone. Check the cable of focus pin, there might be a bad contact or breakage.

Chapter 10
Basic Troubleshooting

- Glossary
- LaserPro Piolas Series Specification Sheet

10.1 Glossary

Color Fill – Term within the awards and engraving industry used to describe the variety of techniques used to add color or contrast to engraving.

DPI – Dots Per Inch or Pixels Per Inch. The resolution of an image is defined by the amount of dots/pixels included in an inch. The DPI setting of 500, will tell the machine to include 500 laser firings within an inch.

Driver – A software program that allows the computer to communicate with its components and peripherals: printers, scanners, monitors, etc.

Error Diffusion (Dithering Method) - This effect uses a series of random black and white pixels to represent shading.

Firmware – Programming permanently set into a computer's ROM chips. This information is burned into the computer chips and can only be changed by replacing the chips, or in the case of EEROM, by special procedure.

PPI – Pulses Per Inch. PPI determines the gross amount of laser pulses there will be per linear inch. PPI is exclusively used for the vector setting. A PPI setting of 500 results in the laser firing every .002" (500 times per inch). If the standard lens is producing a vector laser focal point of .007", then higher. PPI settings will result in deeper, overlapping laser pulses. PPI settings lower than 150 will result in the individual laser pulses being spread far apart, so they will not touch each other. Low PPI settings are a good example of perforate paper.

Raster – The process of rendering a cutting or engraving by multiple horizontal lines. For example: when cutting out or engraving a square, the raster setting will make the laser use numerous horizontal lines to fill in the outlined space.

Raster Image – An image that is defined as a collection of arranged pixels in a rectangular array of lines. A raster image is similar to a "Bitmap" graphics image.

Raster Line – A raster line is the individual horizontal line that makes up the raster image.

Vector – The process of cutting or engraving an image by using single horizontal, vertical and curved lines. For example: when cutting out or engraving the outline of a square, the vector setting will make the laser use a thin single line to follow the outline of the shape.

10.2 LaserPro Piolas Series Specification Sheet

Model		Piolas 280	Piolas 400	Piolas 400SE
Work Area	without CCD	710 x 510 mm (27.9 x 20 in.)	1,016 x 610 mm (40 x 24 in.)	
	with CCD			
Max. Part Size (W x L x H)		790 x 579 x 210 mm (31.1 x 22.8 x 8.3 in.)	1,091 x 680 x 280 mm (43 x 26.8 x 11 in.)	
Max. Part Size (W x L x H) (with pass-through door module)		671 x ∞ x 135 mm (26.4 x ∞ x 5.3 in.)	1,064 x ∞ x 165 mm (41.9 x ∞ x 6.5 in.)	
Working Table		Standard Alu Grid Cutting Table with leveling adjustment	Standard Alu Grid Cutting Table with leveling adjustment	Standard Alu Grid Cutting Table w/o leveling adjustment
Working Table Size		719 x 514 mm (28.3 x 20.2 in.)	1,021 x 614 mm (40.2 x 24.2 in.)	
Dimensions (L x W x H)		1212 x 936 x 1123mm (47.7 x 36.9 x 44.2 in.)	1,511 x 1,107 x 1,123mm (59.5 x 43.6 x 44.2 in.)	
Weight		341 kg / 752 lb	392 kg / 864 lb	
Laser Source	CO2	60 ~ 120W		
	Fiber	N/A		
	Dual	N/A	N/A	60 ~ 120W CO2 Laser 30 ~ 60 W Fiber laser
Cooling		80W~120W - Air-cooled, Operating environment temperature 15°- 30°C (59°- 86°F)		
Drive		AC Servo System		
Camera	SmartEYES	Standard		
	Live-view camera	Standard		
	SmartVISION Elite	Optional		
Maximum Engraving Speed*		4.19 m/s (165 in/s)	4.44 m/s (175 in/s)	
Speed Control		Adjustable from 0.1~100% (Up to 16 color-linked speed settings per job)		
Power Control		Adjustable from 0~100% (Up to 16 color-linked power settings per job)		
Engraving Capability		256-level gray scale image processing capability		
Z-Axis Movement		Automatic		
Focus Lens		CO_2: Standard 2.5" (Optional 1.5", 2.5", 3.0" & 4.0")		
Resolution (DPI)		Available 125, 250, 300, 380, 500, 600, 760, 1000, 1500		
Interface		10 Base-T Ethernet USB Type-A 2.0 – For USB storage (Max. 32GB capacity, FAT file system) USB Type-B 2.0 for USB Storage – For connecting with the computer		
Compatible Operating Systems		MS Windows		
Control Panel		7" Touch panel		
Safety		Class 1 Laser Product Complies with EN60825-1:2014, EN ISO 13849-1:2023 Class 2 Laser Product Complies with CDRH for CO2 Laser 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module		
Operation Voltage		80Watt and above, 200-240VAC, 50/60HZ Auto Switching, max. 15A		
Exhaust Port Diameter		Upper exhaust port diameter: 4" (101mm) / Lower exhaust port diameter: 5" (127mm)		
Fume Extraction System**		External exhaust system with minimum flow rate 800m3/h (CFM 471 ft3/min) is required, 2.3kPA negative pressure (Pure-Air PA-1500FS @ 4" exhaust port)		

* Speed is not equal throughput. See dealer or visit http://www.GCCworld.com for more details.

** The flow rate is determined by a default fume extraction system; the flow rate may vary due to a different fume extraction system.

∆ Specifications are subject to change without prior notice.